

MULTI-CYLINDER VULCANIZING MACHINE SOLUTION EXPERT

上置式硫化机方案解决专家





公司简介

Company profile



董事长
戴丹 先生

Chairman Mr. Dai Dan

企业实景

Huahan Headquarter

大连华韩智能装备有限公司

大连华韩智能装备有限公司是由橡胶行业的顶尖专家组成。我们不仅是世界一流的橡胶硫化厂、橡胶成型设备和橡胶输送带压机制造商，也是领先的橡胶加工行业一站式系统解决方案提供商。我们通过结合广泛的专业知识和能力，开发了几乎所有类型的橡胶机械设备和压机生产线，以满足客户的独特要求，并坚定地保持我们在该行业的领导地位。持续运转的生产线和机械运转的轰鸣声，正是华韩人专业技能和不屈不挠精神的体现。同时也为世界橡胶工业的发展贡献了华韩的力量。

Dalian Huahan Intelligent Equipment Co., Ltd.

Dalian Huahan was established by a group of leading experts in the rubber industry. We are not only a world-class rubber vulcanization machinery, rubber molding equipments and rubber conveyor belt presses manufacturer but also a leading rubber processing industry one-stop system solution provider. We have developed almost all type of equipments and press lines for rubber machinery industry by combining broad expertise and capabilities to meet the customer unique requirements with the strong determination to maintain our leadership in this industry. The ceaselessly operating production lines and the hum of machinery stand as testament to the expertise and tireless efforts of Huahan people, while also contributing Huahan strength to the development of the world's rubber industries.





上置式平板硫化机

Multi-cylinder Vulcanization Machine



设备特点/Features

- 由众多的小油缸均匀作用在热板上，保证硫化时制品上的硫化压力均匀，硫化品质远远优于传统下置式平板硫化机。
- 油缸压力可以实现分组控制，使得制品宽度差异比较大时，品质仍然保持稳定。
- 合理的液压系统设计，使得硫化主机装机容量只有传统下置式平板硫化机的三分之一，大大节约运行成本。
- 主机直接放置到地面，不用像传统下置式平板硫化机需要打很深的地坑，大大节省基建成本，而且现场整洁。
- 整个流程始终维持在同一水平上，操作非常方便。
- 由于合理设计，日常维护非常方便。
- Many small cylinders act evenly on the hot plate to ensure uniform pressure on the products during vulcanizing, and the vulcanization quality is much better than the traditional lower cylinder vulcanizing press.
- Cylinder pressure can be controlled in groups, so that the quality remains stable when the width of the products varies greatly.
- Reasonable design of hydraulic system makes the installed capacity of the vulcanizing machine only one third of the traditional lower cylinder vulcanizing press, which greatly saves the operating cost.
- The main machine is directly placed on the ground, no need to play a deep pit like the traditional lower cylinder vulcanizing press, which greatly saves the cost of infrastructure, and the site is neat and tidy.
- The whole process is always maintained at the same level, which is very convenient to operate.
- Due to the reasonable design, the daily maintenance is very convenient.

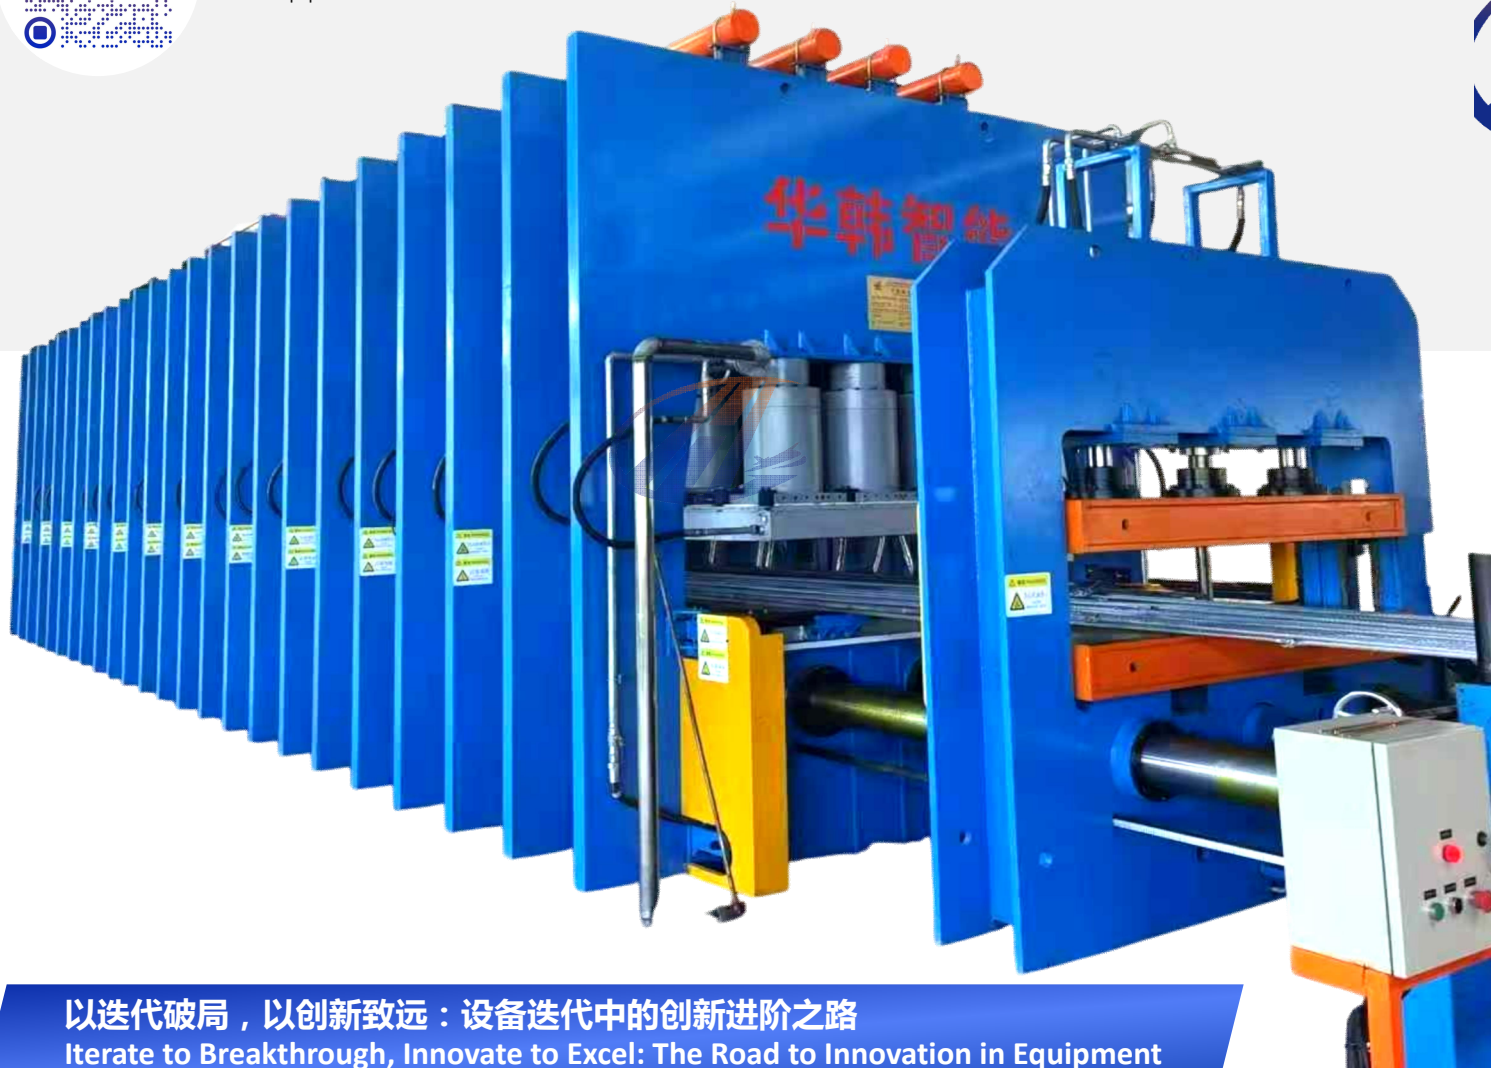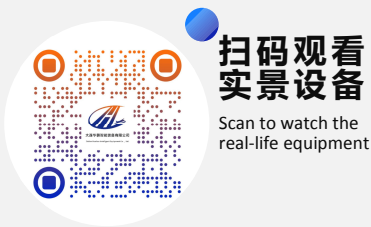

以迭代破局，以创新致远：设备迭代中的创新进阶之路
 Iterate to Breakthrough, Innovate to Excel: The Road to Innovation in Equipment

我们的设备迭代不止、创新不息。深耕用户需求，打磨细节、突破技术，以一代代进阶之作，解锁行业新可能。

Our equipment is constantly iterating and innovating. Deeply cultivating user needs, polishing details, breaking through technology, and unlocking new possibilities in the industry through generations of advanced works.



备注：1.以上规格公司保留变更权，如因设计变更时，恕不另行通知。
 2.如有非标准规格，可依据客户需求设计与制造。

Notes: 1. The company reserves the right to modify the specifications above without prior notice in case of design changes.
 2. For non-standard specifications, design and manufacturing can be carried out based on customer requirements.




扫码咨询
 Scan to consult



织物芯输送带硫化生产线

Textile/Fabric Reinforcement Conveyor Belt Vulcanization Press Line

设备组成/Equipment Composition

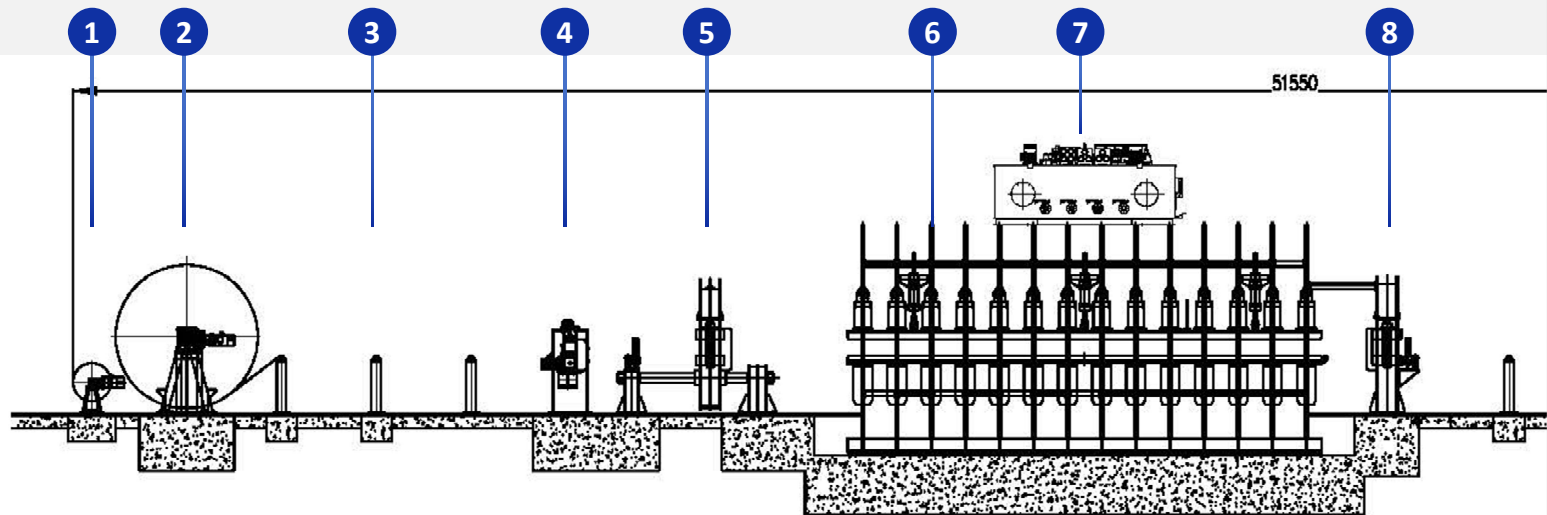

- | | | | | | | |
|--------------------------|--------------------|----------------|---------------------------|--------------------------|----------------------------|--------------------|
| 1. 垫布卷取 | 2. 生带导开 | 3. 托辊组 | 4. 前牵引 | 5. 前夹持拉伸 | 6. 主硫化机 | 7. 液压系统 |
| 1.Liner cloth winding up | 2.Raw belt let-off | 3.Group Roller | 4.Front Pull roll Machine | 5.Front Clamping Stretch | 6.Main Vulcanizing Machine | 7.Hydraulic System |

设备特点/Features

采用智能温控与液压闭环控制系统，硫化压力均匀稳定、温度精度达 $\pm 1^{\circ}\text{C}$ ，确保织物芯输送带接头强度与耐用性达标；模块化设计适配不同带宽（500-2400mm）与层数需求，自动化程度高，可实现接头定位、硫化、冷却全流程高效联动，大幅降低人工成本。

Adopting an intelligent temperature control and hydraulic closed-loop control system, it features uniform and stable vulcanization pressure with a temperature accuracy of $\pm 1^{\circ}\text{C}$, ensuring that the joint strength and durability of fabric-core conveyor belts meet standard requirements. With a modular design suitable for different belt widths (500-2400mm) and layer count needs, it boasts high automation, enabling efficient linkage of the entire process from joint positioning, vulcanization to cooling, and significantly reducing labor costs.





业务覆盖

Business Coverage



全球 26+ 国家
Over 26 Countries globally



全球 50+ 客户/代理商
Over 50 customers/agents worldwide



扫码观看
企业全景

Scan the QR code
for a panoramic view
of the enterprise




全国 200+ 客户

Over 200 customers nationwide



全国 300+ 合作商

Over 300 cooperative partners nationwide

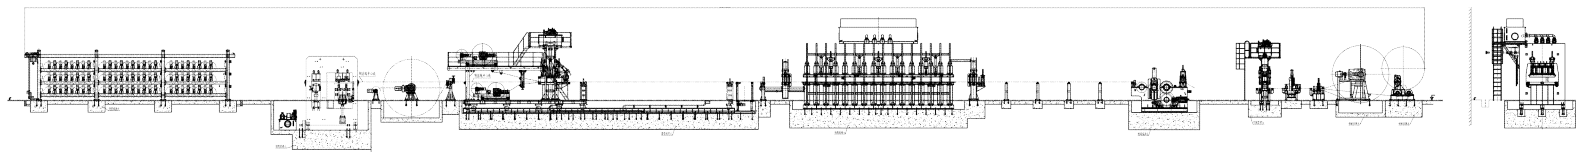

联系我们 | Contact Us

邮箱 | E-Mail: sales@hh-hz.com

手机 | Cell Phone: 155-4265-6399

邮编 | Zip Code: 116400

WhatsApp: 15142420383

地址 | Address: 中国辽宁省大连市庄河市三环大街219号

No. 219, Sanhuan Street. Thuinghe City, Dalian City, Liaoning Province. China



中国官网
Chinese Website



国际官网
Global Website



官方微信
Company Wechat