

RGC系列 金属板水泥电阻器

Series RGC Metal Plate Cement Resistors

产品特点 FEATURES

- ▶ 功率型检测电流用电阻器Power type current detecting resistors.
- ▶ 瓷壳型不燃，安全可靠Flame retardant resistors in Ceramic Case.
- ▶ 低电感量Low inductance.
- ▶ 体积小，节省空间Space saving
- ▶ 引线成型可按用户要求特殊加工Lead wire forming can be processed according to customer's requirement

外形尺寸 DIMENSIONS

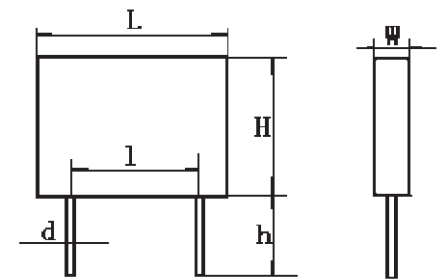


图1 Figure1



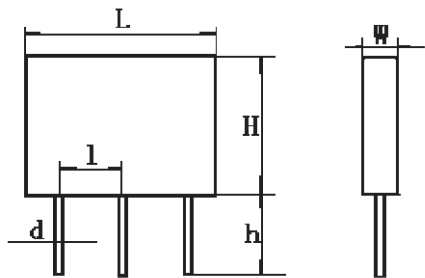


图2 Figure2

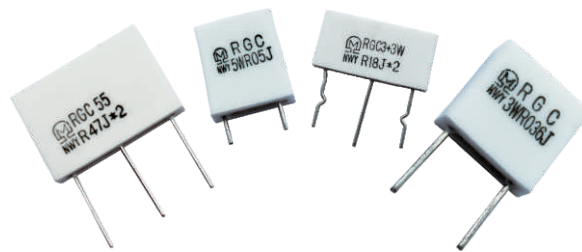

降功耗曲线 POWER DERATING CURVE

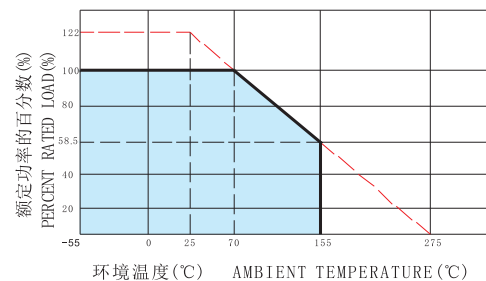

型号 Type	尺寸Dimensions(mm)						
	L ± 1	W ± 1	H ± 1	l ± 1	h ± 1	d ± 0.05	备注 Remark
RGC2	14	5	8	9	10	0.8	图1 Figure1
RGC3	14	5	13				
RGC5	14.5	5	18				
RGC10	26	5	20	20		0.8	图2 Figure2
RGC22	26	5	8				
RGC33	26	5	13				
RGC55	26	5	20				
RGC77	26	5	20				

技术说明 TECHNICAL SPECIFICATIONS

型号 Type	额定功率 Power Rating(W)	阻值范围 Resistance Range (Ω) J: ± 5%, G: ± 2%	温度系数 T.C.R. (10 ⁻⁶ /°C)	绝缘电压 Dielectric withstanding voltage (V)
RGC2	2W	0.01 ~ 2.4	± 350	700
RGC3	3W			
RGC5	5W			
RGC7	7W	0.01 Ω ~ 3.3 Ω		
RGC10	10W	0.01 Ω ~ 3.3 Ω		
RGC22	2W+2W	(0.1+0.1 ~ 1+1)		
RGC33	3W+3W			
RGC55	5W+5W			
RGC77	7W+7W			