


RX23系列 瓷壳型线绕固定电阻器

Series RX23 Ceramic case wirewound fixed resistors



产品特点 FEATURES

- ▶ 阻值低、体积小、负荷大、性能稳定
Low resistance, small volume, large power capacity, stable performance
- ▶ 采用瓷壳包封，使用温度范围：-55℃~+155℃。
Ceramic case package and operating temperature from -55℃ to +155℃

外形尺寸 DIMENSIONS

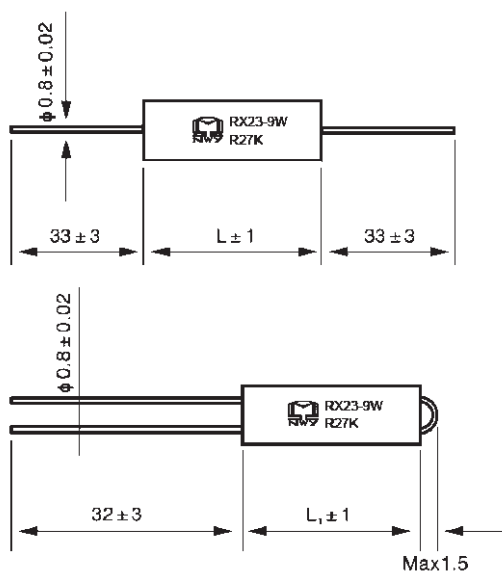

降功耗曲线 POWER DERATING CURVE

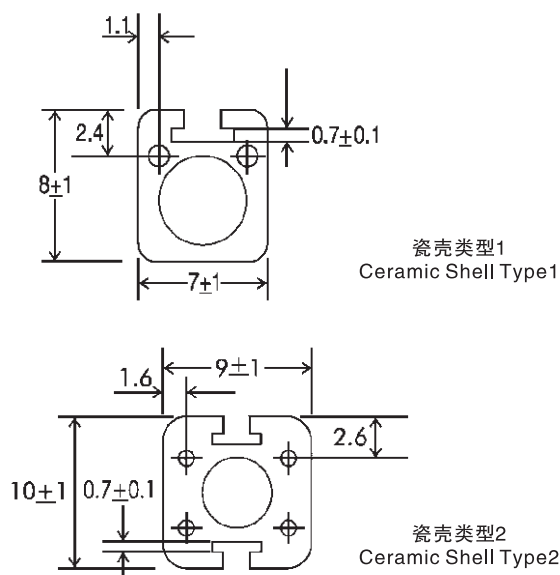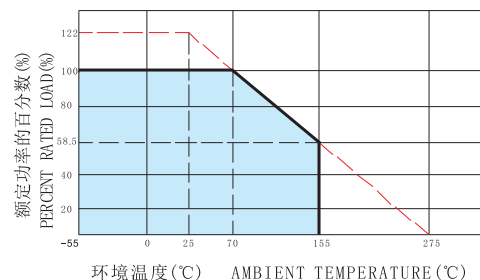

技术说明 TECHNICAL SPECIFICATIONS

型号 Type	尺寸L ₁ Dimensions L ₁	瓷壳类型 Ceramic Shell Type	额定功率 Power Rating(W)	阻值范围 Resistance Range(Ω)		精度 Tolerance	温度系数 T.C.R.(10 ⁻⁶ /°C)
				Min	Max		
RX23-4W	20	1	4	0.1	1.5k	± 5% J ± 10% K	± 120 for <0.1 Ω (Average) ± 80 for <1.0 Ω (Average) ± 60 for <100 Ω (Average) ± 90 or ± 30 for >100 Ω depending on wire selected
RX23-5W	25		5	0.1	2.2k		
RX23-7W	38		7	0.1	3.9k		
RX23-7W	25	2	7	0.1	2.2k		
RX23-9W	38		9	0.1	3.9k		
RX23-11W	50		11	0.1	5.6k		
RX23-17W	75		17	0.1	10k		