

RX28系列 铝壳线绕固定电阻器

Series RX28 Aluminium case wirewound fixed resistors


产品特点 FEATURES

- ▶ 体积小，功耗大 Miniature size and high power
- ▶ 软线引出，适合各种条件 Soft leads fit all kinds of condition
- ▶ 性能稳定，绝缘性能好 Stable performance and better insulating property.
- ▶ 抗浪涌，耐冲击 Withstand impact of high surge current.


应用 APPLICATIONS

- ▶ 用于充电设备过流保护 Overcurrent protecting in the chargeable devices and so on.
- ▶ 用于电源电路和设备中的过流和过压保护 Overcurrent and overvoltage protection of the equipment and power supply circuit.
- ▶ 汽车电子制动 Applying to the brake of electrocircuit in automobile.

降功耗曲线 POWER DERATING CURVE

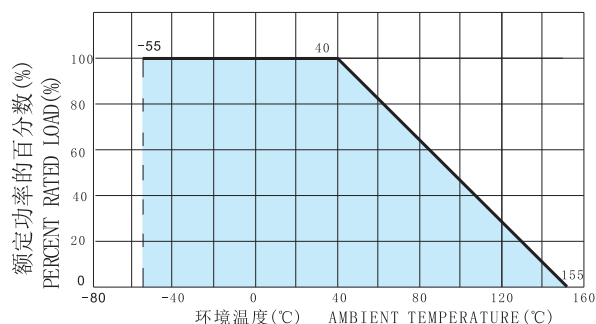

外形尺寸 DIMENSIONS

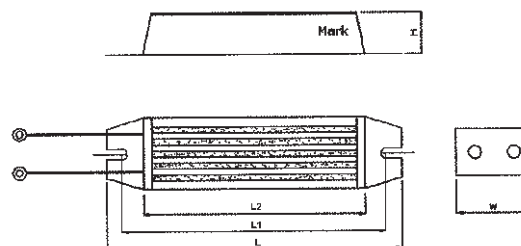

型号 Type	尺寸Dimensions(mm)				
	L ± 2	L1 ± 2	L2 ± 2	W ± 2	H ± 2
RX28-60W	100	90	75	30	13
RX28-80W	130	118	108	42	21
RX28-120W	182	167	157	42	21
RX28-150W	182	167	157	42	21

技术说明 TECHNICAL SPECIFICATIONS

型号Type	额定功率 Rating power(W)	阻值范围 Resistance Range(Ω)	阻值精度 Tolerance Range	使用温度范围 Working temperature	温度系数 T.C.R.(10 ⁻⁶ /°C)	绝缘耐压 Dielectric withstanding voltage(V)
RX28-60W	60W	0.1~5.1k	± 5%(J) ± 10%(K)	-55°C ~ 155°C	± 250	2000
RX28-80W	80W	0.1~5.6k				2000
RX28-120W	120W	0.5~9.1k				2000
RX28-150W	150W	0.5~9.1k				2000