

RXLG 铝外壳线绕电阻器

RXLG high power aluminum case wirewound fixed resistors


产品特点 FEATURES

- ▶ 体积小，功耗大 Miniature size and high power
- ▶ 可以有两种型，普通型，无感型 There are two types both ordinary and non-inductance
- ▶ 可以大电流下工作 Worked in a large current
- ▶ 性能稳定 Stable characteristics
- ▶ 可以在恶劣的工控条件的设备上工作 Suitable working of automatic equipment for hard condition .

应用 APPLICATIONS

- ▶ 变频器 Frequency controller
- ▶ 电力系统的控制 the control of electrical power system
- ▶ 机车机床等数控设备 equipments of locomotive and machinery with digital control etc
- ▶ 用于老化设备 Suitable aging equipment.

降功耗曲线 POWER DERATING CURVE

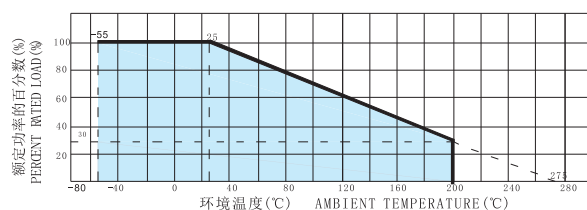

外形尺寸 DIMENSIONS


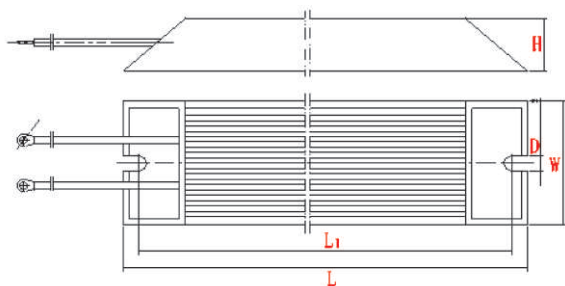


Figure1 图1

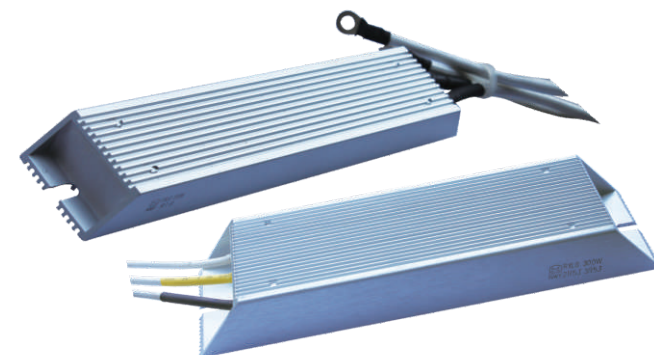

功率 Power	尺寸Dimensions(mm)						图号Figure
	L ± 2	L1 ± 2	W ± 2	H ± 2	D ± 1	W1 ± 1	
60W	115	97	40	20	5.5	—	Figure1 图1
80W	140	123	40	20	5.5	—	
100W	165	148	40	20	5.5	—	
120W	190	173	40	20	5.5	—	
150W	215	197	40	20	5.5	—	
200W	165	148	60	30	5.5	—	
300W	215	197	60	30	5.5	—	
400W	265	247	60	30	5.5	—	Figure2 图2
500W	335	315	60	30	5.5	—	
600W	335	317	61	59	5.5	41	
800W	400	382	61	59	5.5	41	
1000W	400	380	50	107	5.5	30.5	
1200W	450	430	50	107	5.5	30.5	
1500W	485	463	50	107	5.5	30.5	Figure2 图2
2000W	550	530	50	107	5.5	30.5	

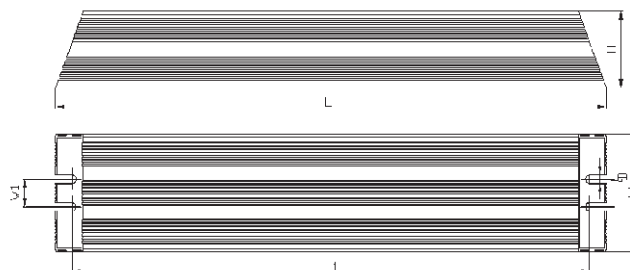


Figure2 图2