

RXLB 超薄铝壳线绕固定电阻器

RXLB ultrathin aluminum case wirewound fixed resistors


产品特点 FEATURES

- ▶ 体积小，功耗大 Miniature size and high power
- ▶ 可以大电流下工作 Worked in a large current
- ▶ 性能稳定 Stable characteristics
- ▶ 可以在恶劣的工控条件的设备上工作 Suitable working of automatic equipment for hard condition.


应用 APPLICATIONS

- ▶ 变频器 Frequency controller
- ▶ 电力系统的控制 the control of electrical power system
- ▶ 机车机床等数控设备 equipments of locomotive and machinery with digital control etc
- ▶ 用于老化设备 Suitable aging equipment.

降功耗曲线 POWER DERATING CURVE

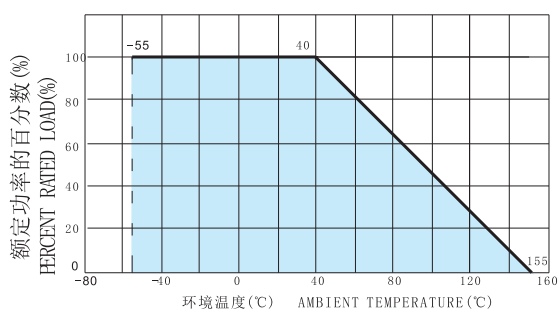

外形尺寸 DIMENSIONS

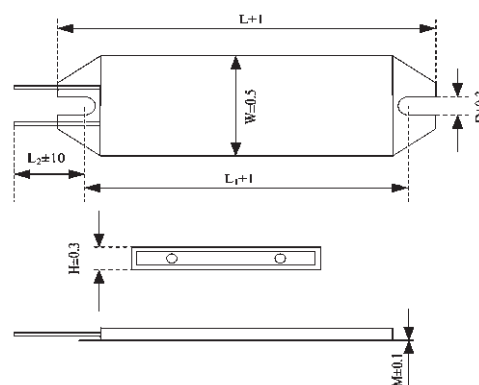

功率 Power	尺寸Dimensions(mm)						
	L ± 2	W ± 0.5	H ± 0.3	L1 ± 2	D ± 0.3	M ± 0.3	L2 ± 10
40W	100	40	8	85	5	1	250
65W	135	40	8	125	5	1.2	250
100W	140	40	8	130	5	1.2	250
120W	165	40	8	155	5	1.2	250

技术说明 TECHNICAL SPECIFICATIONS

型号Type	额定功率 Rating power(W)	阻值范围 Resistance Range(Ω)	阻值精度 Tolerance Range	温度系数 T.C.R.(10 ⁻⁶ /°C)	绝缘耐压 Dielectric withstanding voltage(V)
RXLB	40	0.5-1k	± 5%(J) ± 10%(K)	± 250	2000
	65	0.5-1k			2000
	100	0.5-1k			2000
	120	0.5-1k			2000