


KP-802

Kiosk Printer

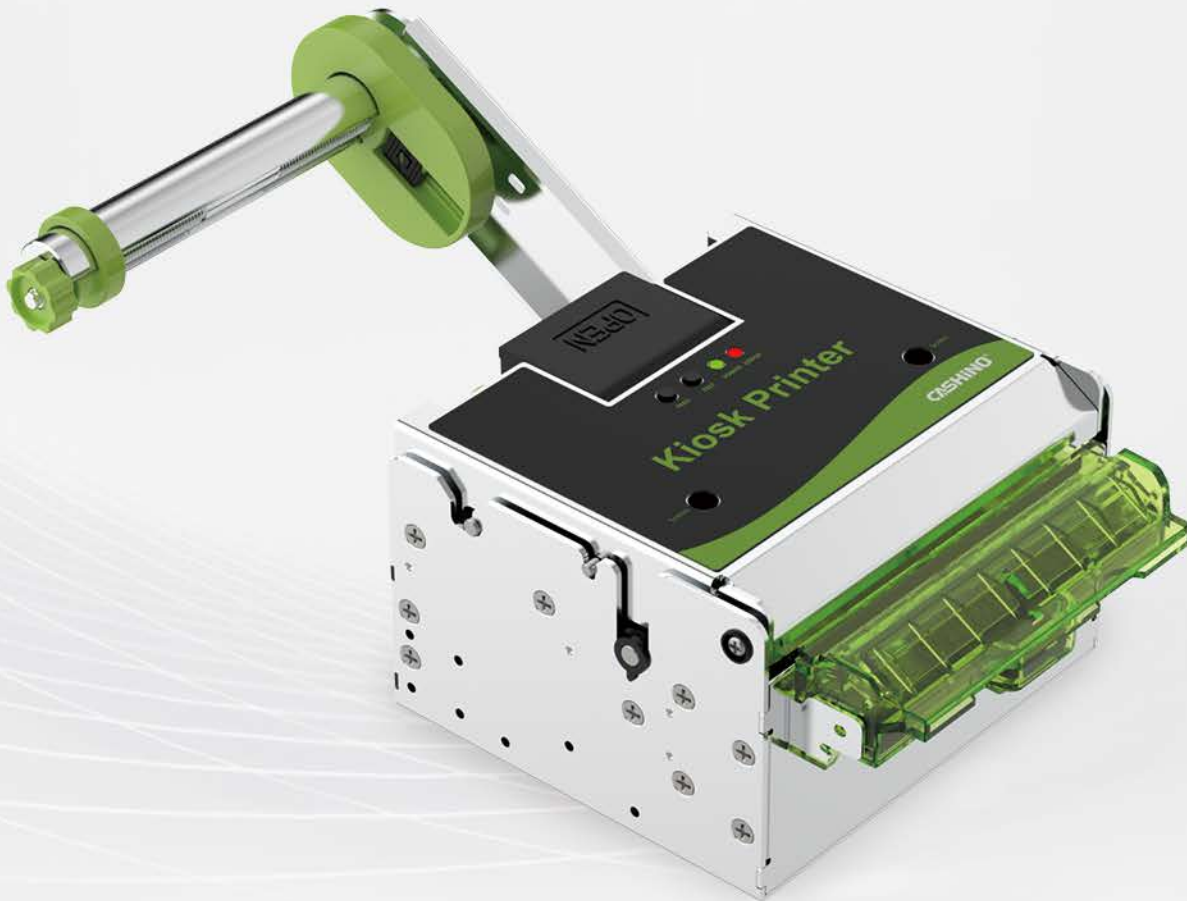

| Product Features

- Small size, high integration
- Low noise and strong reliability
- Fast printing speed and high quality
- Support black mark, anti drag paper ,anti paper jam ,paper near end detection
- Special engineering plastic paper outlet
- Automatic paper feeding and automatic paper cutting function
- Support 60/80/82.5mm thermal paper
- Black mark detection can be unlimited adjustment
- Applicable to medical, retail, prize entertainment, sports lottery and other fields

Products photo

Product model		KP-802	
Printing	Printing method	Direct Thermal	
	Print width(max)	80mm	
	Print resolution	203dpi(576dots/line)	
	Print speed max	250mm/s(Max)	
	Paper loading	Easy loading	
Paper	Type	Thermal paper,Black mark paper	
	Width	58-82.5mm	
	Roll paper diameter(O.D)	150mm	
	Roll core inner diameter	25mm	
	Paper Thickness	0.055 to 0.09mm	
Memory	SRAM	94K bytes	
	Flash	256K bytes	
Character set	Font	Font A:12x24;Font B:9x17 GBK:24x24	
Barcode	1D barcode	EAN-18,EAN-13,EAN-8,CODE39,CODE93.CODE128.CODABAR.ITF.UPCA,UPCB,Graphic	
	2D barcodes	QR CODE,PDF417	
Interface	Standard	USB+RS232	
	Option	USB+LAN	
Sensor	Standard	Printer head Temperature, Cover open,Cutter HOME point detection, auto feed paper, take out paper,Paper near ending, Black mark	
	Option	Anti paper jam and drag	
Reliability	Cutter	Full+Partial cut	
	Pulse Activation	1,000,000 cuts	
	TPH Life	100km	
Input Power	AC	AC100V-240V 50/60Hz	
	DC	DC24V/2A	
Physical	Dimensions(WxLxH)mm	142x143x73mm	
Emulation		ESC/POS TSPL	
Software	Driver	Windows Driver,Linux Driver,OPOS Driver	
	SDK	Windows SDK,Android SDK,Linux SDK	
Environment	Temperature	Operating:10°C~50°C	Storage:-20°C~70°C
	Humidity	Operating:20%RH~85%RH	Storage:10%~90%RH

Application

