


KP-803

Kiosk Printer

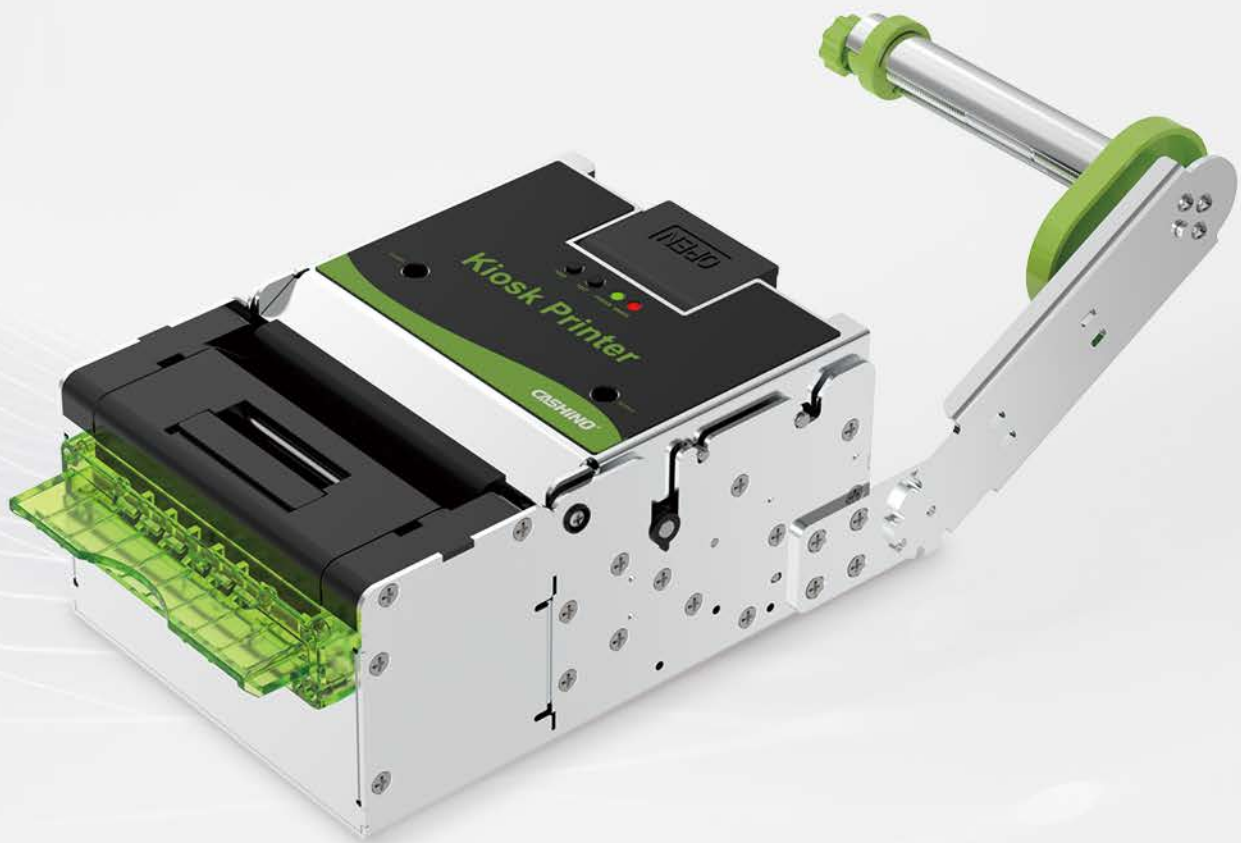

| Product Features

- Small size, high integration
- Low noise and strong reliability
- Fast printing speed and high quality
- Support black mark, anti drag paper, anti paper jam, paper near end detection
- Special engineering plastic paper outlet
- Support paper presenter function
- Automatic paper feeding and automatic paper cutting function
- Black mark detection can be unlimited adjustment
- Applicable to medical, retail, prize entertainment, sports lottery and other fields

| Products photo

Product model		KP-803	
Printing	Printing method	Direct Thermal	
	Print width(max)	80mm	
	Print resolution	203dpi(576dots/line)	
	Print speed max	250mm/s(Max)	
	Paper loading	Easy loading	
Paper	Type	Thermal paper,Black mark paper	
	Width	58-82.5 mm	
	Roll paper diameter(O.D)	150mm	
	Roll core inner diameter	25mm	
	Paper Thickness	0.055 to 0.09mm	
Memory	SRAM	94K bytes	
	Flash	256K bytes	
Character set	Font	Font A:12x24;Font B:9x17 GBK:24x24	
Barcode	1D barcode	UPC-A, UPC-E, JAN/EAN8, JAN/EAN13, CODE39, ITF, CODEBAR, CODE128, CODE93	
	2D barcodes	QR CODE,PDF417	
Interface	Standard	USB+RS232	
	Option	USB+LAN	
Sensor	Standard	printhead temperature,platen position detection,cutter home position detection,auto paper feed,paper out detection,paper near end ,black mark detection	
	Option	Paper Dispenser + paper discharger with Recycling	
Reliability	Cutter	Full/Partial cut	
	Pulse Activation	1,000,000 cuts	
	TPH Life	100km	
Input Power	AC	AC100V-240V 50/60Hz	
	DC	DC24V/2A	
Physical	Dimensions(WxLxH)mm	191x143x73 mm	
Emulation		ESC/POS	
Software	Driver	Windows Driver, Linux Driver, OPOS Driver	
	SDK	Windows SDK, Android SDK, Linux SDK	
Environment	Temperature	Operating:10°C~50°C	Storage:-20°C~70°C
	Humidity	Operating:10%RH~85%RH	Storage:10%~90%RH

| Application

