
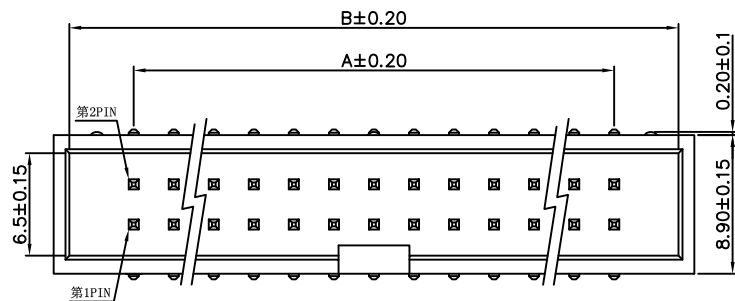



P. C. B Hole Layout

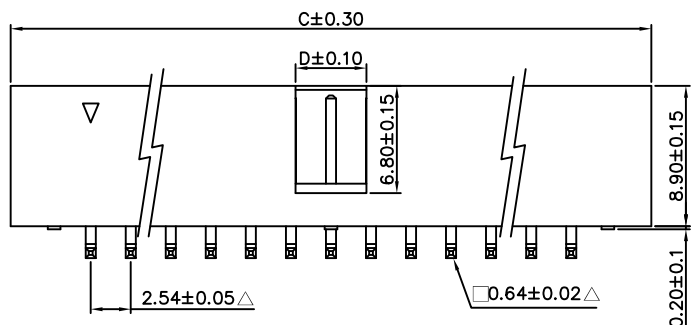

Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms min.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	:-40°C ~ +105°C
Soldering Temperature	:260°C for 3~5sec Max.
Contact Material	:Copper Alloy
Insulator Material	:Polyester, UL 94V-0
Standard	:Nylon-6T
Finish	:Tin, Gold or Duplex Plated
Standard	:Gold Flash all over

PIN NUMBER	A(mm)	B(mm)	C(mm)	D(mm)
6PIN	5.08	12.92	15.24	4.0
8PIN	7.62	15.46	17.78	
10PIN	10.16	18.00	20.32	4.5
12PIN	12.70	20.54	22.86	
14PIN	15.24	23.08	25.40	
16PIN	17.78	25.62	27.94	
20PIN	22.86	30.70	33.02	
26PIN	30.48	38.32	40.64	
30PIN	35.56	43.40	45.72	
34PIN	40.64	48.48	50.80	
40PIN	48.26	56.10	58.42	
50PIN	60.96	68.80	71.12	
60PIN	73.66	81.50	83.82	
64PIN	78.74	86.58	88.90	

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
B210	X	X	X	DXXX	XX
(Box Header) B210(2.54 H:9.1 w:9.1)	M:SMT Type M0:1.5mm ⋮	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin Y:Gold Flash/Tin 30U" (Standard:G)	N:Nylon-6T (Standard:N)	M-D D-095 (Standard:M-D088)	(Contacts) (06 TO 64)

东莞华连电子有限公司

DESCRIPTION(内容):	DRAWN(製圖):	GENERAL TOLERANCE:	REV:	REV	DESCRIPTION	DATE
2.54mm Box Header H:9.1 W:9.1 □=0.64 SMT, Nylon-6T(環保材料)	袁仕潤	(公差)	A/1			
	CHECKED(確認):	.X 0.2 .XXXX .XX 0.15 .X ° .XXX 0.1 .XX°	UNIT: mm	1	△此符號表示重點管控尺寸	2007.09.17
PART NO: (料號) B210-M0GN-D095-XX	APPROVAL(核准):	SCALE(比例): 1:XX	SIZE: A4	2		
DWG NO(圖號):			SHEET: 1/1	3		
				4		