


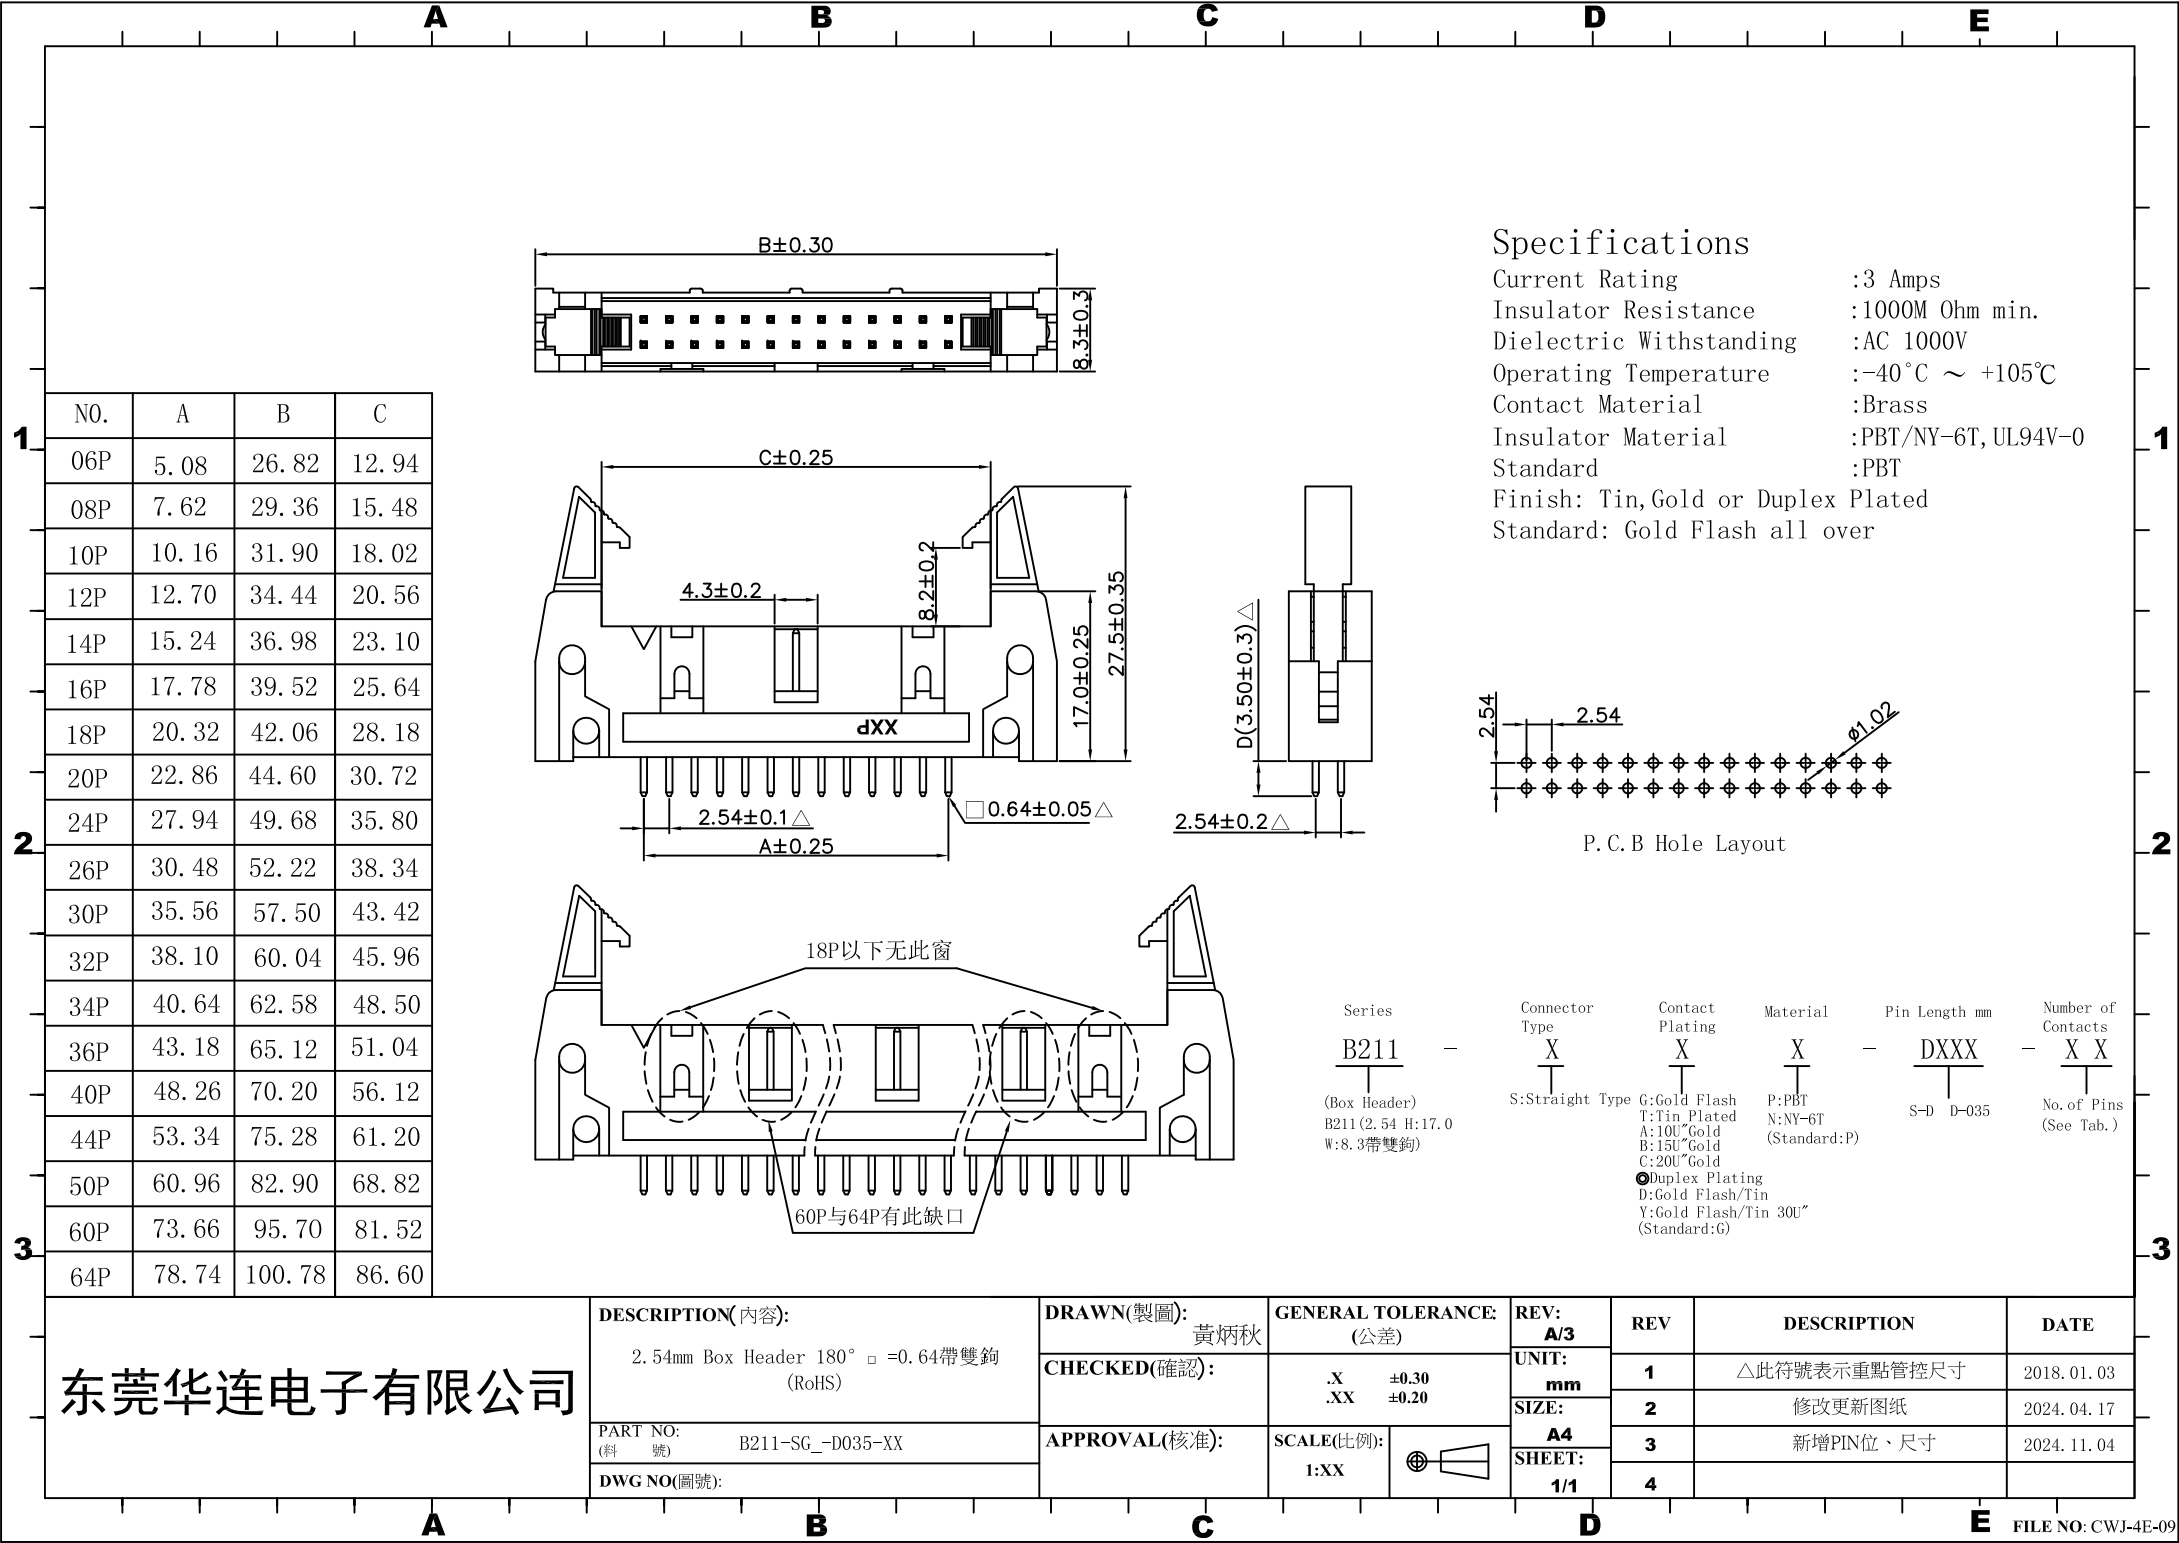

1

2

3

1

2

3

N0.	A	B	C
06P	5.08	26.82	12.94
08P	7.62	29.36	15.48
10P	10.16	31.90	18.02
12P	12.70	34.44	20.56
14P	15.24	36.98	23.10
16P	17.78	39.52	25.64
18P	20.32	42.06	28.18
20P	22.86	44.60	30.72
24P	27.94	49.68	35.80
26P	30.48	52.22	38.34
30P	35.56	57.50	43.42
32P	38.10	60.04	45.96
34P	40.64	62.58	48.50
36P	43.18	65.12	51.04
40P	48.26	70.20	56.12
44P	53.34	75.28	61.20
50P	60.96	82.90	68.82
60P	73.66	95.70	81.52
64P	78.74	100.78	86.60

Specifications

Current Rating :3 Amps

Insulator Resistance :1000M Ohm min.

Dielectric Withstanding :AC 1000V

Operating Temperature : -40°C ~ +105°C



Contact Material :Brass

Insulator Material :PBT/NY-6T, UL94V-0

Standard :PBT

Finish: Tin,Gold or Duplex Plated

Standard: Gold Flash all over

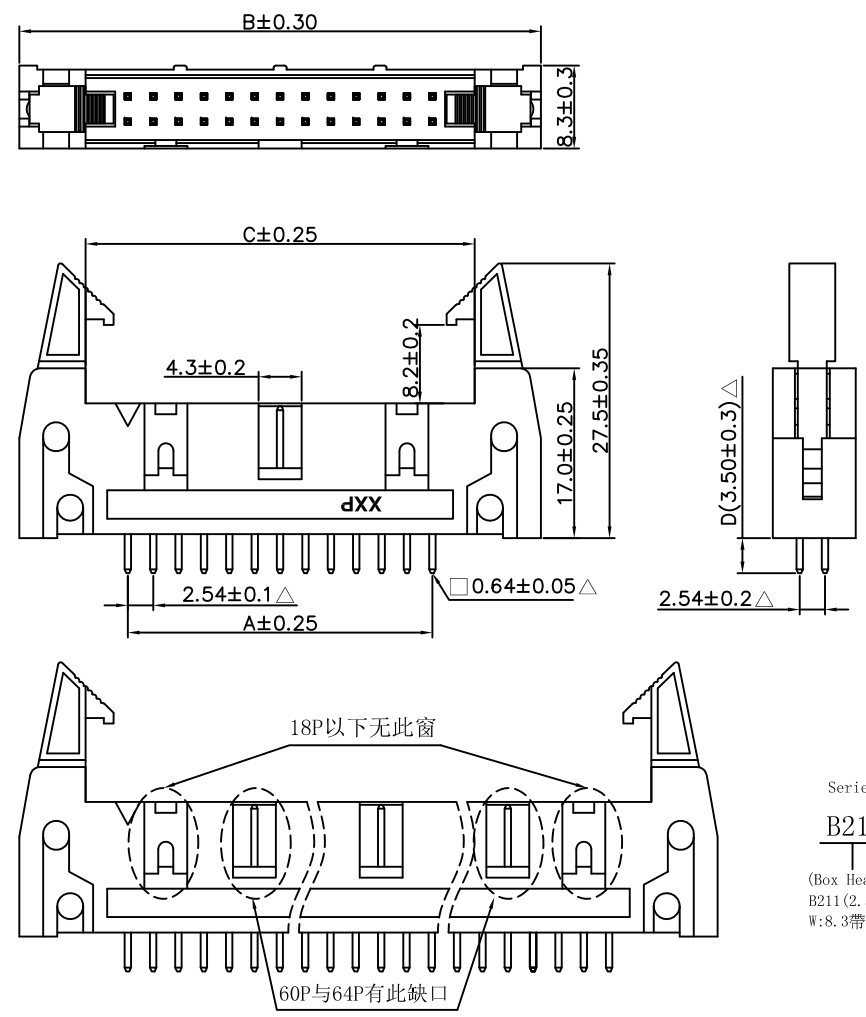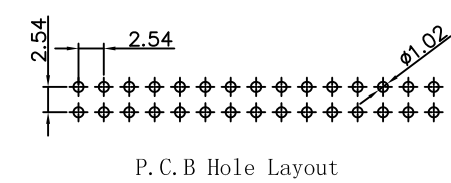

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
B211	X	X	X	DXXX	XX
(Box Header) B211 (2.54 H:17.0 W:8.3帶雙鉤)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U" Gold B: 15U" Gold C: 20U" Gold ● Duplex Plating D: Gold Flash/Tin Y: Gold Flash/Tin 30U" (Standard: G)	P: PBT N: NY-6T (Standard: P)	S-D D-035	No. of Pins (See Tab.)

东莞华连电子有限公司

DESCRIPTION(内容):	DRAWN(製圖):	GENERAL TOLERANCE:	REV:	REV	DESCRIPTION	DATE
2.54mm Box Header 180° □ =0.64帶雙鉤 (RoHS)	黃炳秋	(公差)	A/3			
PART NO: (料號) B211-SG_-D035-XX	CHECKED(確認):	.X ±0.30 .XX ±0.20	UNIT: mm	1	△此符號表示重點管控尺寸	2018.01.03
DWG NO(圖號):	APPROVAL(核准):	SCALE(比例): 1:XX	SIZE: A4	2	修改更新图纸	2024.04.17
			SHEET: 1/1	3	新增PIN位、尺寸	2024.11.04
				4		