


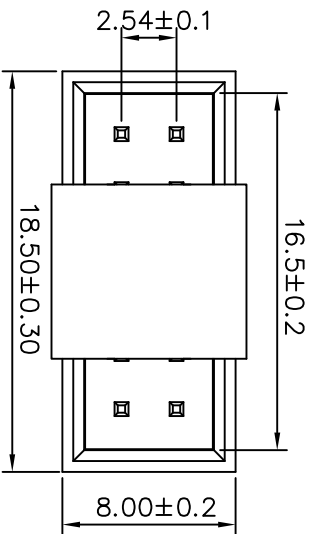
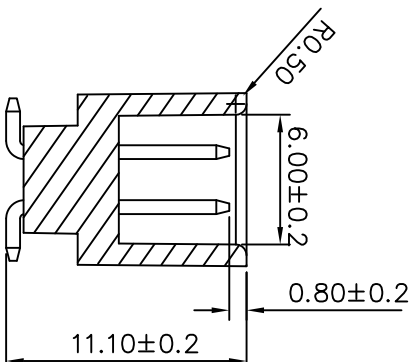


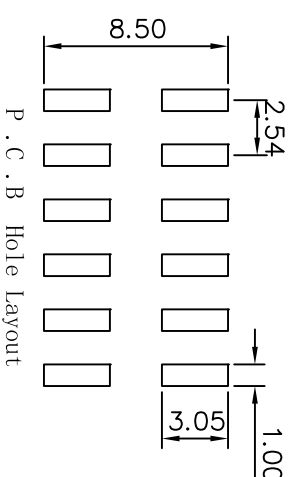

SEC A-A

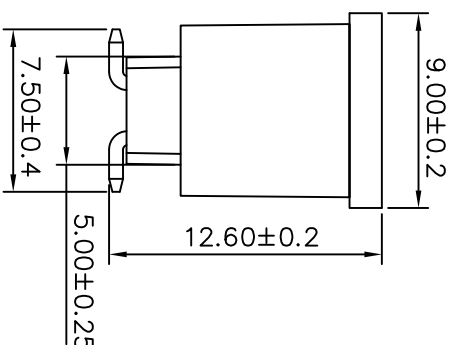

Specifications
Current Rating : 3A AC, DC
Voltage rating : 250V AC, DC
Temperature range : -40° C ~ +105° C
Contact resistance : 10mΩ Max.
Insulation resistance : 1000MΩ Min.
Withstanding voltage : 1000VAC/minute
Housing Mateial : LCP, UL94V-0, Black
Pin Material : Brass/Gold Flash

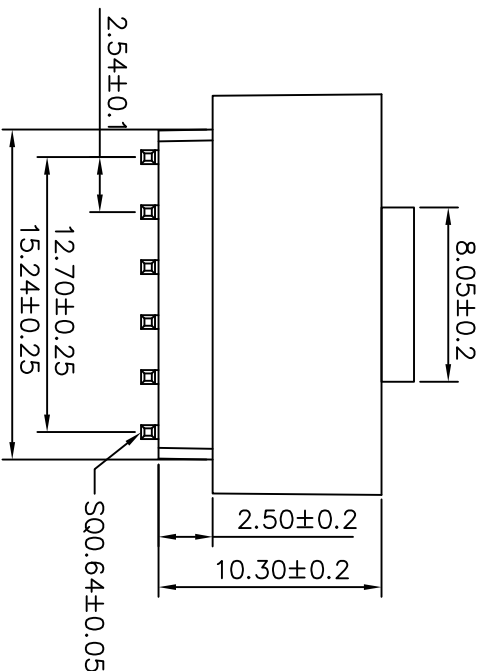

P . C . B Hole Layout

东莞华连电子有限公司

DESCRIPTION(内容):		DRAWN(製圖):		GENERAL TOLERANCE:		REV:	REV	DESCRIPTION	DATE
2. 54mm Pitch Box Header Connector		Bingxin Huang		(公差)		A/1	1		2021.04.22
REEL+CAP (RoHS)		CHECKED(確認):		X : +0.25		UNIT:	2		
PART NO: B254-M66C-D075-2X06-RC		APPROVAL(核准):		XX : +0.20		SIZE:	3		
(料號)		SCALE(比例):		XXX : ±0.15		A4	4		
DWG NO(圖號):		1:XX		SHEET:		1/1			