
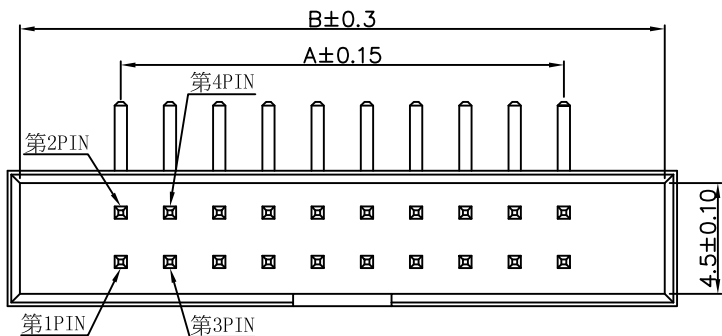



P. C. B Hole Layout

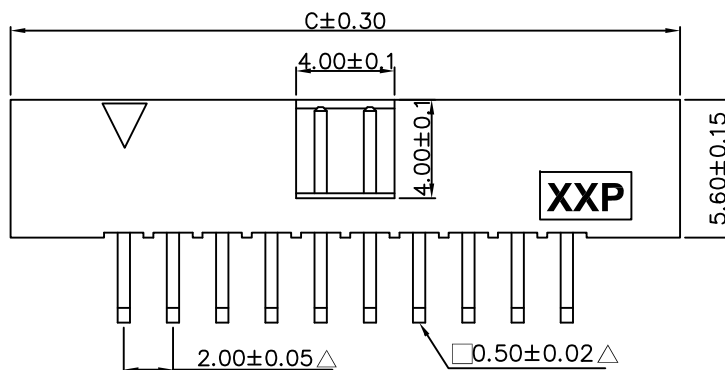

Specifications

Current Rating : 2 Amp
Insulator Resistance : 3000 Megohms Min.
Dielectric Withstanding : AC 500V
Operating Temperature : -40°C ~ +105°C
Contact Material : Copper Alloy
Insulator Material : Polyester, UL 94V-0
Standard : PBT/NY-6T/LCP
Finish: Tin, Gold or Duplex Plated
Standard: Gold Flash all over
Note:
Duplex Plating: Gold Plated on contact area,
Tin on solder area

PIN NUMBER	A(mm)	B(mm)	C(mm)
10PIN	8.00	16.20	17.20
12PIN	10.00	18.20	19.20
14PIN	12.00	20.20	21.20
16PIN	14.00	22.20	23.20
18PIN	16.00	24.20	25.20
20PIN	18.00	26.20	27.20
24PIN	22.00	30.20	31.20
26PIN	24.00	32.20	33.20
30PIN	28.00	36.20	37.20
34PIN	32.00	40.20	41.20
40PIN	38.00	46.20	47.20
44PIN	42.00	50.20	51.20
50PIN	48.00	56.20	57.20
68PIN	66.00	74.20	75.20

Series B410 - Connector Type X - Contact Plating X - Material X - Pin Length mm DXXX - Number of Contacts XX

(Box Header) B410 (2.00 H: 5.6 W: 5.5)
R: Right Angle Type
T: Tin Plated
A: 10U" Gold
B: 15U" Gold
C: 20U" Gold
◎ Duplex Plating
D: Gold Flash/Tin
Y: Gold Flash/Tin 30U"
(Standard: G)

P: PBT
N: Nylon-6T
C: LCP
(Standard: P)

R-D D-028
(Standard: R-D028)

(10 TO 68 Contacts)

东莞华连电子有限公司

DESCRIPTION(内容):	DRAWN(製圖):		GENERAL TOLERANCE:		REV:	REV	DESCRIPTION	DATE
	CHECKED(確認):		.X .XX .XXX		UNIT:			
	APPROVAL(核准):		.XXXX .X° .XX°		mm			
	SCALE(比例):		1:XX		SIZE:			
	DWG NO(圖號):		1:XX		A4			
2.0mm Box Header H:5.6 W:5.5 90° □ =0.50 (RoHS)		Bingjin Huang		(公差)		A1		
PART NO: (料號) B410-R3G_-D028-XX						1	△ 此符號表示重點管控尺寸	2019. 12. 13
DWG NO(圖號):						2		
						3		
						4		