



P.C.B Hole Layout

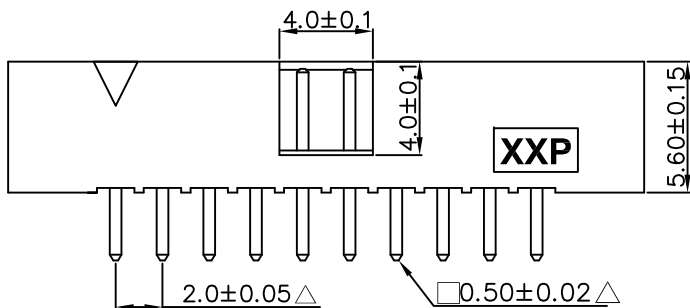

Series B410 (Box Header) B410(2.00 H:5.6 W:5.5)

Connector Type X S: Straight Type

Contact Plating X G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ©Duplex Plating D: Gold Flash/Tin Y: Gold Flash/Tin 30U" (Standard: G)

Material X P: PBT N: NY-6T C: LCP (Standard: P)

Pin Length mm - DXXX S-D D-029 (Standard: S-D029)

Number of Contacts X X (10 TO 68 Contacts)

Specifications

Current Rating : 2 Amp
Insulator Resistance : 3000 Megohms Min.
Dielectric Withstanding : AC 500V
Operating Temperature : -40°C ~ +105°C
Insulator Material : PBT/NY-6T/LCP, UL94V-0
Standard : P. B. T
Contact Material : Copper Alloy
Finish: Tin, Gold or Duplex Plated
Standard: Gold Flash all over
Note:
Duplex Plating: Gold Plated on contact area,
Tin on solder area

PIN NUMBER	A(mm)	B(mm)	C(mm)
10PIN	8.00	16.20	17.20
12PIN	10.00	18.20	19.20
14PIN	12.00	20.20	21.20
16PIN	14.00	22.20	23.20
18PIN	16.00	24.20	25.20
20PIN	18.00	26.20	27.20
24PIN	22.00	30.20	31.20
26PIN	24.00	32.20	33.20
30PIN	28.00	36.20	37.20
34PIN	32.00	40.20	41.20
40PIN	38.00	46.20	47.20
44PIN	42.00	50.20	51.20
50PIN	48.00	56.20	57.20
68PIN	66.00	74.20	75.20

东莞华连电子有限公司

DESCRIPTION(内容):

2.0mm Box Header H:5.6 W:5.5 180° □=0.50 (RoHS)

PART NO: (料 號) B410-SG_-D029-XX

DWG NO(圖號):

DRAWN(製圖): 黃炳秋

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE: (公差)

.X .XXX
.XX .X °
.XXX .XX °

SCALE(比例):

1:XX



REV: A/1

UNIT: mm

SIZE: A4

SHEET: 1/1

REV

1

2

3

4

DESCRIPTION

△此符號表示重點管控尺寸

DATE

2023. 11. 03