
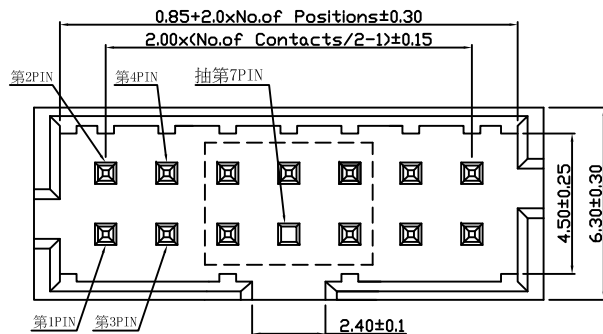
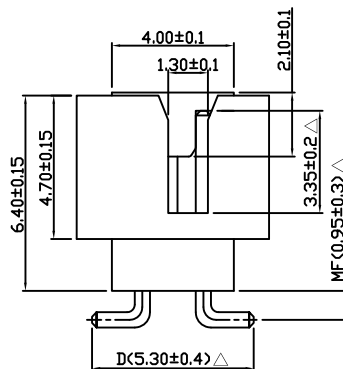


P.C.B Hole Layout

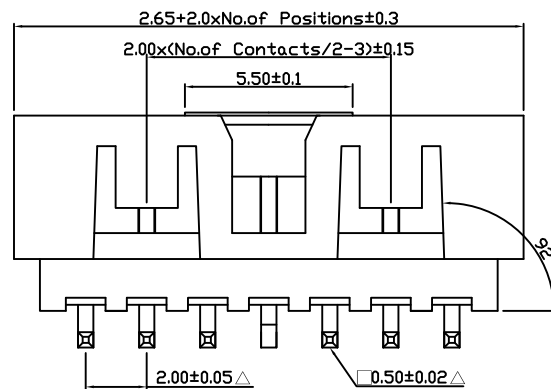

ED Specifications

Current Rating :2 Amps
Insulator Resistance :3000 Megohms Min.
Dielectric Withstanding :AC 500 V
Operating Temperature : -40℃ ~ +105℃
Soldering Temperature :260℃ for 3~5s Max.
Contact Material :Copper Alloy
Insulator Material :Nylon-6T/LCP, UL94V-0
Finish: Tin,Gold or Duplex Plated
Standard: Gold Flash all over
Note:
Duplex Plating: Gold Plated on contact area,
Tin on solder area

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts	Other	Other
B416	X	X	X	DXXX	X X	N07	RC
(Box Header)	M: SMT Type	G: Gold Flash	C: LCP	S-D D-053	(Contacts)	N07: 抽	R: REEL
B416 (PH2.0	MF: 0.95mm	T: Tin Plated	N: Nylon-6T	(Standard: S-D053)	(10 TO 68)	第7Pin	C: CAP
H: 6.4 W: 6.3)	...	A: 10U"Gold	(Standard: N)				
		B: 15U"Gold					
		C: 20U"Gold					
		E: 30U"Gold					
		©Duplex Plating					
		D: Gold Flash/Tin					
		(Standard: G)					

东莞华连电子有限公司

DESCRIPTION(内容):

2.0mm Box Header H:6.4 SMT
抽第7Pin 镀金10u" REEL+CAP (RoHS)

PART NO:
(料 號) B416-MFA_-D053-XX-N07-RC

DWG NO(圖號):

DRAWN(製圖):

黄炳秋

CHECKED(確認):

APPROVAL(核准):


GENERAL TOLERANCE:

(公差)

.X .XXX
.XX .X °
.XXX .XX°

SCALE(比例):

1:XX



REV:

A/1

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

1

2

3

4

DESCRIPTION

△此符號表示重點管控尺寸

DATE

2018. 09. 20