
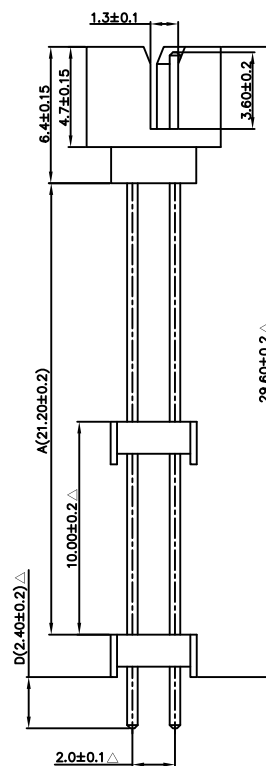


P.C.B Hole Layout

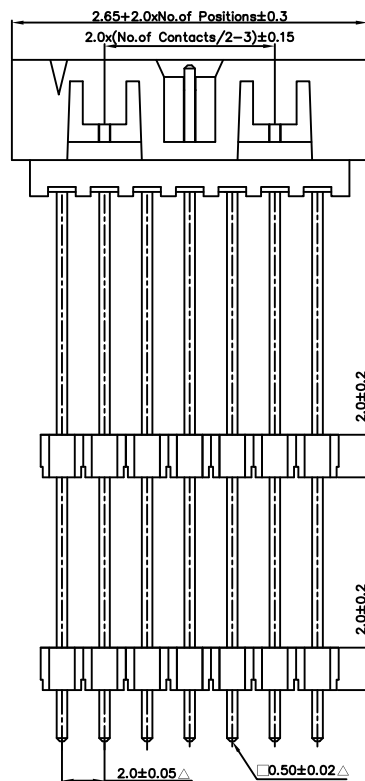


Specifications

Current Rating	:2 Amps
Insulator Resistance	:3000 Megohms Min.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Copper Alloy
Insulator Material	:PBT/NL-6T/LCP, UL94V-0
Standard	:P. B. T
Finish: Tin, Gold or Duplex Plated	
Standard: Gold Flash all over	

Note:

Duplex Plating: Gold Plated on contact area,
Tin on solder area

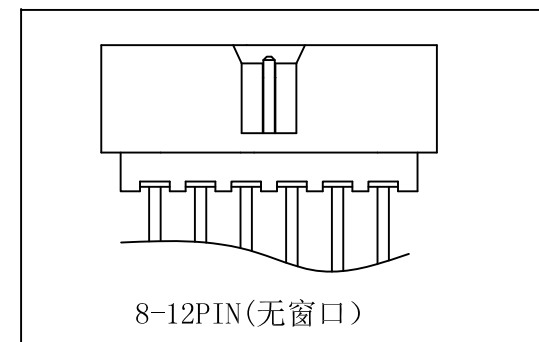

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts	Other
<u>B416</u>	<u>X</u>	<u>X</u>	<u>X</u>	<u>DXXX/XA</u>	<u>X X</u>	<u>P2</u>
(Box Header) B416(2.0 H:6.4 W:6.3)	S:Stright Type ⋮	G:Gold Flash T:Tin Plated A:100"Gold B:150"Gold C:200"Gold E:30"Gold Ⓢ:Duplex Plating D:Gold Flash/Tin (Standard:G)	P:PBT C:LCP N:Nylon-6T (Standard:P)	S-D D-024 (212)	(Contacts) (08 TO 50)	P2:套2层 排针塑胶

东莞华连电子有限公司

DESCRIPTION(内容):

2.0mm Box Header H:6.4 180° (RoHS)

PART NO: B416-SG_-D024/212-XX-P2
(料 號)

DWG NO(圖號):

DRAWN(製圖):

17. 茜炳秋

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:

(公差)

$.X$	$.XXXX$
$.XX$	$.X^\circ$
$.XXX$	$.XX^\circ$

SCALE(比例):
1:XX



REV:	
------	--

A/1

UNIT:
mm

SIZE:

A4

SHEET:

REV

REV

1

2

[illegible][illegible]

DESCRIPTION

△此符號表示重點管控尺寸

DATE _____

2023. 07. 31
