
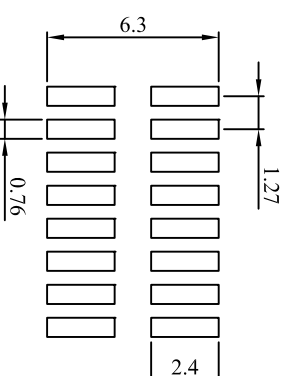



Specifications	
Current Rating	: 1 Amp
Insulator Resistance	: 1000 Megohms Min.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40°C ~ +105°C
Contact Material	: Copper Alloy
Insulator Material	: NY-6T/LCP, UL94V-0
Standard	: NY-6T
Finish	: Gold Plated
Standard	: Gold Flash all over

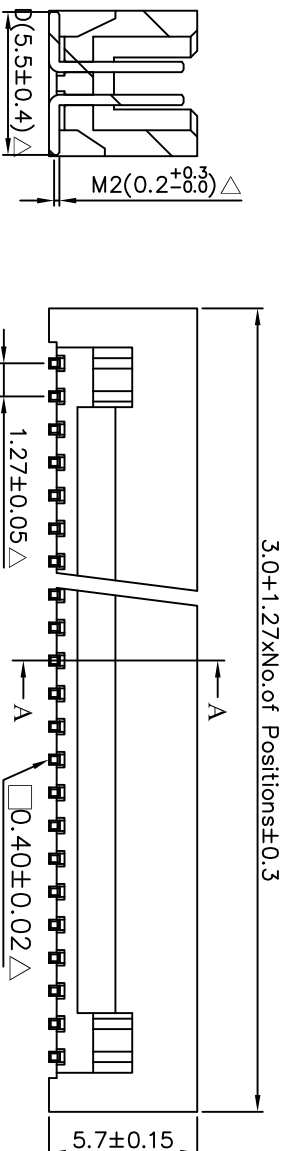

SECTION A-A

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
B610	-	X	X	DXXX	-
(Box Header)					
B610 (1.27	M: SMT Type	G: Gold Flash	C: LCP	M-D D-055	(10 TO 100
H: 5.7 W: 5.6)	M2: 0.2mm	T: Tin Plated	N: NY-6T		Contacts)
	⋮	D: Gold Flash/Tin	(Standard: N)		
		ED: 30" Gold / Tin			
		Y: Gold 30U"/Tin			
		EW: 3U" Gold/Matte Tin			
		KW: Gold 15U"/Matte Tin			
		(Standard: G)			

DESCRIPTION(内容):		DRAWN(製圖):		GENERAL TOLERANCE:		REV:	REV	DESCRIPTION	DATE
1.27mm Box Header H:5.7W:5.6 SMT □=0.40 (RoHS)		CHECKED(確認):		SCALE(比例):		A/2	1	△此符號表示重點管控尺寸	2013.01.25
PART NO: B610-M2G-D055-XX		APPROVAL(核准):		SHEET:		mm	2	更新圖面修改尺寸公差	2018.01.04
DWG NO(圖號):		Huang Bingqia		1:XX		A4	3		
						1/1	4		

东莞华连电子有限公司

A

B

C

D

E

FILE NO: CWJ-4E-09