


Specifications

Current Rating	: 1 Amp
Insulator Resistance	: 1000 Megohms Min.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40°C ~ +105°C
Contact Material	: Copper Alloy
Insulator Material	: NY-6T/LCP, UL94V-0
Standard Finish	: NY-6T
Standard	: Gold Plated
	: Gold Flash all over

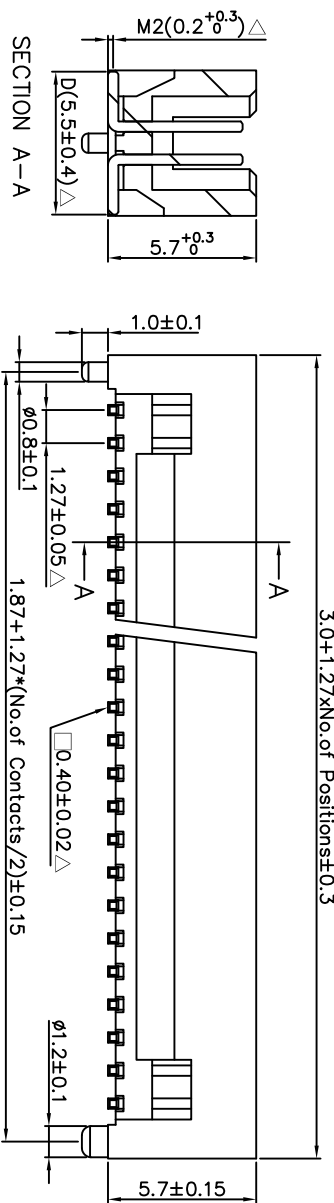

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts	Other
B610	-	X	X	-	X X	- P
(Box Header)						
B610(1. 27						
H: 5. 7 W: 5. 6)						
	M: SMT Type		G: GOLD FLASH	N: NY-6T		
	M2: 0. 2mm		T: TIN PLATED	M-D D-055	(10 TO 100	P: PEG
	⋮		A: 10U"Gold		Contacts)	
			B: 15U"Gold			
			C: 20U"Gold			
			D: GOLD FLASH/TIN			
			ED: 3U" GOLD /TIN			
			Y: GOLD 30U" /TIN			
			KW: GOLD 15U" /MATTE TIN			
			IW: Gold 30U" /Matte Tin			
			(STANDARD: G)			

DESCRIPTION(内容):	DRAWN(製圖):	GENERAL TOLERANCE:	REV:	REV	DESCRIPTION	DATE
1.27mm Box Header H:5.7 W:5.6 SMT □=0.40	黄炳秋	(公差)	A/5	2	物料號: CHEB1270M0XX	2007.04.28
有大小定位柱 (RoHS)	CHECKED(確認):	.X .XXX .X° .XXX .X°	UNIT: mm	3	舊料號: B610-XXM2GN-D055-P	2007.04.28
PART NO: B610-M2G -D055-XX-P	APPROVAL(核准):	SCALE(比例):	A4	4	圖面更新	2012.04.10
(料號) DWG NO(圖號):	Huang Bingqiu	1:XX	1/1	5	圖面更新修改尺寸公差	2018.01.04

东莞华连电子有限公司