
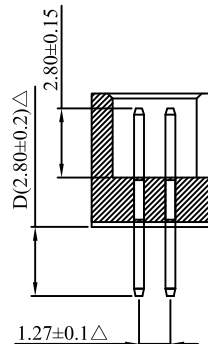


P.C.Board Layout

Specifications

Current Rating	:1 Amp
Insulator Resistance	:1000 Megohms Min.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:−40℃ ~ +105℃
Contact Material	:Copper Alloy
Insulator Material	:PBT/NY6T/NY9T/LCP, UL94V-0
Standard	:NY6T
Finish	:Gold Plated
Standard	:Gold Flash all over

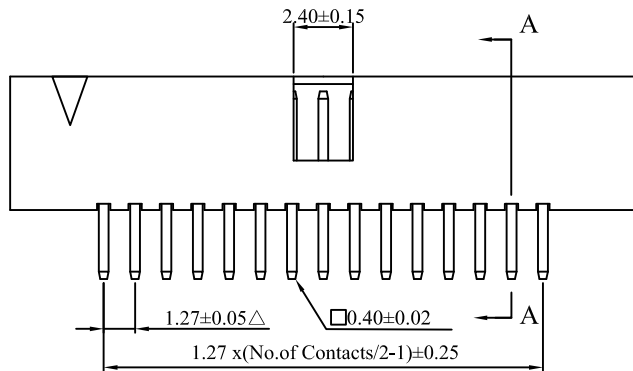

SEC:A-A

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
B613	X	X	X	DXXX	XX
(Box Header)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ©Duplex Plating D: Gold Flash/Tin Y: Gold Flash/Tin 30U" (Standard:G)	P: PBT N: NY-6T N1: NY-9T C: LCP (Standard: N)	S-D D-028	(10 TO 100 Contacts)

东莞华连电子有限公司

DESCRIPTION(内容):

1.27mm Box Header H:5.4 w:5.1 180° □=0.40 (RoHS)

PART NO:
(料 號) B613-SG_-D028-XX

DWG NO(圖號):

DRAWN(製圖):

黄炳秋

CHECKED(確認):

Huang Bingqiu

APPROVAL(核准):

Huang Bingqiu

GENERAL TOLERANCE:

(公差)

.X .XXXX
.XX .X °
.XXX .XX °

SCALE(比例):

1:XX



REV:

A/1

UNIT:

mm

SIZE:

A4

SHEET:

X/X

REV

1

2

3

4

DESCRIPTION

△此符号表示重點管控尺寸

DATE

2023.09.28