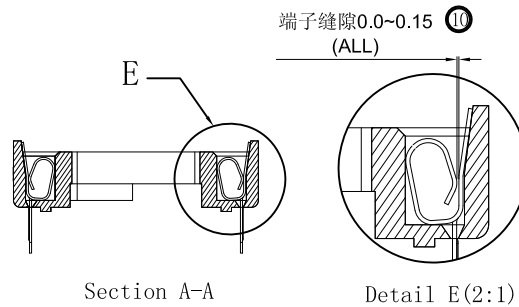
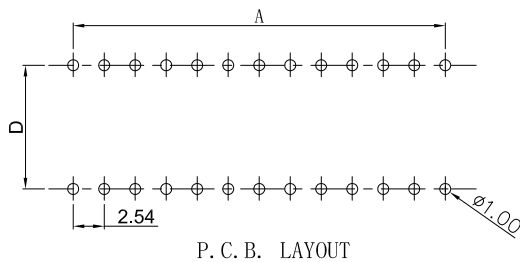
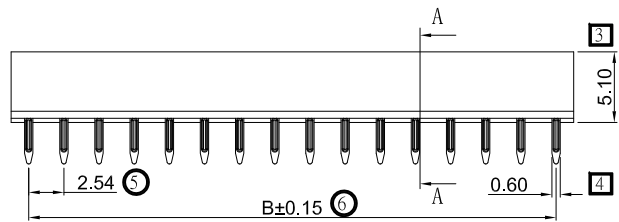
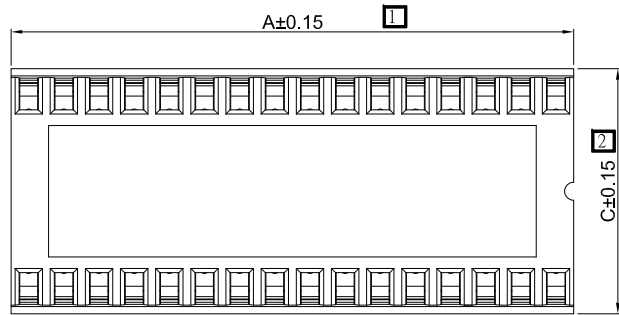


Order Information
CIS2540X0XX-CF438
No. of Positions
Dim "D"
3:D=7.62MM(窄体)
6:D=15.24MM(宽体)

- MATERIAL:
HOUSING: 30% Glass Filled PBT, UL94V-0, BLACK.
CONTACT: PHOS BRONZE
- FINISH: Tin Plated over Nickel.
SOLDERABILITY :95% COVERAGE MIN.;
WORKING CONDITION:230°±5°C MAX;
- MECHANICAL SPECS:
DURABILITY: 50 CYCLES MIN.
INSERTION FORCE:300g MAX.
WITHDRAWAL FORCE: 20g MIN.
CONTACT RETENTION: 500g MIN.
ACCEPTS: 0.20-0.30 [.008-.012] LEADS
- ELECTRICAL SPECS:
VOLTAGE RATING: 250V AC,DC
CONTACT RESISTANCE: 20m OHMS MAX.
CURRENT RATING:1A AC,DC
INSULATION RESISTANCE: 1000M OHMS MIN.
DIELECTRIC WITHSTANDING VOLTAGE: DC500V MIN.
OPERATING TEMPERATURE: -40°C TO +105°C
Resistance to Wave Soldering Heat: 245°C±5°C,3~5sec

position	A	B	C	D
08	10.16	7.62	10.16	7.62
14	17.78	15.24	10.16	7.62
16	20.32	17.78	10.16	7.62
18	22.86	20.32	10.16	7.62
20	25.40	22.86	10.16	7.62
22	27.94	25.40	10.16	7.62
24	30.48	27.94	10.16	7.62
24	30.48	27.94	17.78	15.24
28	35.56	33.02	10.16	7.62
28	35.56	33.02	17.78	15.24
32	40.54	38.10	17.78	15.24
40	50.80	48.26	17.78	15.24
42	53.21	50.80	17.78	15.24
48	60.80	58.42	17.78	15.24

东莞华连电子有限公司

DESCRIPTION(内容):
2.54mm IC Socket (RoHS)

PART NO:
(料 號) CIS2540X0XX-CF438

DWG NO(圖號):

DRAWN(製圖):
Bingqiu Huang

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差)

.X ±0.20
.XX ±0.15 X. ° ±2°
.XXX ±0.10 .X° ±1°
SCALE(比例):
1:XX

REV:
A/4

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV

1

2

3

4

DESCRIPTION

修正玻纤含量30% G. F.

新增22PIN

新增缝隙尺寸及尺寸管控序号

DATE

2019. 12. 23

2020. 08. 21

2022. 09. 21

2023. 03. 26