
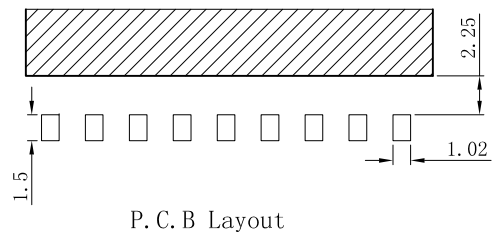

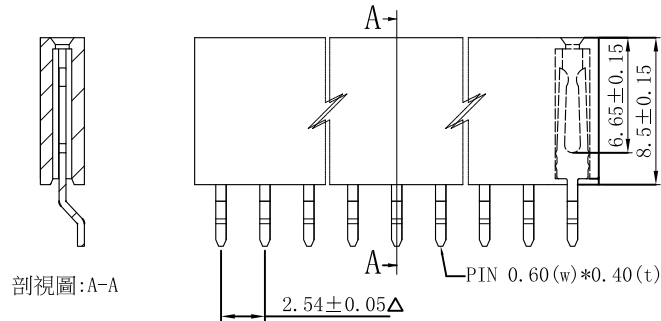


Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	:-40°C ~ +105°C
Soldering Temperature	:260° C for 3~5sec Max.
Contact Material	:Brass
Insulator Material	:Polyester, UL 94V-0
Finish: Tin, Gold or Duplex Plated	
Standard: Gold Flash all over	

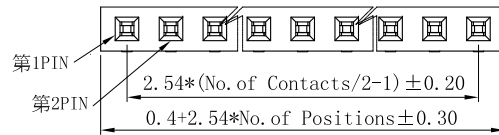

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F101	X	X	X	DXXX	-XX - WH
(Female Header Single Row) F101 (2.54 H:8.5)	K: "K" Type	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ©Duplex Plating D: Gold Flash/Tin (Standard: G)	N: Nylon-6T C: LCP (Standard: N)	K-D D036	(04 TO 80 Contacts) (White)

东莞华连电子有限公司

DESCRIPTION(内容):
2.54mm Female Header H:8.5 W:2.40
"K" TYPE, (RoHS)

PART NO:
(料 號) F101-KG_-D036-XX-WH

DWG NO(圖號):

DRAWN(製圖):
黃玉美

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差)

.X .XXXX
.XX .X °
.XXX .XX °

SCALE(比例):
1:1

REV:
A/2

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV
1
2
3
4

DESCRIPTION
△此符號表示重點管控尺寸

DATE
2007.10.24