

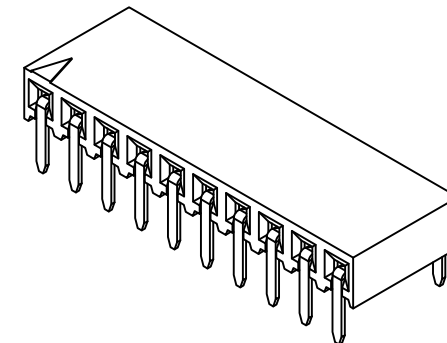


P. C. B Layout



Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	:-40℃ ~ +105℃
Contact Material	:Phosphor Bronze
Insulator Material	:Polyester, UL 94V-0
Standard	:Nylon-6T
Finish	:Tin, Gold or Duplex Plated
Standard	:Gold Flash all over

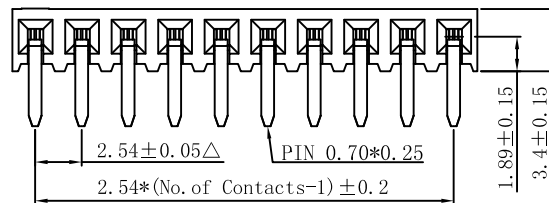

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F108	X	X	X	DXXX	-XX
(Female Header Single Row) F108 (2.54 H:8.1 W:3.4)	R:Right Angle	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold E:3U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	P:PBT C:LCP N:Nylon-6T N1:Nylon-9T (Standard:N)	R-D D030 (Standard:R-D030)	(02 TO 40 Contacts)

东莞华连电子有限公司

DESCRIPTION(内容):

2.54mm Female Header H:8.1 W:3.4
单排侧插 (RoHS)

PART NO:
(料 號)

F108-RG_-D030-XX

DWG NO(圖號):

DRAWN(製圖):

黄炳秋

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:

(公差)

.X
.XX
.XXX

.XXXX
.X°
.XX°

SCALE(比例):

1:XX



REV:

A/1

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

1

2

3

4

DESCRIPTION

△此符号表示重點管控尺寸

DATE

2019. 11. 13