



Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000M ohms Min.
Contact Resistance	:20m ohms Max.
Dielectric Withstanding	:550V AC/Minute
Operating Temperature	: -55°C ~ +105°C
Contact Material	:Copper Alloy
Insulator Material	:Polyester, UL94V-0
Standard	:P.B.T / NY-6T
Finish	:Tin, Gold or Duplex Plated
Standard	:Gold Flash all over

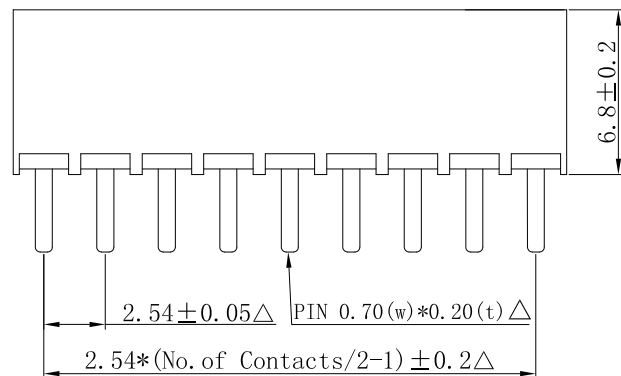

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F117	X	X	X	DXXX	-XX
(Female Header Dual Row) F117 (PH2.54) H:6.8 W:3.5)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U" Gold B: 15U" Gold C: 20U" Gold © Duplex Plating D: Gold Flash/Tin F: Gold Flash/Tin 30U" (Standard: G)	P: PBT N: NY-6T (Standard: P)	S-D D032 (Standard: S-D032)	(03 TO 40 Contacts)

东莞华连电子有限公司

DESCRIPTION(内容): 2.54mm Female Header H:6.8 W:3.5 180° (RoHS)
PART NO: (料 號) F117-SG_-D032-XX
DWG NO(圖號):

DRAWN(製圖): 黄炳秋
CHECKED(確認):
APPROVAL(核准):

GENERAL TOLERANCE: (公差)
SCALE(比例): 1:XX

REV: A/1
UNIT: mm
SIZE: A4
SHEET: X/X

REV	DESCRIPTION	DATE
1	△此符號表示重點管控尺寸	2017.02.23
2		
3		
4		