
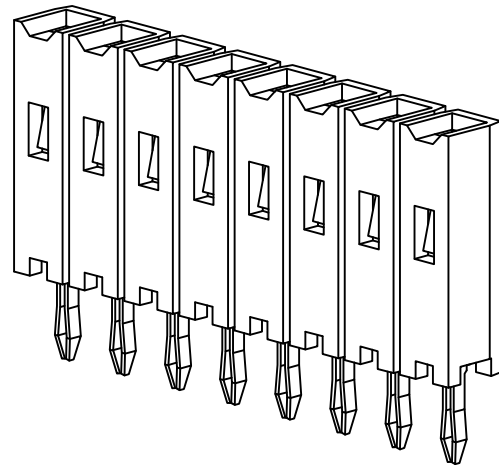
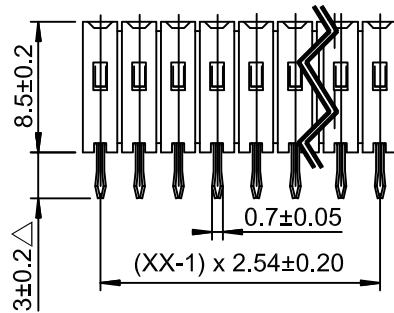



Recommended PCB layout:

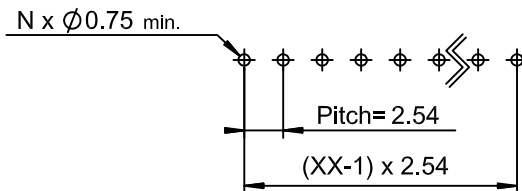

Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Phosphor Bronze
Insulator Material	:Polyester, UL 94V-0
Standard	:P. B. T/LCP/NL-6T/NL-9T
Finish: Tin, Gold or Duplex Plated	
Standard: Gold Flash all over	

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F195	X	X	X	DXXX	-XX
(Female Header Single Row) F195(2.54 H:5.0 With stand off)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ⊙ Duplex Plating D: Gold Flash/Tin ED: 3U"Gold/Tin (Standard: G)	P: PBT C: LCP N: Nylon-6T NI: Nylon-9T (Standard: P)	S-D D030 (Standard: S-D030)	(02 TO 40 Contacts)

东莞华连电子有限公司

DESCRIPTION(内容):
2.54mm Female Header H:8.5 W:2.54 180°
(RoHS)

PART NO:
(料 號) F195-S_ _-D030-XX

DWG NO(圖號):

DRAWN(製圖):
邓文广


CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差)

.X .XXXX
.XX .X °
.XXX .XX °

SCALE(比例):
1:XX



REV:
A/1

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV

1

2

3

4

DESCRIPTION

△此符號表示重點管控尺寸

DATE

2020.09.02