
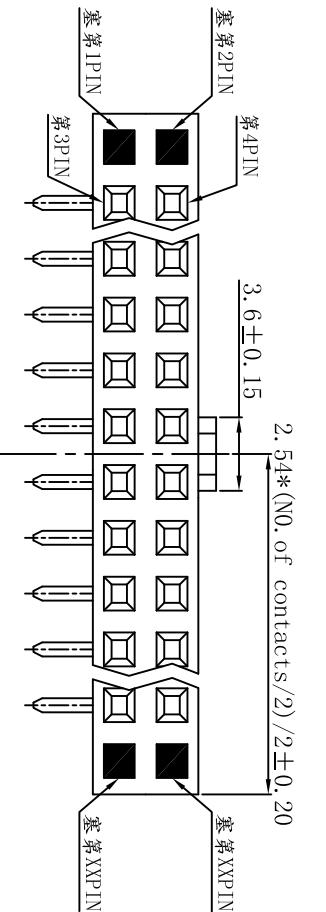
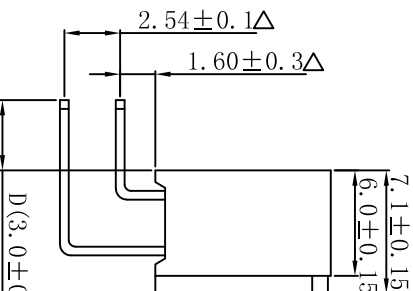


P. C. B. Hole Layout

如圖所示：第1、2、和最後兩P塞PIN, 不插針

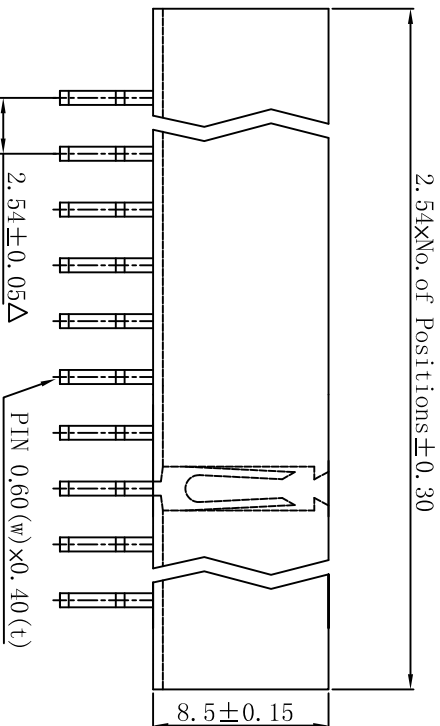

Series  
F201  
Female Header  
Dual Row  
F201 (2.54 H:8.5)

Connector  
Type  
X  
Right  
Angle

Contact  
Plating  
X  
G:Gold Flash  
T: Tin Plated  
A:100"Gold  
B:150"Gold  
C:200"Gold  
Duplex Plating  
D:Gold Flash/Tin  
F:Gold Flash/Tin  
(Standard:G)

Material  
X  
P:PPt  
N:Nylon-6T  
(Standard:P)  
Pin Length mm  
DXXX  
R-D  
D030  
(04 TO 80  
Contacts)  
Number of  
Contacts  
-XX  
Other  
-BM  
BM:防呆有  
倒角，塞  
第1,2和最後  
兩PIN及  
不插針

©Duplex Plating  
D:Gold Flash/Tin  
F:Gold Flash/Tin  
(Standard:G)

DESCRIPTION(內容):

2.54MM Female Header H:8.5 W:7.1 90°  
防呆有倒角，第1、2最後兩P塞PIN, 不插針(環保材料)

DRAWN(製圖):

劉建平

CHECKED(確認):

防呆有倒角，第1、2最後兩P塞PIN, 不插針(環保材料)

GENERAL TOLERANCE:

(公差)

.X .XXX  
.XX .XXX  
.XXX .XXX

REV:

A/4

UNIT:

mm

REV

1

DESCRIPTION

△此符號表示重點管控尺寸

DATE

2005.08.13

2006.03.01

2006.06.17

2007.03.17

东莞华连电子有限公司

PART NO:

F201-RG\_-D030-XX-BM

(料號)

DWG NO(圖號):

SCALE(比例):

1:XX

SHEET:

1/1

4

防呆寬度有變動

A

B

C

D

E

FILE NO: CWJ-4E-09