
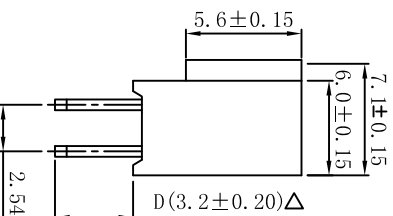


P.C.B. Hole Layout

## Specifications

|                                    |                                                   |
|------------------------------------|---------------------------------------------------|
| Current Rating                     | : 3 Amps                                          |
| Insulator Resistance               | : 5000 Megohms Min.                               |
| Dielectric Withstanding            | : AC 1000 V                                       |
| Operating Temperature              | : $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$ |
| Contact Material                   | : Copper Alloy                                    |
| Insulator Material                 | : Polyester, UL 94V-0                             |
| Standard                           | : P.B.T/LCP/NL-6T                                 |
| Finish: Tin, Gold or Duplex Plated |                                                   |
| Standard: Gold Flash all over      |                                                   |

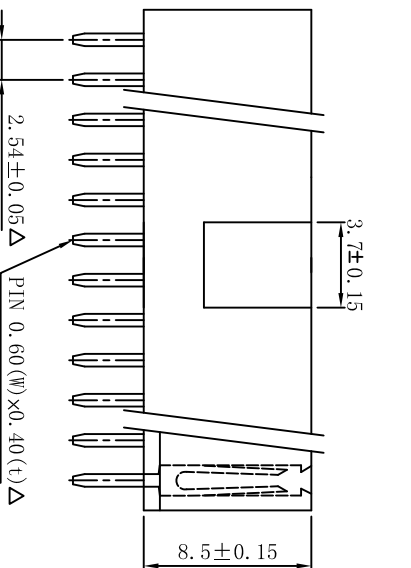

Series  
F201 -  
(Female Header  
Single series)  
F201 (2.54 H:8.5)

Connector  
Type  
X  
S: Straight Type

Contact  
Plating  
X

Material  
X

Pin Length mm  
DXXX

Number of  
Contacts  
-XX

Other  
-H

G: Gold Flash  
T: Tin Plated  
A: 100" Gold  
B: 150" Gold  
C: 200" Gold  
© Duplex Plating  
D: Gold Flash/Tin  
(Standard: G)

P: PBT  
C: LCP  
N: Nylon-6T  
(Standard: P)

S-D  
D032  
(04 TO 80  
Contacts)

H: 帶防呆無倒角

### DESCRIPTION(内容):

2.54mm Female Header 180 H:8.5 W:7.1  
帶防呆無倒角 鍍10U金 (RoHS)

### DRAWN(製圖):

CHECKED(確認):

SCALE(比例):

UNIT:

REV:

### DESCRIPTION

DATE

东莞华连电子有限公司

PART NO:

F201-SA\_-D032-XX-H

APPROVAL(核准):

SCALE(比例):

UNIT:

REV:

### DESCRIPTION

DATE

DWG NO(圖號): RDA190117-001

SCALE(比例):

UNIT:

REV:

### DESCRIPTION

DATE

A

B

C

D

E

FILE NO: CWJ-4E-09