

A



B

C

D

E

1

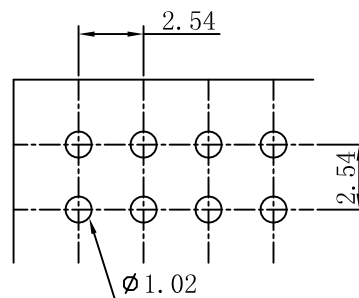
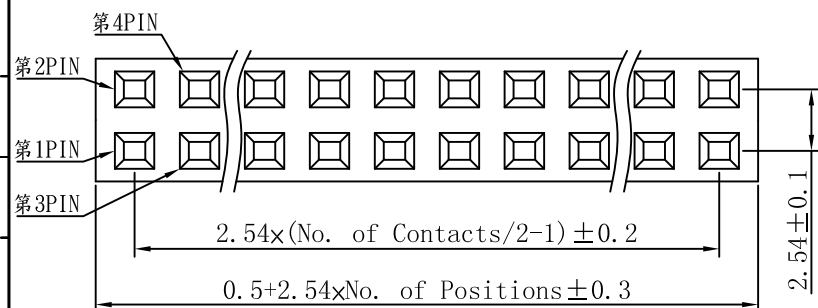


P. C. B. Hole Layout

Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Brass
Insulator Material	:Polyester, UL 94V-0
Standard	:P. B. T/LCP/NL-6T
Finish: Tin, Gold or Duplex Plated	
Standard: Gold Flash all over	

2

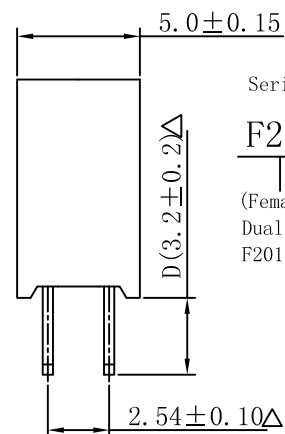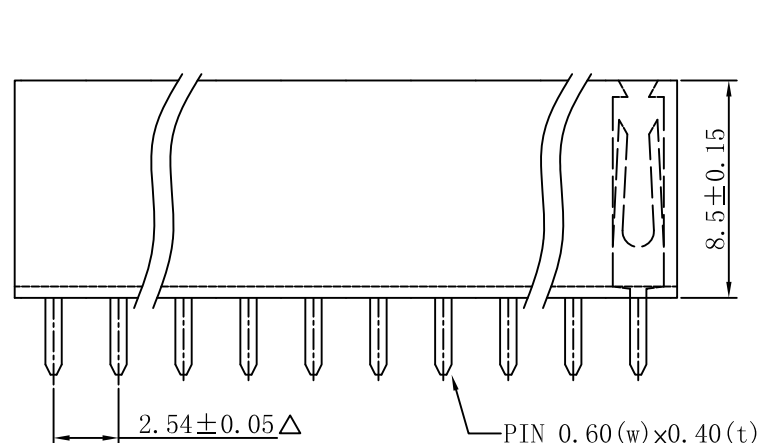

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F201	X	X	X	DXXX	-XX
(Female Header Dual Row) F201 (2.54 H:8.5 W:5.0)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U" Gold B: 15U" Gold C: 20U" Gold © Duplex Plating D: Gold Flash/Tin (Standard: G)	P: PBT C: LCP N: Nylon-6T (Standard: P)	S-D D032 (Standard: S-D032)	(04 TO 80 Contacts)

3

东莞华连电子有限公司

DESCRIPTION(内容):

2.54mm Female Header H:8.50 W:5.00 180°
(RoHS)PART NO:
(料 號)

F201-SG_-D032-XX

DWG NO(圖號):


DRAWN(製圖):

鄧文廣

CHECKED(確認):

.X .XXXX
.XX .X °
.XXX .XX °

APPROVAL(核准):

SCALE(比例):
1:XX

GENERAL TOLERANCE:

(公差)

REV:

A/1

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

1

2

3

4

DESCRIPTION

△ 此符號表示重點管控尺寸

DATE

2018.11.14

A

B

C

D

E