


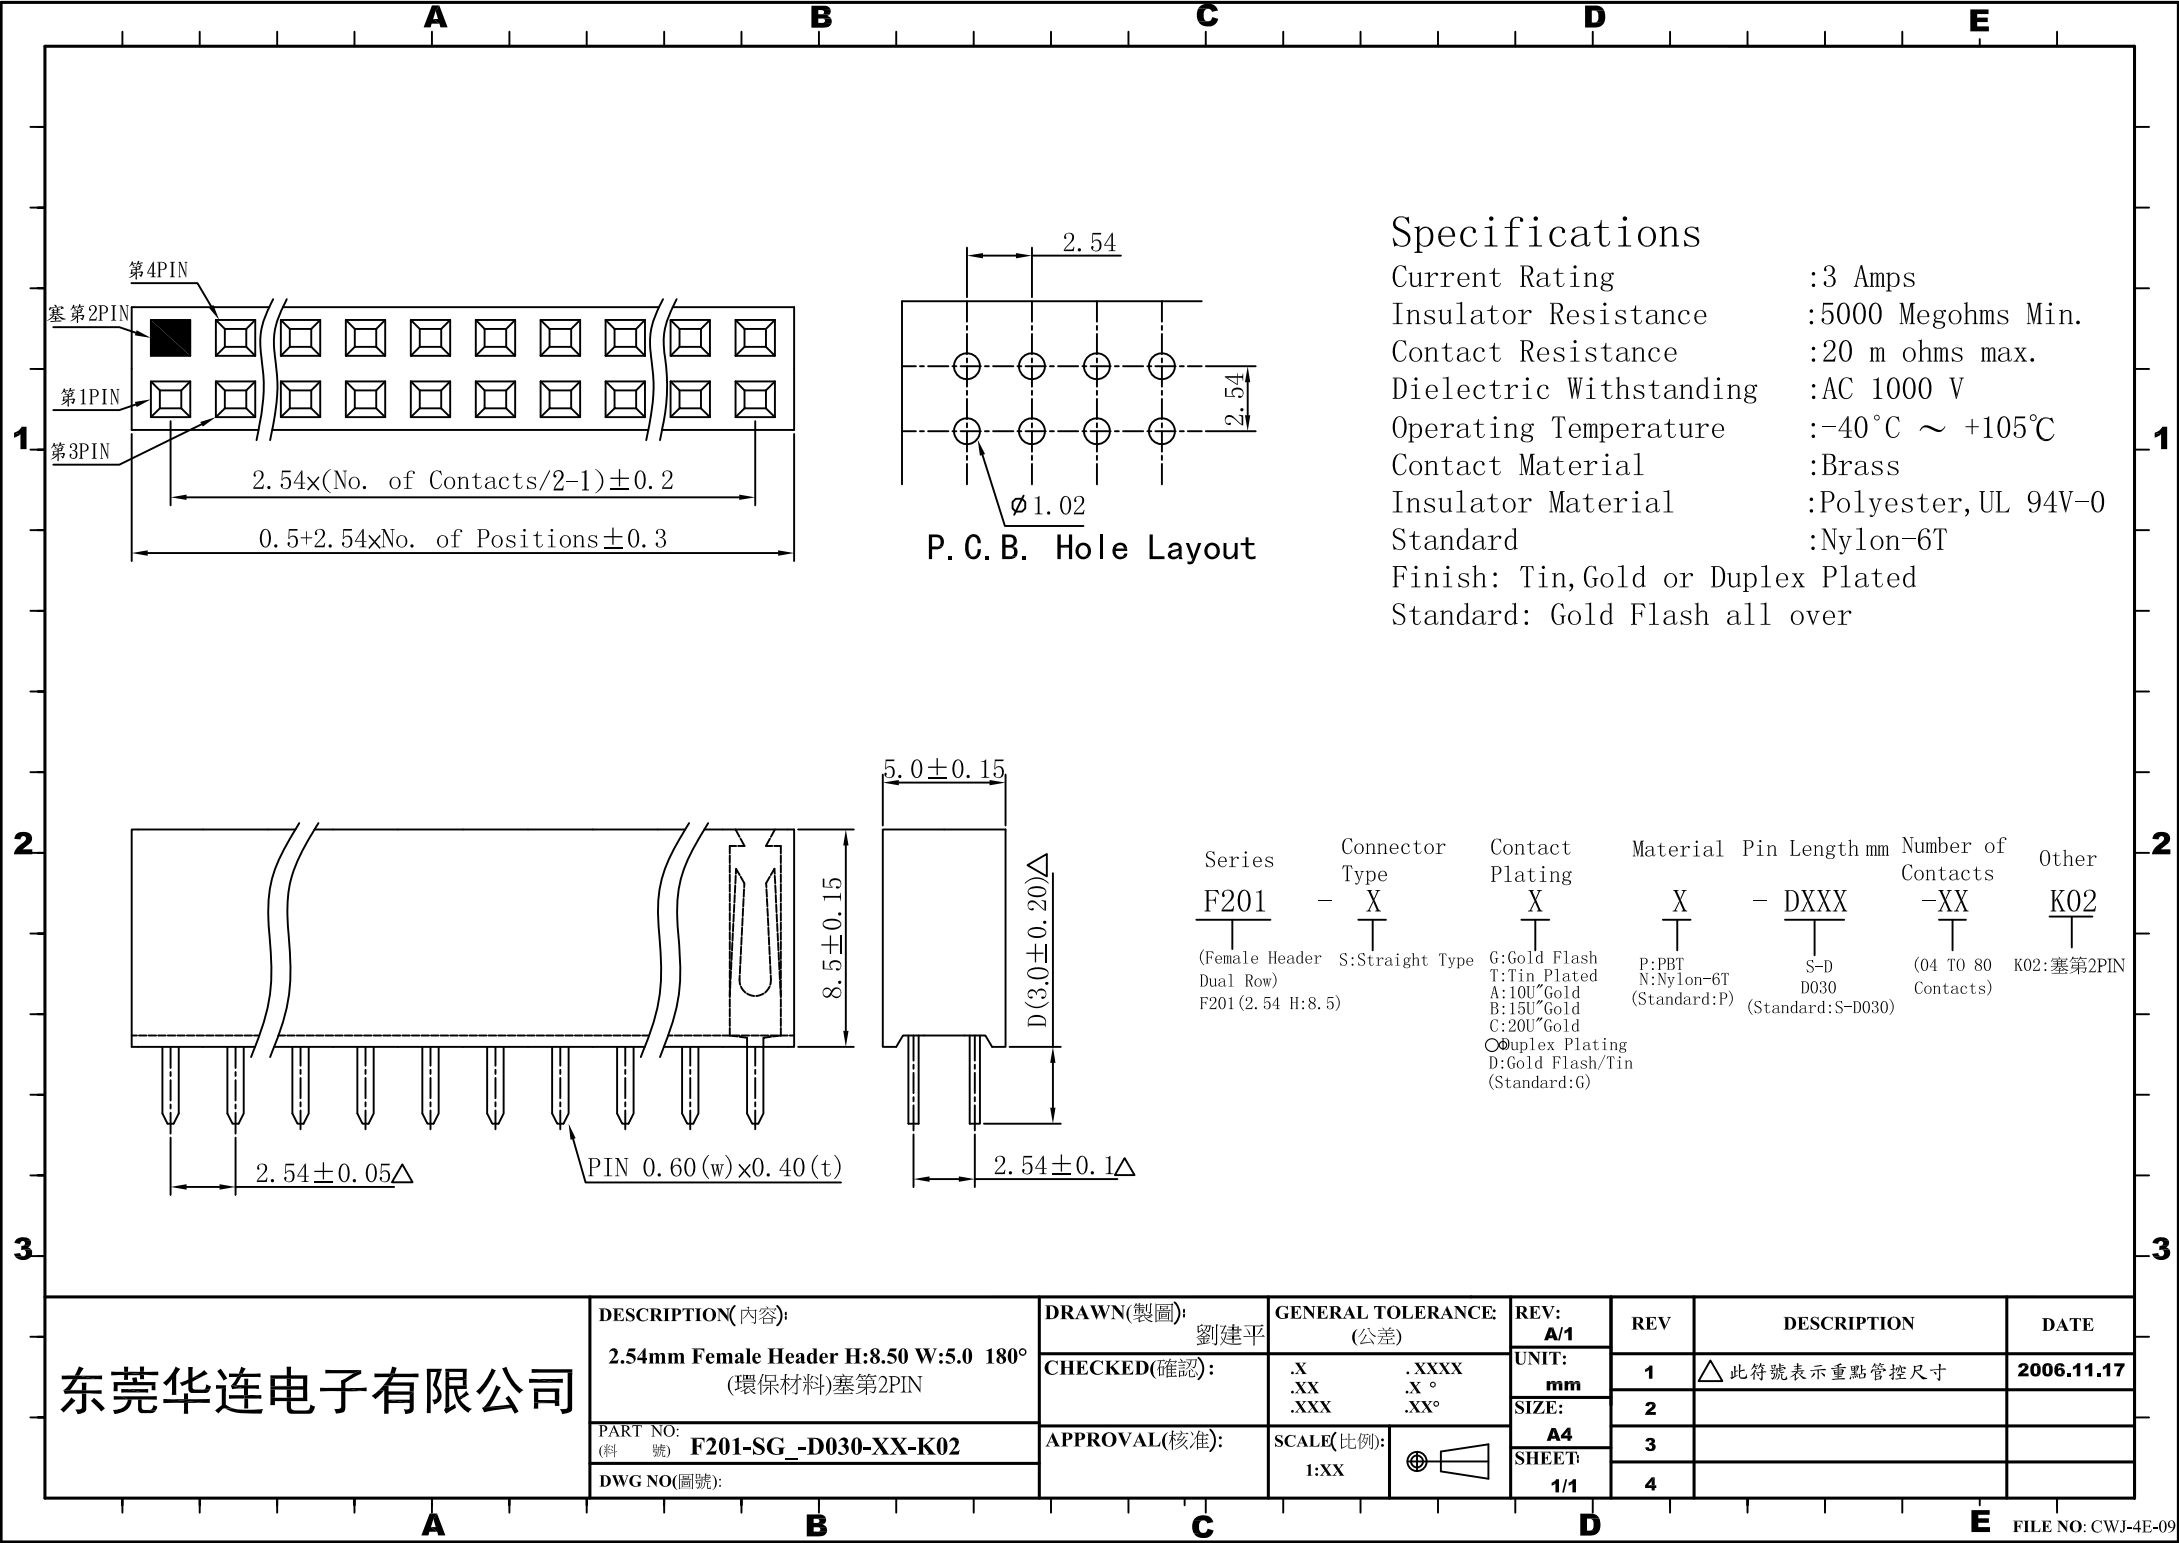

# Specifications

|                         |                           |
|-------------------------|---------------------------|
| Current Rating          | :3 Amps                   |
| Insulator Resistance    | :5000 Megohms Min.        |
| Contact Resistance      | :20 m ohms max.           |
| Dielectric Withstanding | :AC 1000 V                |
| Operating Temperature   | :-40°C ~ +105°C           |
| Contact Material        | :Brass                    |
| Insulator Material      | :Polyester, UL 94V-0      |
| Standard                | :Nylon-6T                 |
| Finish:                 | Tin,Gold or Duplex Plated |
| Standard:               | Gold Flash all over       |

| Series                                        | Connector Type   | Contact Plating                                                                                                                     | Material                            | Pin Length mm               | Number of Contacts  | Other       |
|-----------------------------------------------|------------------|-------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|-----------------------------|---------------------|-------------|
| F201                                          | X                | X                                                                                                                                   | X                                   | - DXXX                      | -XX                 | K02         |
| (Female Header Dual Row)<br>F201 (2.54 H:8.5) | S: Straight Type | G: Gold Flash<br>T: Tin Plated<br>A: 10U"Gold<br>B: 15U"Gold<br>C: 20U"Gold<br>O: Duplex Plating<br>D: Gold Flash/Tin (Standard: G) | P: PBT<br>N: Nylon-6T (Standard: P) | S-D D030 (Standard: S-D030) | (04 TO 80 Contacts) | K02: 塞第2PIN |

东莞华连电子有限公司

|                                                        |
|--------------------------------------------------------|
| DESCRIPTION(内容):                                       |
| 2.54mm Female Header H:8.50 W:5.0 180°<br>(環保材料)塞第2PIN |
| PART NO:<br>(料 號) F201-SG_-D030-XX-K02                 |
| DWG NO(圖號):                                            |

|                   |                                    |
|-------------------|------------------------------------|
| DRAWN(製圖):<br>劉建平 | GENERAL TOLERANCE:<br>(公差)         |
| CHECKED(確認):      | .X .XXXX<br>.XX .X °<br>.XXX .XX ° |
| APPROVAL(核准):     | SCALE(比例):<br>1:XX                 |

| REV:   | REV | DESCRIPTION   | DATE       |
|--------|-----|---------------|------------|
| A/1    |     |               |            |
| UNIT:  | 1   | △ 此符號表示重點管控尺寸 | 2006.11.17 |
| mm     | 2   |               |            |
| SIZE:  | 3   |               |            |
| A4     |     |               |            |
| SHEET: | 4   |               |            |
| 1/1    |     |               |            |