
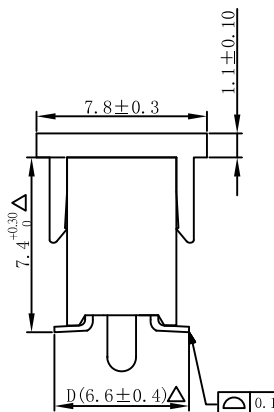


P. C. B. Hole Layout

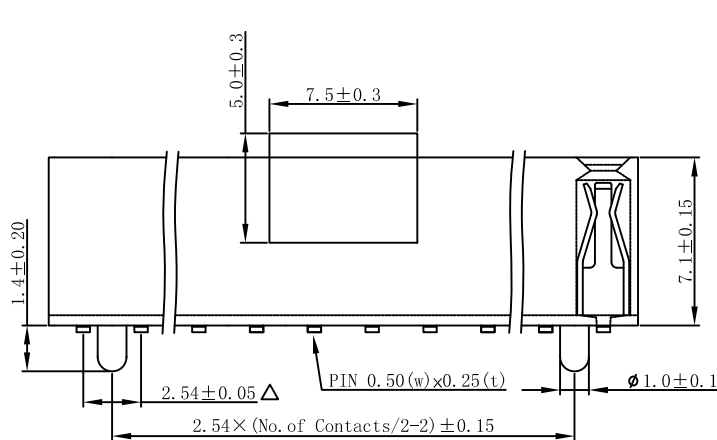

Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	:-40°C ~ +105°C
Soldering Temperature	:260°C for 3~5sec Max.
Contact Material	:Phosphor Bronze
Insulator Material	:Polyester,UL 94V-0
Standard	:Nylon-6T/LCP
Finish:	Tin,Gold or Duplex Plated
Standard:	Gold Flash all over

Series	Connector Type	Contact Plating	Material	Pin Lengthmm	Number of Contacts	Other
F202	X	X	X	DXXX	-XX	PRC
(Female Header Dual Row) F202 (2.54 H:7.1)	M:SMT Type	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	N:Nylon-6T C:LCP (Standard:N)	M-D D066	(04 TO 80 Contacts)	P:Peg R:REEL PACK C:CAP

东莞华连电子有限公司

DESCRIPTION(内容): 2.54mm Female Header H:7.1 W:5.00 SMT Peg+CAP+REEL (RoHS)	DRAWN(製圖): 鄧文廣	GENERAL TOLERANCE: (公差)	REV: A/1	REV	DESCRIPTION	DATE
	CHECKED(確認): 黃炳秋	X. ±0.30 X. ° ±5.0° .X ±0.20 .X ° ±3.0° .XX ±0.15 .XX ° ±1.0°	UNIT: mm	1	△此符號表示重點管控尺寸	2018.12.04
	PART NO: (料號) F202-MG_-D066-XX-PRC	APPROVAL(核准): 鄧文廣	SIZE: A4	3		
	DWG NO(圖號):	SCALE(比例): 1:XX	SHEET: 1/1	4		
				5		