

A

B


C

D





E

Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	:-40℃ ~ +105℃
Contact Material	:Phosphor Bronze
Insulator Material	:PBT/NY-6T UL94V-0
Finish: Tin, Gold or Duplex Plated	
Standard: Gold Flash all over	

Recommended P. C. Board
Hole Layout

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F206	X	X	X	DXXX	-XX
(Female Header Dual Row) F206 (2.54 H:6.7)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U" Gold B: 15U" Gold C: 20U" Gold © Duplex Plating D: Gold Flash/Tin (Standard: G)	P: PBT N: Nylon-6T (Standard: P)	S-D D035 (Standard: S-D035)	(04 TO 80 Contacts)

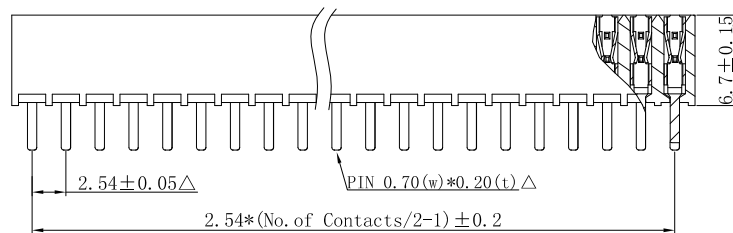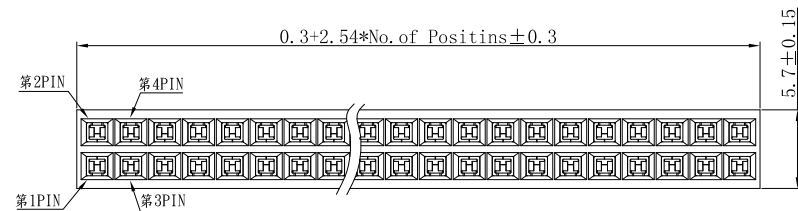

东莞华连电子有限公司

DESCRIPTION(内容): 2.54mm Female Header H:6.7 W:5.7 180° (RoHS)
PART NO: (料 號) F206-SG_-D035-XX
DWG NO(圖號):

DRAWN(製圖): 黄炳秋	GENERAL TOLERANCE: (公差)
CHECKED(確認):	.X .XXXX .XX .X ° .XXX .XX °
APPROVAL(核准):	SCALE(比例): 1:XX

REV:	REV	DESCRIPTION	DATE
A/2			
UNIT:	1	△此符号表示重點管控尺寸	2006.03.14
mm	2	修改图面修正版次ECN20161117-1	2016.11.17
SIZE:	3		
A4			
SHEET:	4		
X/X			

A

B

C

D

E