


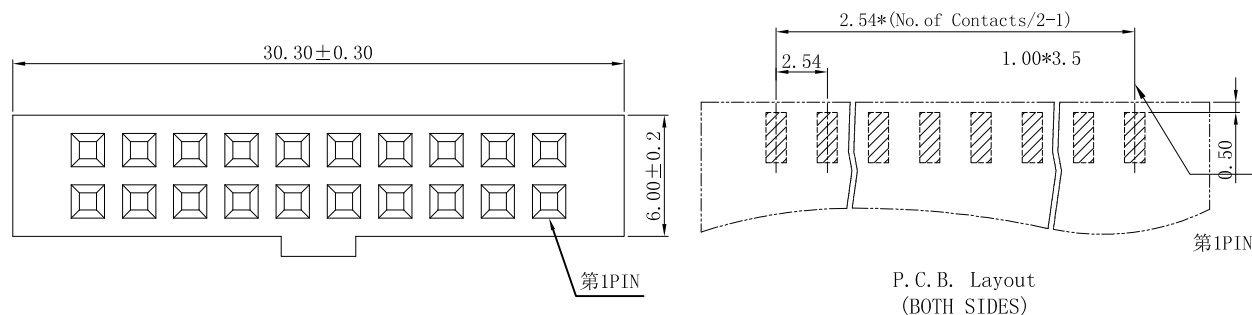

Material and Finish



1. Housing: Thermoplastic (UL94V-0), Black.
2. Terminal: Brass (t=0.40mm), Gold Plating.

Electrical Characteristics

1. Current Rating: 3.0 Amp. Max..
2. Dielectric Withstand Voltage:
1000V AC RMS for 60Seconds.
3. Insulation Resistance:
1000M Ohms Min. at 1000V DC.
4. Contact Resistance: 30m Ohms Max.

Mechanical Characteristics

1. Operating Temperature: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$

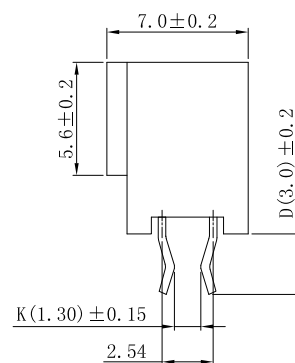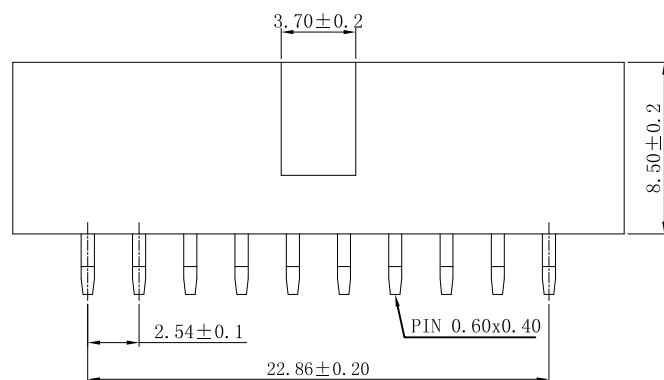

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts	other
<u>F213</u>	- <u>X</u>	<u>X</u>	<u>X</u> - <u>DXXX</u>	- <u>XX</u> - <u>H</u>		
(Female Header Dual Row)	K: "K" Type K: 1.3mm	G: Gold Flash T: Tin Plated A: 10μ"Gold B: 15μ"Gold C: 20μ"Gold Duplex Plating D: Gold Flash/Tin (Standard: G)	P: PBT N: Nylon 6T (Standard: P)	K-D D030	(08 TO 50 Contacts)	H: 防呆無倒角
F213(2.54 H: 8.5 W: 7.0 两头加长塞孔)						

东莞华连电子有限公司

DESCRIPTION(内容) 2.54mm Female Header H:8.5 W:7.0 (含防呆) 夾板式, 塑膠两头加长 镀金20u" 2*10Pin (RoHS)	DRAWN(製圖): 黃炳秋	GENERAL TOLERANCE: (公差) 0.0 ± 0.30 0.00 ± 0.20		REV: A/1	REV	DESCRIPTION	DATE
	CHECKED(確認):			UNIT: mm			
		SIZE:	2				
		PART NO: (料 號) F213-KC_-D030-20-H	APPROVAL(核准):	SCALE(比例): 1:XX		A4	3
DWG NO(圖號):				SHEET: 1/1	4		