

A

B



C

D

E

1

1

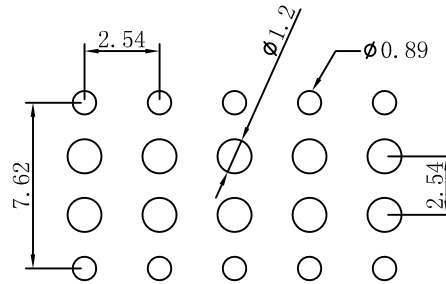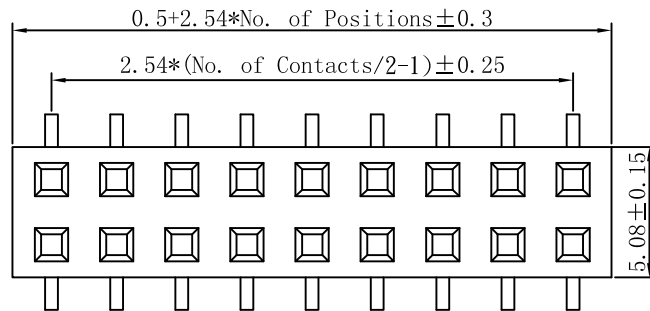



P. C. B Layout

Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Phosphor Bronze
Insulator Material	:Polyester, UL 94V-0
Standard	:Nylon-6T
Finish:	Tin, Gold or Duplex Plated
Standard:	Gold Flash all over

2

2

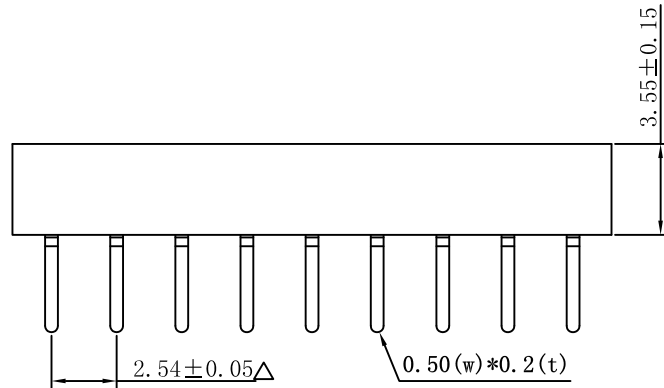

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F222	X	X	X	DXXX	-XX
(Female Header Dual Row) F222 (2.54 H:3.55)	L:蜈蚣腳 L1:7.62MM ...	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin F:Gold Flash/Tin 30U" (Standard:G)	N:Nylon-6T (Standard:N)	L-D D037 (Standard:L-D037)	(04 TO 80 Contacts)

3

3

东莞华连电子有限公司

DESCRIPTION(内容):

2.54mm Female Header H:3.55 W:5.08
蜈蚣腳排母 (RoHS)PART NO:
(料 號)

F222-L1G_-D037-XX

DWG NO(圖號):

DRAWN(製圖):

黄炳秋

CHECKED(確認):

GENERAL TOLERANCE:

(公差)

.X .XXXX
.XX .X°
.XXX .XX°

APPROVAL(核准):

SCALE(比例):

XX:XX



REV:

A/1

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

1

2

3

4

DESCRIPTION

△此符号表示重點管控尺寸

DATE

2023.12.21

A

B

C

D

E

FILE NO: CWJ-4E-09