


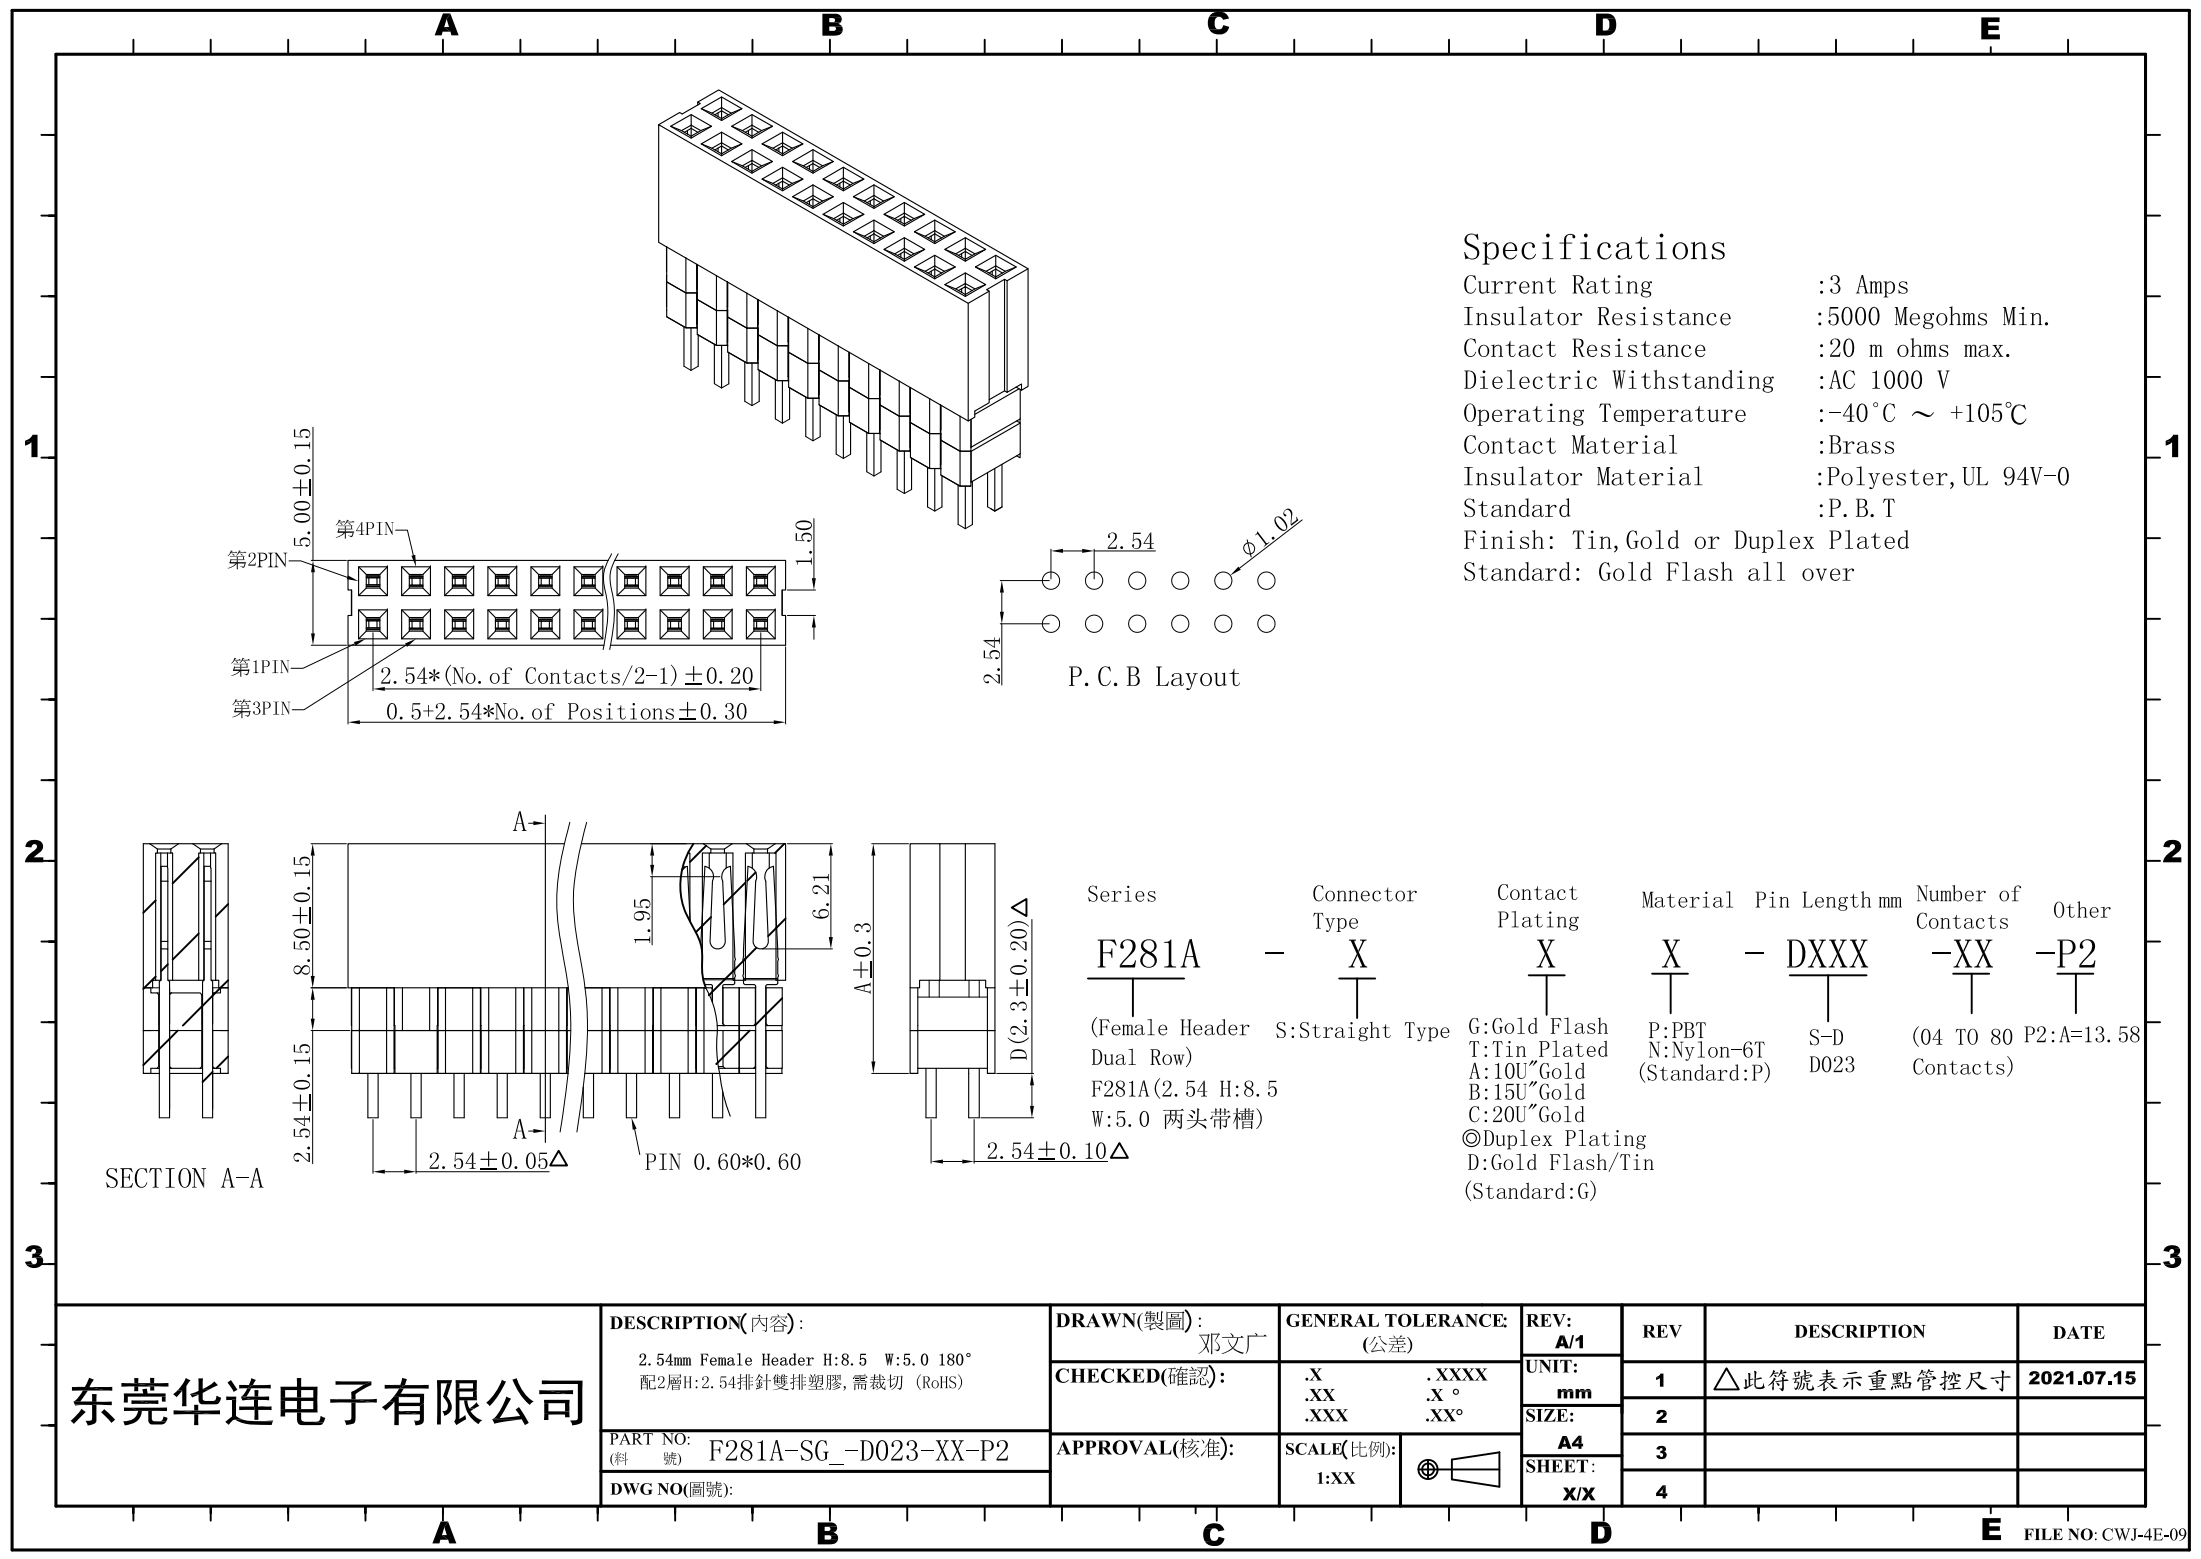

Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	:-40℃ ~ +105℃
Contact Material	:Brass
Insulator Material	:Polyester, UL 94V-0
Standard	:P. B. T
Finish	:Tin, Gold or Duplex Plated
Standard	:Gold Flash all over

SECTION A-A

东莞华连电子有限公司

DESCRIPTION(内容):
2.54mm Female Header H:8.5 W:5.0 180°
配2層H:2.54排針雙排塑膠,需裁切 (RoHS)

PART NO:
(料 號) F281A-SG_-D023-XX-P2
DWG NO(圖號):

DRAWN(製圖):
邓文广

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差)

.X .XXXX
.XX .X°
.XXX .XX°

SCALE(比例):
1:XX

REV:
A/1

UNIT:
mm

SIZE:
A4

SHEET:
X/X

REV

1

2

3

4

DESCRIPTION

△此符號表示重點管控尺寸

DATE

2021.07.15