
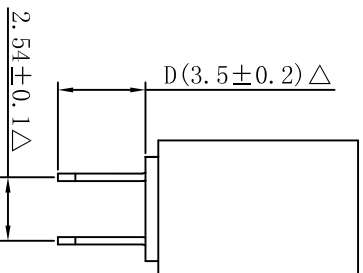


P.C.B.Layout

Specifications

Current Rating	: 3 Amps
Insulator Resistance	: 5000 Megohms Min.
Contact Resistance	: 20 m ohms max.
Dielectric Withstanding	: AC 1000 V
Operating Temperature	: -40 °C ~ +105°C
Insulator Material	: Polyester, UL94V-0
Standard	: P, B, T
Contact Material	: Phosphor Bronze
Finish: Tin, Gold or Duplex Plated	
Standard: Gold Flash all over	

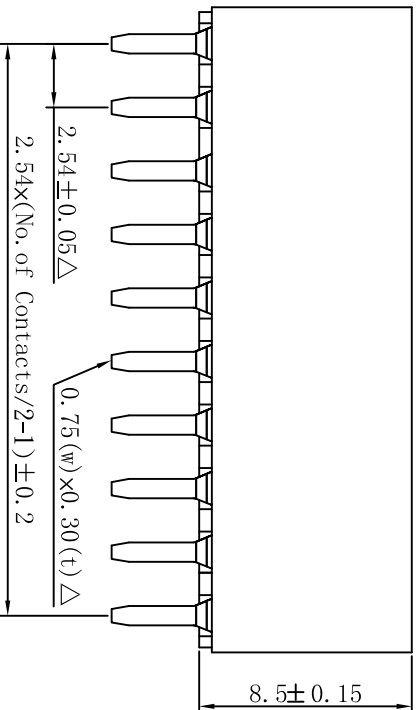

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F291	X	X	X	DXXX	-XX
(Female Header Dual Row) F291 (2.54 H:8.5 With stand off)					
S: Straight Type			P: PBT N: Nylon-6T (Standard: P)	S-D D035	(04 TO 80 Contacts)
G: Gold Flash					
T: Tin Plated					
A: 100% Gold					
B: 150% Gold					
C: 200% Gold					(Standard: S-D035)

● Duplex Plating
D: Gold Flash/Tin
F: Gold Flash/Tin 100"
(Standard: G)


DESCRIPTION(内容):
2.54mm Female Header H:8.5 W:5.5 180° (RoHS)
PART NO: F291-SG_-D035-XX (料 號)
DWG NO(圖號):

DRAWN(製圖):	GENERAL TOLERANCE:
黃炳秋	(公差)
CHECKED(確認):	.X .XXXX .XX .X° .XXX .XX°
APPROVAL(核准):	SCALE(比例): XX:XX

REV:	REV	DESCRIPTION	DATE
A/1	1	△此符號表示重點管控尺寸	2024.03.04
	2		
	3		
	4		
SHEET:	1/1		

东莞华连电子有限公司



1. 外箱規格：40x28x28cm 可以裝34盤產品

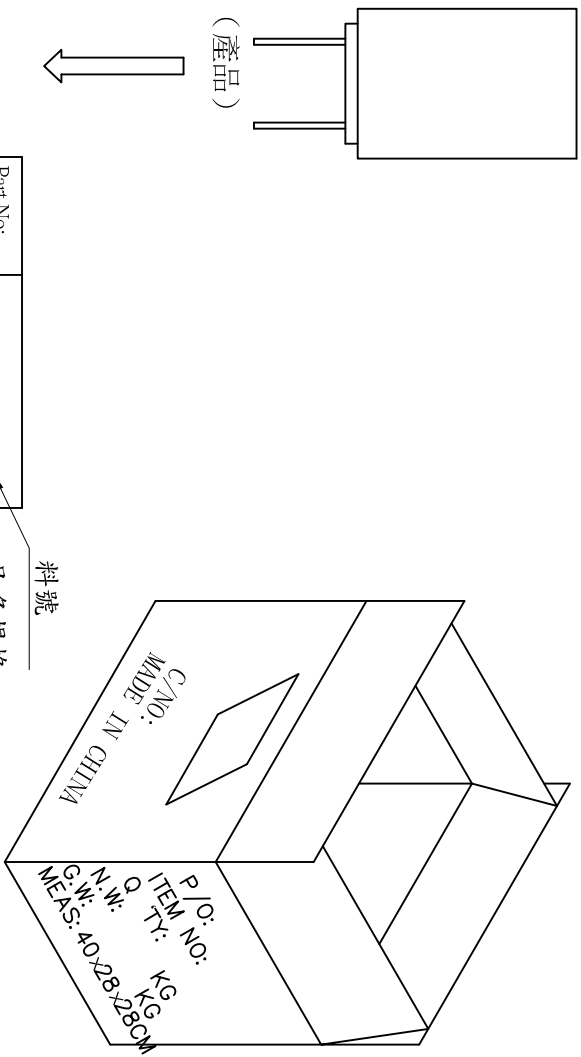

Part No:	
Description:	
Quantity:	
Date:	

品名規格
數量 (1外箱可以裝34盤產品)

日期

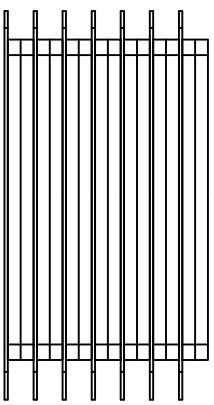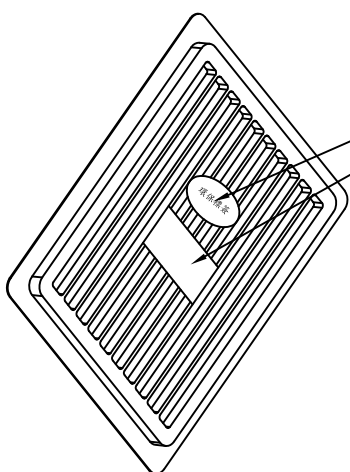

PIN數	空盤規格	每袋數量	單重	PIN數	空盤規格	每袋數量	單重
2*2	V001	500/PCS	0.47382	2*21	V004	60/PCS	4.97511
2*3	V001	500/PCS	0.71073	2*22	V004	60/PCS	5.21202
2*4	V001	400/PCS	0.94764	2*23	V004	60/PCS	5.44893
2*5	V001	250/PCS	1.18455	2*24	V004	60/PCS	5.68584
2*6	V001	250/PCS	1.42146	2*25	V004	60/PCS	5.92272
2*7	V001	200/PCS	1.65837	2*26	V004	60/PCS	6.15966
2*8	V004	180/PCS	1.89528	2*27	V004	40/PCS	6.39657
2*9	V004	160/PCS	2.13219	2*28	V004	40/PCS	6.63348
2*10	V004	140/PCS	2.36910	2*29	V004	40/PCS	6.87039
2*11	V004	140/PCS	2.60601	2*30	V004	40/PCS	7.10730
2*12	V004	120/PCS	2.84292	2*31	V004	40/PCS	7.34421
2*13	V004	100/PCS	3.07983	2*32	V004	40/PCS	7.58112
2*14	V004	100/PCS	3.31674	2*33	V004	40/PCS	7.81803
2*15	V004	80/PCS	3.55365	2*34	V004	40/PCS	8.05494
2*16	V004	80/PCS	3.79056	2*35	V004	40/PCS	8.29185
2*17	V004	80/PCS	4.02747	2*36	V004	40/PCS	8.52876
2*18	V004	80/PCS	4.26438	2*37	V004	40/PCS	8.76567
2*19	V004	80/PCS	4.50129	2*38	V004	40/PCS	9.00258
2*20	V004	60/PCS	4.73820	2*39	V004	40/PCS	9.23949
				2*40	V004	20/PCS	9.47640

(V004真空盤)

DESCRIPTION(內容): 2. 54mm Female Header H:8.5 W:5.5 180° (環保材料)		DRAWN(製圖): 龍知		GENERAL TOLERANCE: (公差)		REV: A/3		REV		DESCRIPTION		DATE	
CHECKED(確認): 李建安		SCALE(比例): 1:XX		UNIT: mm		1		2		包裝數量有變動		2011.08.30	
APPROVAL(核准): 鄧文廣		SHEET: 1/1		A4		3		2*2 包裝數量有變動		2016.11.28			

東莞華連電子有限公司

A

B

C

D

E

FILE NO: CWJ-4E-09