



P. C. B Layout

Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	:-40°C ~ +105°C
Soldering Temperature	:260°C for 3~5sec Max.
Contact Material	:Phosphor Bronze
Insulator Material	:Polyester, UL 94V-0
Finish: Tin, Gold or Duplex Plated	
Standard: Gold Flash all over	

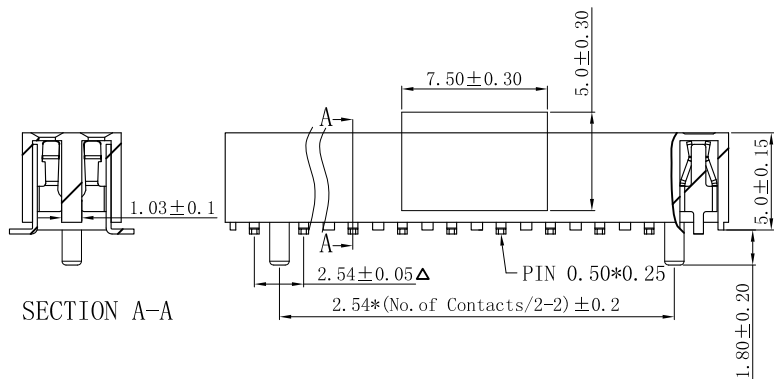

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts	Other
F294	X	X	X	DXXX	-XX	-PRC
(Female Header Dual Row) F294 (2.54 H:5.0 With stand off)	M: SMT Type	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ©Duplex Plating D: Gold Flash/Tin (Standard: G)	N: Nylon-6T C: LCP (Standard: N)	M-D D065	(04 TO 80 Contacts)	P: PEG R: REEL C: CAP

东莞华连电子有限公司

DESCRIPTION(内容):
2.54mm Female Header H:5.0 W:5.08
SMT PEG REEL+CAP(RoHS)

PART NO:
(料 號) F294-MG_-D065-XX-PRC

DWG NO(圖號):

DRAWN(製圖):
黃炳秋

CHECKED(確認):


APPROVAL(核准):

GENERAL TOLERANCE:
(公差)

.X .XXXX
.XX .X °
.XXX .XX °

SCALE(比例):

XX:XX



REV:
A/1

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV

1

2

3

4

DESCRIPTION

△此符號表示重點管控尺寸

DATE

2011.06.04