
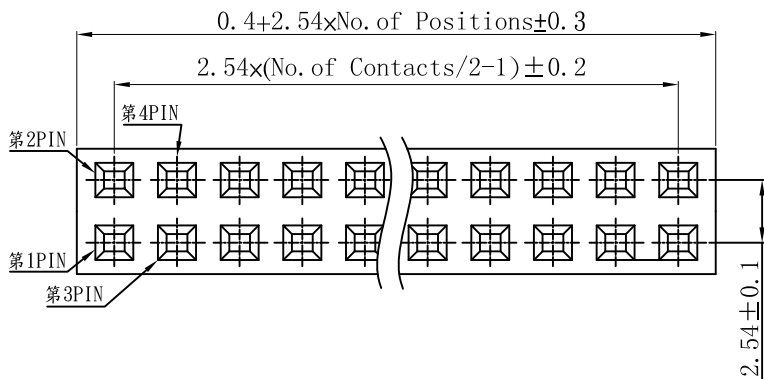


P. C. B. Hole Layout

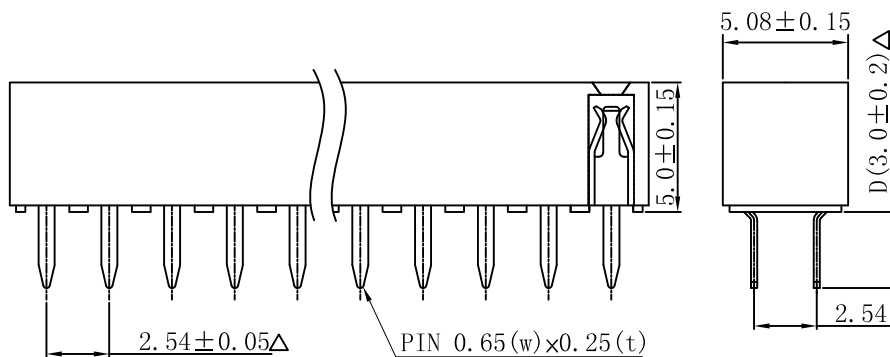

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F294	X	X	X	DXXX	-XX
(Female Header Dual Row) F294(2.54 H:5.0 W:5.08)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold © Duplex Plating D: Gold Flash/Tin (Standard: G)	P: PBT N: Nylon-6T (Standard: P)	S-D D030 (Standard: S-D030)	(04 TO 80 Contacts)

Specifications

Current Rating	: 3 Amps
Insulator Resistance	: 5000 Megohms Min.
Contact Resistance	: 20 m ohms max.
Dielectric Withstanding	: AC 1000 V
Operating Temperature	: -40°C ~ +105°C
Contact Material	: Phosphor Bronze
Insulator Material	: Polyester, UL 94V-0
Standard	: P. B. T
Finish	: Tin, Gold or Duplex Plated
Standard	: Gold Flash all over

东莞华连电子有限公司

DESCRIPTION(内容):
2.54mm Female Header H:5.0 W:5.08 180° (環保材料)
PART NO: (料號) F294-SG_-D030-XX
DWG NO(圖號):

DRAWN(製圖):	GENERAL TOLERANCE:
劉建平	(公差)
CHECKED(確認):	.X .XXXX
劉建平	.XX .X°
APPROVAL(核准):	.XXX .XX°
邓文广	SCALE(比例):
	XX:XX

REV	DESCRIPTION	DATE
A/4		
UNIT:		
mm		
SIZE:		
A4		
SHEET:		
1/1		