



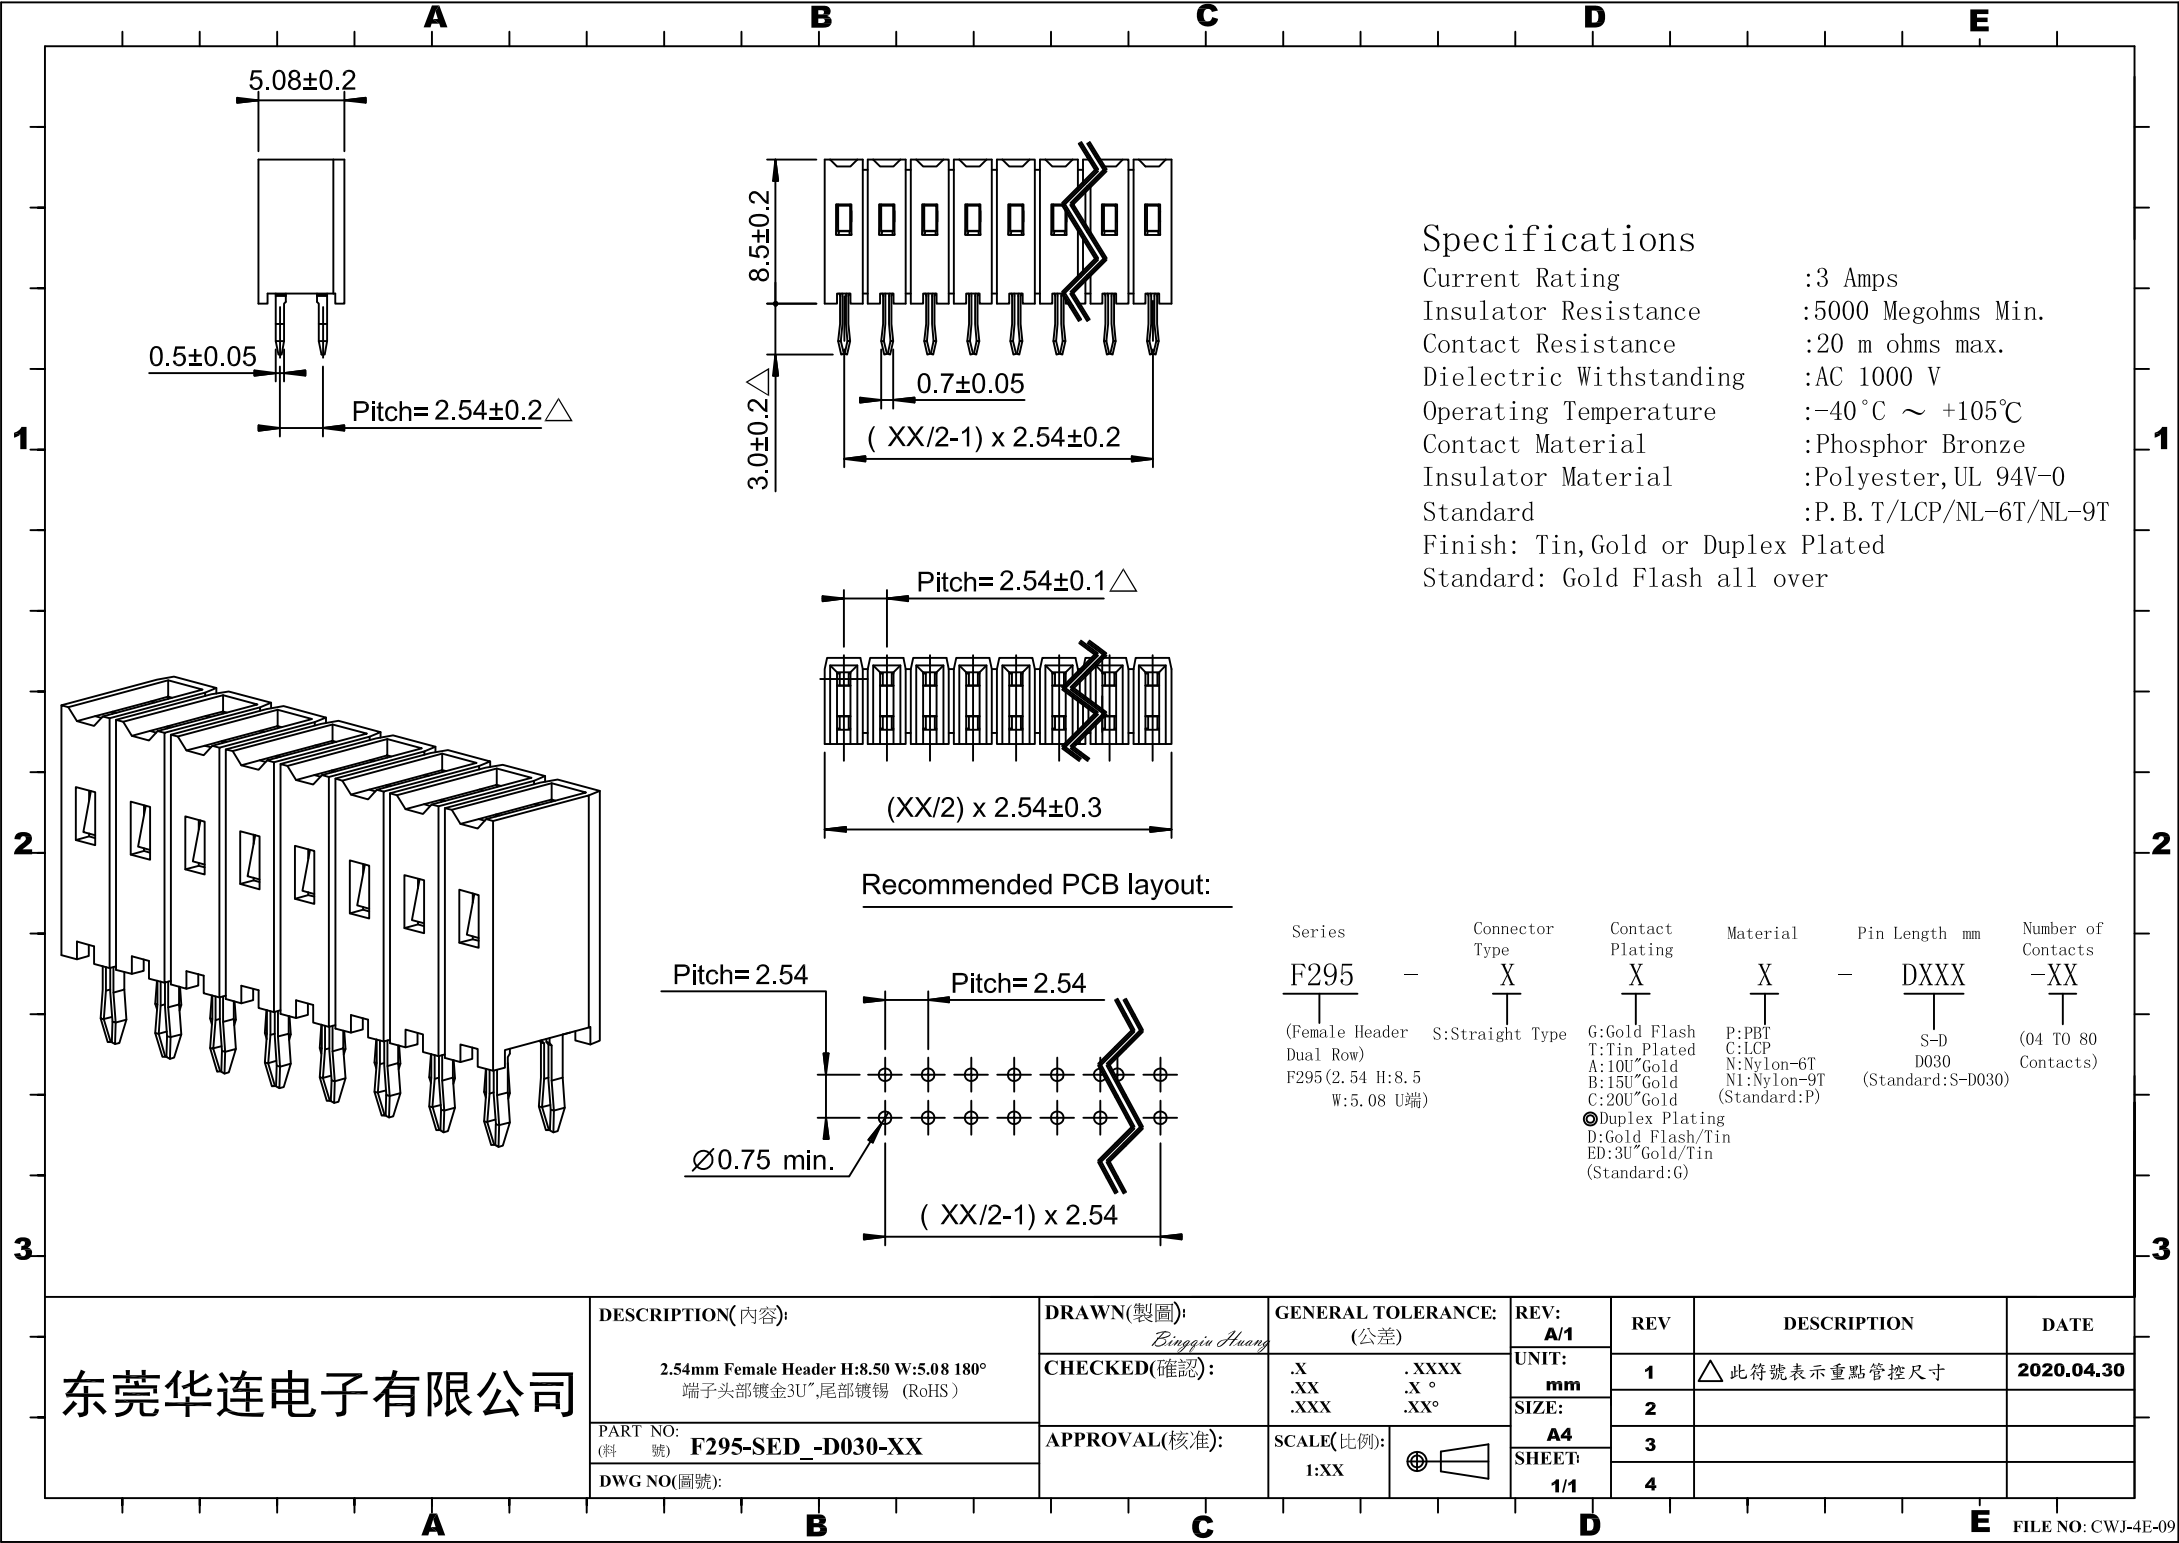

Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	:-40℃ ~ +105℃
Contact Material	:Phosphor Bronze
Insulator Material	:Polyester, UL 94V-0
Standard	:P. B. T/LCP/NL-6T/NL-9T
Finish	:Tin, Gold or Duplex Plated
Standard	:Gold Flash all over

Recommended PCB layout:

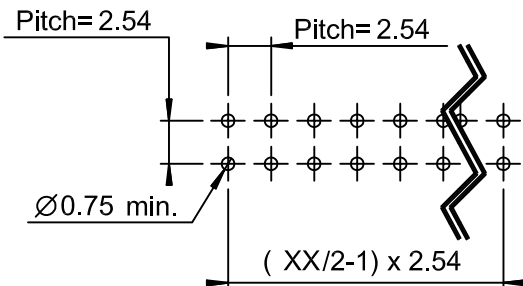

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F295	X	X	X	DXXX	-XX
(Female Header Dual Row) F295 (2.54 H:8.5 W:5.08 U端)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold	P: PBT C: LCP N: Nylon-6T N1: Nylon-9T (Standard: P)	S-D D030 (Standard: S-D030)	(04 TO 80 Contacts)
● Duplex Plating D: Gold Flash/Tin ED: 3U"Gold/Tin (Standard: G)					

东莞华连电子有限公司

DESCRIPTION(內容):	DRAWN(製圖):	GENERAL TOLERANCE: (公差)		REV: A/1	REV	DESCRIPTION	DATE
	Bingqiu Huang	CHECKED(確認):	.X .XXX	. XXXX	UNIT: mm	△ 此符號表示重點管控尺寸	2020.04.30
			.XX .X °	SIZE: A4			
			.XXX .XX °	SHEET: 1/1			
PART NO: (料 號) F295-SED _D030-XX	APPROVAL(核准):	SCALE(比例): 1:XX					
DWG NO(圖號):							