


P. C. B SMT Layout

Specifications

Current Rating	: 0.8 Amp
Insulator Resistance	: 900 Megohms Min.
Contact Resistance	: 20 m ohms max.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40° C ~ +105° C
Soldering Temperature	: 260° C for 3~5sec Max.
Contact Material	: Phosphor Bronze
Insulator Material	: High Temperature Thermoplastic. UL 94V-0
Standard Finish	: LCP
Standard	: Gold Plated
Standard	: Gold Flash all over

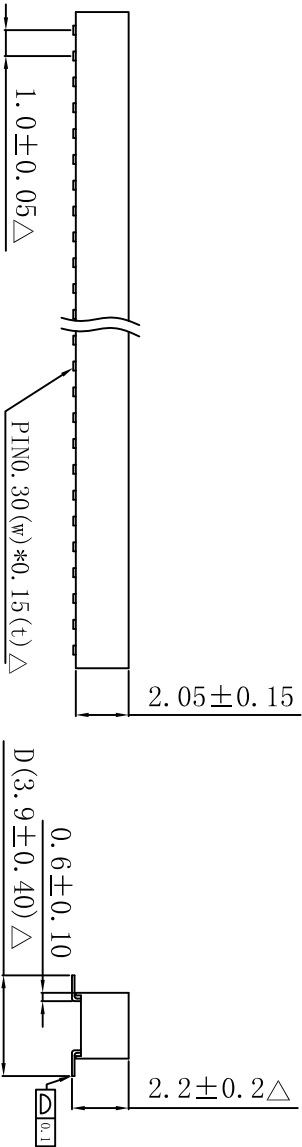

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F801	-	X	X	-	-XX
(Female Header Dual Row)	M:SMT Type	T:Gold Flash C:ICP	T:Gold Plated (Standard:C)	M-D D039	(04 TO 80 Contacts)
F801 (1.00 H:2.05 W:2.55)					

◎Duplex Plating
D:Gold Flash/Tin
(Standard:G)

DESCRIPTION(内容):		DRAWN(製圖):		GENERAL TOLERANCE:		REV:	REV	DESCRIPTION	DATE
1.00mm Female Header H:2.05 SMT LCP (RoHS)		黄炳秋		(公差)		A/2			
PART NO: F801-MGC-D039-XX		CHECKED(確認):		X. ±0.30	X.° ±5.0°	UNIT: mm	1	△此符號表示重貼管控尺寸	2014.12.10
DWG NO(圖號):		APPROVAL(核准):		X. ±0.20	X.° ±4.0°	SIZE: A4	2	修改P. C. B SMT Layout	2014.12.16
		SCALE(比例):		.XX ±0.15	.XX° ±1.0°	SHEET: 1/1	3		
				XX:XX			4		

东莞华连电子有限公司

A

B


C

D



E

FILE NO: CWJ-4E-09

1. 真空管規格: 325x7.7x6.0mm
2. 外紙箱規格: 40x28x30cm(620g)
3. 注未夠一整箱, 請酌量選箱進行包裝



(產品)






(真空管)



料號	品名規格
數量	日期
日期	

標簽

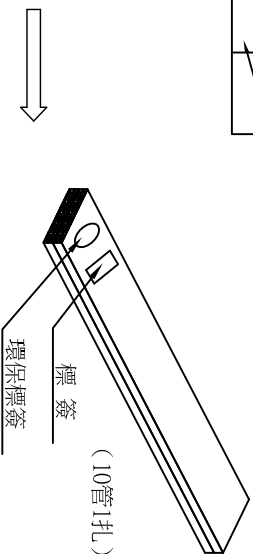

PIN數	包材名稱	每管數量	單重	PIN數	包材名稱	每管數量	單重
2*2	P092-1	125/PCS	0.02524	2*21	P092-1	14/PCS	0.26502
2*3	P092-1	88/PCS	0.03786	2*22	P092-1	13/PCS	0.27764
2*4	P092-1	68/PCS	0.05048	2*23	P092-1	12/PCS	0.29026
2*5	P092-1	55/PCS	0.06310	2*24	P092-1	12/PCS	0.30288
2*6	P092-1	46/PCS	0.07572	2*25	P092-1	11/PCS	0.31550
2*7	P092-1	40/PCS	0.08834	2*26	P092-1	11/PCS	0.32812
2*8	P092-1	35/PCS	0.10096	2*27	P092-1	11/PCS	0.34074
2*9	P092-1	32/PCS	0.11338	2*28	P092-1	10/PCS	0.35336
2*10	P092-1	28/PCS	0.12620	2*29	P092-1	10/PCS	0.36598
2*11	P092-1	27/PCS	0.13882	2*30	P092-1	9/PCS	0.37860
2*12	P092-1	24/PCS	0.15144	2*31	P092-1	9/PCS	0.39122
2*13	P092-1	22/PCS	0.16406	2*32	P092-1	9/PCS	0.40384
2*14	P092-1	20/PCS	0.17668	2*33	P092-1	9/PCS	0.41646
2*15	P092-1	19/PCS	0.18930	2*34	P092-1	8/PCS	0.42908
2*16	P092-1	18/PCS	0.20192	2*35	P092-1	8/PCS	0.44170
2*17	P092-1	17/PCS	0.21454	2*36	P092-1	8/PCS	0.45432
2*18	P092-1	16/PCS	0.22716	2*37	P092-1	8/PCS	0.46694
2*19	P092-1	15/PCS	0.23978	2*38	P092-1	7/PCS	0.47956
2*20	P092-1	14/PCS	0.25240	2*39	P092-1	7/PCS	0.49218
				2*40	P092-1	7/PCS	0.50480

2

2

1

1

3

3

DESCRIPTION(內容): 1.00mm Female Header H:2.05 SMT		DRAWN(製圖): 黃炳秋		GENERAL TOLERANCE: (公差)		REV: A/2		REV		DESCRIPTION		DATE	
LCP (環保材料)		CHECKED(確認):		.X .XXX .X°		UNIT: mm		1		修改包裝管		2014.12.10	
PART NO: F801-MGC-0039-XX(包裝圖)		APPROVAL(核准):		SCALE(比例): 1:XX		SHEET: 1/1		3				2015.12.07	
DWG NO(圖號):								4					

东莞华连电子有限公司

A

B

C

D

E