
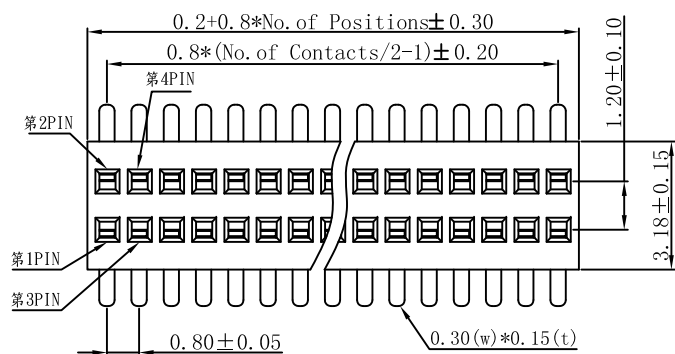



Specifications


Current Rating	:0.8 Amp
Insulator Resistance	:800 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40° C ~ +105°C
Soldering Temperature	:260° C for 3-5sec Max.
Contact Material	:Phosphor Bronze
Insulator Material	:NY-9T, UL94V-0, Black
Finish	:Gold Plated
Standard	:Gold Flash all over

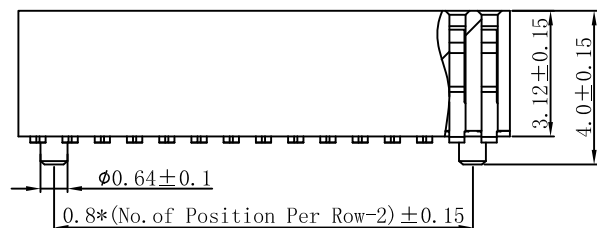


Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts	Other
F901	X	X	X	DXXX	-XX	-P
(Female Header Dual Row) F901(0.8 H:3.12 W:3.18)	M:SMT Type	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ●Duplex Plating D:Gold Flash/Tin (Standard:G)	N1:PA9T (Standard:N1)	M:D D050	(08 TO 80 Contacts)	P:定位柱

东莞华连电子有限公司



DESCRIPTION(内容): 0.8mm Female Header H:3.12 SMT LCP 帶定位柱 (RoHS)	DRAWN(製圖): 黃炳秋	GENERAL TOLERANCE: (公差)		REV: A/1	REV	DESCRIPTION	DATE
	CHECKED(確認):	X. ±0.30 X. ° ±5.0° .X ±0.20 .X ° ±3.0° .XX ±0.15 .XX° ±1.0°		UNIT: mm	1	△ 此符號表示重點管控尺寸	2022.10.28
	PART NO: (料 號) F901-MGN1-D050-XX-P			SIZE: A4	2		
	DWG NO(圖號):	APPROVAL(核准):	SCALE(比例): XX:XX 	SHEET: X/X	3		
				4			



(產品)

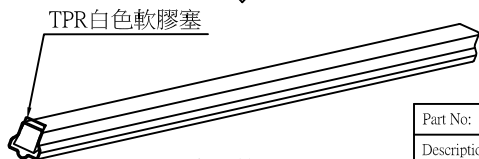


(真空管)



Part No:		料號
Description:		品名規格
Quantity:		數量
Date:		日期


內標籤

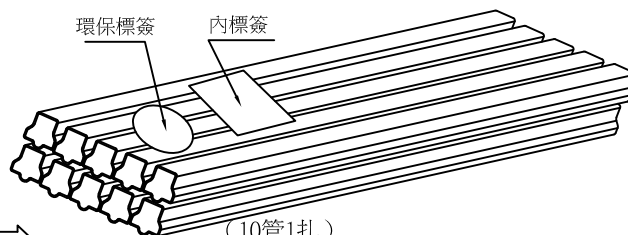

(10管1扎)

環保標籤

內標籤

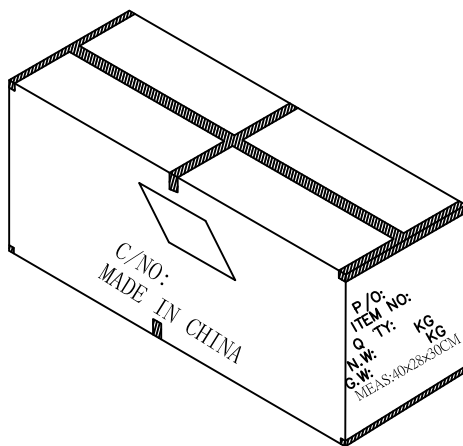

(200扎真空管裝1箱)

- 1.真空管規格：315x6.9x7.2mm
- 2.外箱規格：40x28x30cm (單重:620g)
- 3.注未夠一整箱,請酌量選箱進行包裝

PIN數	包材名稱	每管數量	單重/g	PIN數	包材名稱	每管數量	單重/g
2*1	P006-1	17/PCS	0.27978	2*21	P006-1	17/PCS	0.27978
2*2	P006-1	166/PCS	0.02666	2*22	P006-1	16/PCS	0.29311
2*3	P006-1	115/PCS	0.03999	2*23	P006-1	16/PCS	0.30644
2*4	P006-1	88/PCS	0.05332	2*24	P006-1	15/PCS	0.31977
2*5	P006-1	71/PCS	0.06665	2*25	P006-1	14/PCS	0.33331
2*6	P006-1	60/PCS	0.07983	2*26	P006-1	14/PCS	0.34643
2*7	P006-1	51/PCS	0.09316	2*27	P006-1	13/PCS	0.35976
2*8	P006-1	45/PCS	0.10649	2*28	P006-1	13/PCS	0.37309
2*9	P006-1	40/PCS	0.11982	2*29	P006-1	12/PCS	0.38642
2*10	P006-1	37/PCS	0.13315	2*30	P006-1	12/PCS	0.39975
2*11	P006-1	33/PCS	0.14648	2*31	P006-1	12/PCS	0.41308
2*12	P006-1	30/PCS	0.15981	2*32	P006-1	11/PCS	0.42641
2*13	P006-1	28/PCS	0.17314	2*33	P006-1	13/PCS	0.43974
2*14	P006-1	26/PCS	0.18647	2*34	P006-1	10/PCS	0.45307
2*15	P006-1	24/PCS	0.1998	2*35	P006-1	10/PCS	0.46640
2*16	P006-1	23/PCS	0.21313	2*36	P006-1	10/PCS	0.47973
2*17	P006-1	21/PCS	0.22646	2*37	P006-1	10/PCS	0.49306
2*18	P006-1	20/PCS	0.23979	2*38	P006-1	9/PCS	0.50639
2*19	P006-1	19/PCS	0.25312	2*39	P006-1	9/PCS	0.51972
2*20	P006-1	18/PCS	0.26645	2*40	P006-1	9/PCS	0.53305

东莞华连电子有限公司

DESCRIPTION(內容):
0.8mm Female Header H:3.12
SMT LCP 帶定位柱
(環保材料)

PART NO:
(料號) F901-MGX-D050-XX-P(包裝圖)

DWG NO(圖號):

DRAWN(製圖):
黃炳秋

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差)

.X .XXXX
.XX .X°
.XXX .XX°

SCALE(比例):
1:XX

REV:
A/1

UNIT:

SIZE:

A4

SHEET:
1/1

REV

1

2

3

4

DESCRIPTION

DATE

2008.06.04