
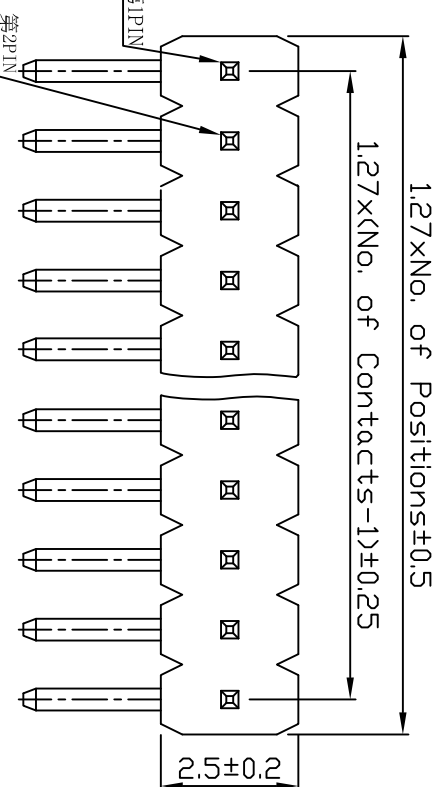


P. C. B Hole Layout


Specifications	
Current Rating	: 1 Amp
Insulator Resistance	: 1000 Megohms Min.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40 °C ~ +105°C
Contact Material	: Copper Alloy
Insulator Material	: Polyester, UL 94V-0
Standard Finish	: Nylon-6T
Standard	: Gold Plated
Standard	: Gold Flash all over

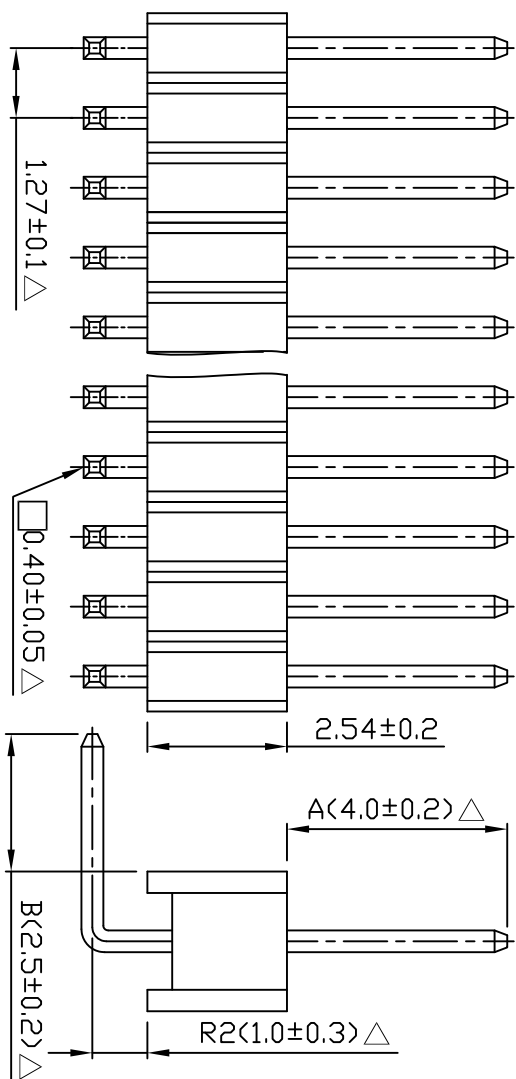



Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
P501	- X	X	X -	A / B	X X
(Pin Header Single Row)	R: Right Angle Type T: Tin Plated A: 100" Gold B: 150" Gold C: 200" Gold D: Duplex Plating (Standard: G)	G: Gold Flash N: Nylon-6T I: Tin A: 100" Gold B: 150" Gold C: 200" Gold D: Duplex Plating (Standard: G)	N: Nylon-6T - LCP (Standard: N)	A (040) B (025) (If you desire on other length, by marking put desired in the A/B)	(01 TO 50 Contacts)

DESCRIPTION(内容):		DRAWN(製圖):		GENERAL TOLERANCE:		REV:	REV	DESCRIPTION		DATE
1.27mm Pin Header H:2.54 90° □=0.40		黃炳秋		(公差)		A/1	1	△ 此符號表示重點管控尺寸		2009.02.09
(環保材料)		CHECKED(確認):		X .XXX	.XXXX	UNIT: mm	2			
PART NO: P501-R2G_-040/025-XX		APPROVAL(核准):		SCALE(比例): 1:XX	X° .XX°	SIZE: A4	3			
DWG NO(圖號):						SHEET 1/1	4			

东莞华连电子有限公司






(產品)




(PE袋)

包裝封口處

標籤



(內箱規格:38*26.5*13cm)

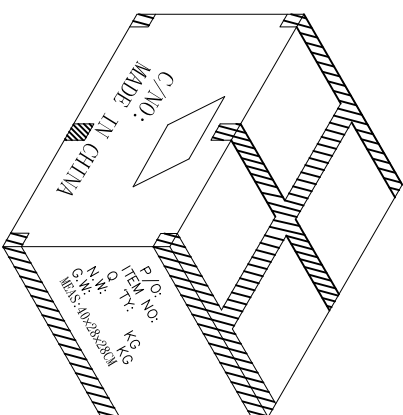

(2內箱裝1外箱)

1. 紙箱規格:外箱40*28*28cm (單重:620g)
內箱規格:38*26.5*13cm(單重:280g).
2. 當為零數出貨時以塑膠袋包裝再裝至最小箱.
3. 封箱方式(看上图所示):外箱四周使用透明的
封箱膠帶封住,并封成王字型.

PIN數	包材規格	每袋數量	包裝方式	單重/g	PIN數	包材規格	每袋數量	包裝方式	單重/g
1*1	15X15	1000/PCS	散裝	0.02284	1*26	15X15	200/PCS	散裝	0.57100
1*2	15X15	1000/PCS	散裝	0.04568	1*27	15X15	200/PCS	散裝	0.59384
1*3	15X15	1000/PCS	散裝	0.06852	1*28	15X15	200/PCS	散裝	0.61668
1*4	15X15	1000/PCS	散裝	0.09136	1*29	15X15	200/PCS	散裝	0.63952
1*5	15X18	1000/PCS	散裝	0.11420	1*30	15X15	200/PCS	豎立	0.66256
1*6	15X18	1000/PCS	散裝	0.13704	1*31	18X20	200/PCS	豎立	0.68520
1*7	15X15	1000/PCS	散裝	0.15988	1*32	18X20	200/PCS	豎立	0.70804
1*8	15X15	1000/PCS	散裝	0.16096	1*33	18X20	200/PCS	豎立	0.73088
1*9	15X15	1000/PCS	散裝	0.18272	1*34	18X20	200/PCS	豎立	0.75372
1*10	15X15	1000/PCS	散裝	0.20556	1*35	18X20	200/PCS	豎立	0.77656
1*11	15X15	1000/PCS	散裝	0.22840	1*36	18X20	200/PCS	豎立	0.79940
1*12	15X15	1000/PCS	散裝	0.25124	1*37	18X20	200/PCS	豎立	0.82224
1*13	15X15	1000/PCS	散裝	0.27408	1*38	18X20	200/PCS	豎立	0.84508
1*14	18X20	1000/PCS	散裝	0.29692	1*39	18X20	200/PCS	豎立	0.86792
1*15	18X20	1000/PCS	散裝	0.31976	1*40	18X20	200/PCS	豎立	0.89076
1*16	18X20	1000/PCS	散裝	0.34260	1*41	18X20	200/PCS	豎立	0.91360
1*17	18X20	1000/PCS	散裝	0.36544	1*42	18X20	200/PCS	豎立	0.93644
1*18	18X20	1000/PCS	散裝	0.38828	1*43	18X20	200/PCS	豎立	0.95928
1*19	18X20	500/PCS	散裝	0.41112	1*44	18X20	200/PCS	豎立	0.98212
1*20	18X20	500/PCS	散裝	0.43396	1*45	18X20	200/PCS	豎立	1.00496
1*21	18X20	500/PCS	散裝	0.45680	1*46	18X20	200/PCS	豎立	1.02780
1*22	18X20	500/PCS	散裝	0.47964	1*47	18X20	200/PCS	豎立	1.05064
1*23	18X20	500/PCS	散裝	0.50248	1*48	18X20	200/PCS	豎立	1.07348
1*24	18X20	500/PCS	散裝	0.52532	1*49	18X20	200/PCS	豎立	1.09632
1*25	18X20	500/PCS	散裝	0.54816	1*50	18X20	200/PCS	豎立	1.11916

DESCRIPTION(內容):

1.27mm Pin Header H:2.54 90° □=0.40
(環保材料)

DRAWN(製圖): 鄧文廣

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差)

尺寸公差: ±0.1mm
角度公差: ±0.5°
位置公差: ±0.1mm

REV: A/1

UNIT: mm

SHEET: 1/1

REV

SIZE: A4

4

DESCRIPTION

DATE

2009.06.25

东莞华连电子有限公司

PART NO:
(料 號) P501-R2XX-040/025-XX(包裝圖)
DWG NO(圖號):

A

B

C

D

E

FILE NO: CWJ-4E-09