
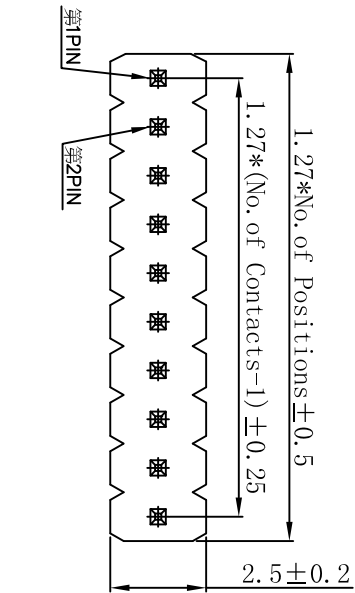


P. C. B Hole Layout

Specifications

Current Rating	: 1 Amp
Insulator Resistance	: 1000 Megohms Min.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40 °C ~ +105°C
Contact Material	: Copper Alloy
Insulator Material	: Polyester, UL 94V-0
Standard Finish	: Nylon-6T
Standard	: Gold Plated
Standard	: Gold Flash all over

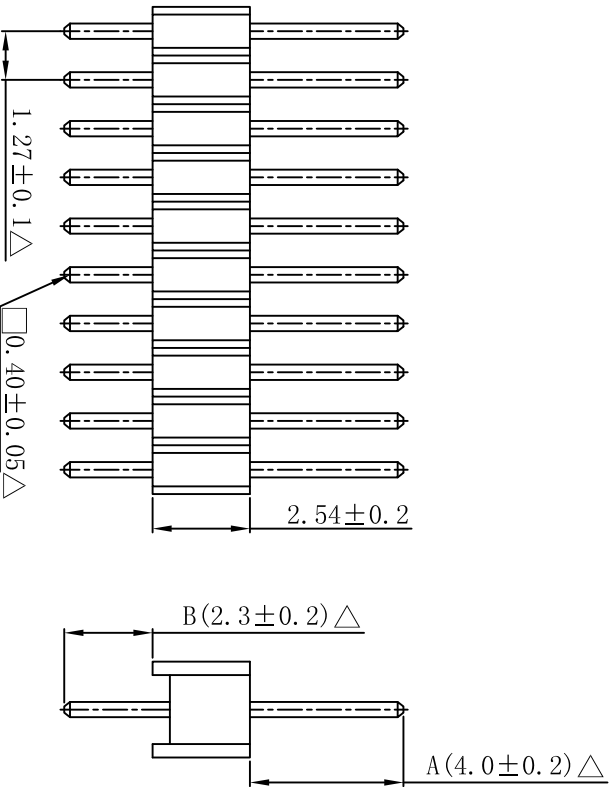

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
P501	-	X	X	A / B	X X
(Pin Header Single Row)	S: Straight Type	G: Gold Flash	N: Nylon-6T	A	(01 TO 50 Contacts)
P501 (H: 2.54 W: 2.5)	...	T: Tin Plated		B	
		A: 10U" Gold	(Standard: N)		
		B: 15U" Gold			
		C: 20U" Gold			

©Duplex Plating
D: Gold Flash/Tin (Standard: G)

(If you desire on other length, by marking put desired in the A/B)

DESCRIPTION(内容):

1.27mm Pin Header H:2.54 180° □=0.40 (RoHs)

DRAWN(製圖):

鄧文廣

CHECKED(確認):

鄧文廣

GENERAL TOLERANCE:

(公差)

X.	±0.30	X.°	±5.0°
X.	±0.20	X.°	±3.0°
.XX	±0.15	.XX°	±1.0°

REV:

A/1

REV

1

DESCRIPTION

△此符號表示重點管控尺寸

DATE

2016.07.01

PART NO:

料號 P501-SG_-040/023-XX

DWG NO(圖號):

东莞华连电子有限公司

A

B

C

D

E

FILE NO: CWJ-4E-09