
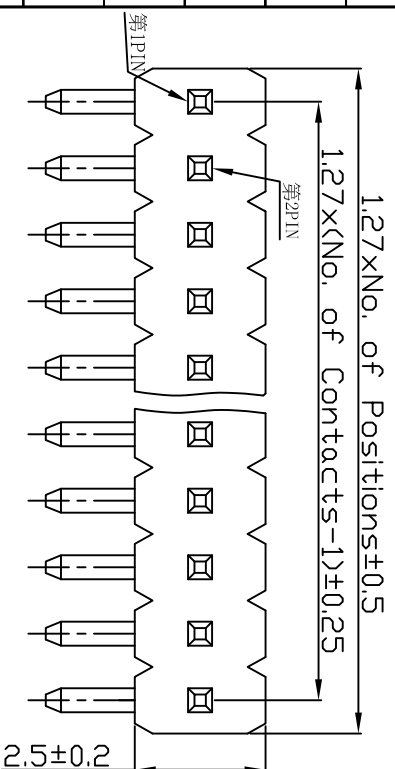


Specifications

Current Rating	: 1 Amp
Insulator Resistance	: 1000 Megohms Min.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40° C ~ +105° C
Contact Material	: Phosphor Bronze
Insulator Material	: Polyester, UL 94V-0
Standard	: Nylon-6T
Finish	: Gold Plated
Standard	: Gold Flash all over

P.C.B Hole Layout

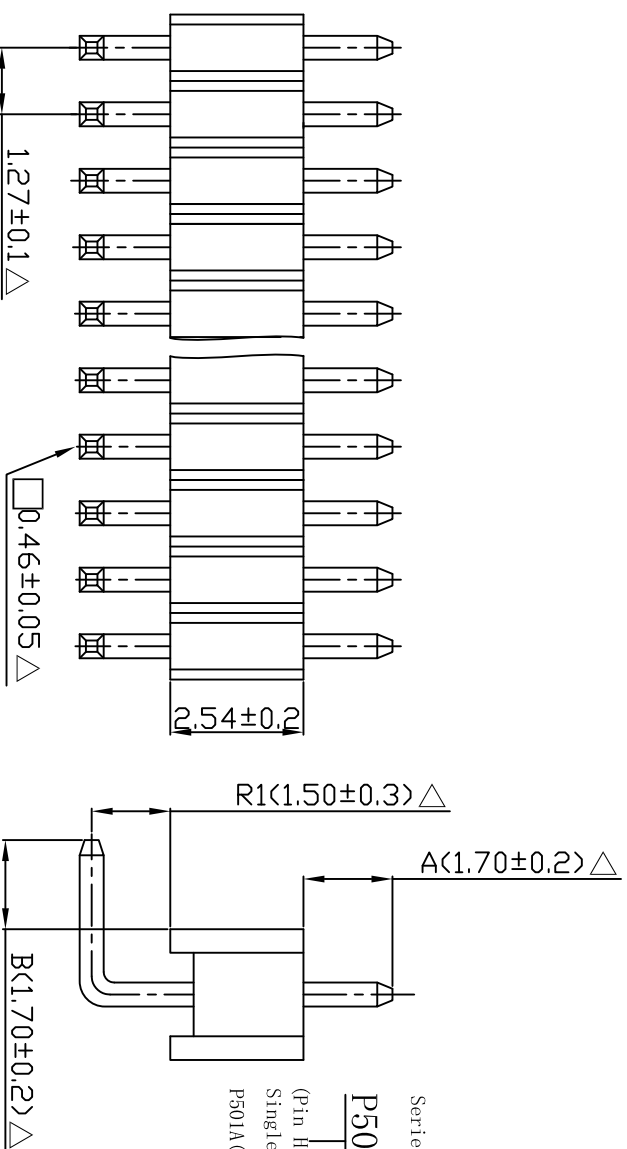



Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
P501A	- X	X	X -	A / B	X X
(Pin Header Single Row)	R:Right Angle Type (Down Angle Type) R1:1.45" L. 55mm P501A(H:2.54 W:2.5)	G:Gold Flash C:ICP T:Tin Plated N:Nylon-6T A:10U"Gold (Standard:N) B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin AP:磷銅鍍足10U"Gold (Standard:A)	A B (017) (017) Contacts) (If you desire on other length, by marking put desired in the A/B)		(01 TO 50

3

3



DESCRIPTION(內容):		DRAWN(製圖): 邓文丁		GENERAL TOLERANCE: (公差)		REV: A/1	REV	DESCRIPTION	DATE
1.27mm Pin Header H:2.54 90° □=0.46 方针磷铜镀足10U"金 (RoHS)		CHECKED(確認):		X. ±0.30 X. ° ±5.0° .XX ±0.20 X. ° ±3.0° .XX ±0.15 .XX ±1.0°		UNIT: mm	1	△ 此符号表示重要管控尺寸	2020.04.30
		APPROVAL(核准):		SCALE(比例):		SIZE:	2		
		(料 號) P501-A-R1AP_-017-017-XX		1:XX		A4	3		
DWG NO(圖號): RDA200430-001						SHEET 1/1	4		

东莞华连电子有限公司

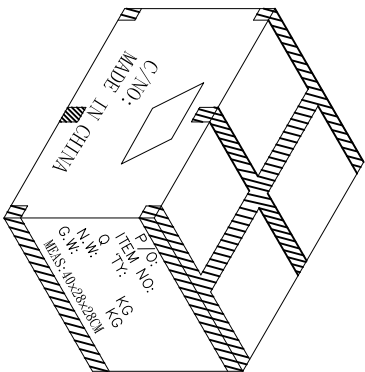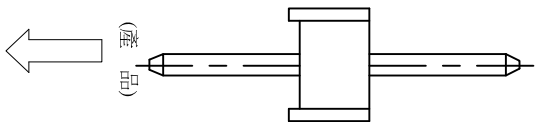

(2內箱裝1外箱)

V017

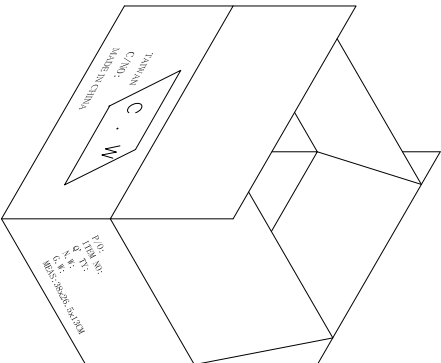

(內箱規格: 38*26.5*13cm)

PIN數	包材規格	每袋數量	包裝方式	PIN數	包材規格	每袋數量	包裝方式
1*2	V017+15X15	1000/PCS	散裝	1*26	V017+15X15	200/PCS	散裝
1*3	V017+15X15	1000/PCS	散裝	1*27	V017+15X15	200/PCS	散裝
1*4	V017+15X15	1000/PCS	散裝	1*28	V017+15X15	200/PCS	散裝
1*5	V017+15X15	1000/PCS	散裝	1*29	V017+15X15	200/PCS	散裝
1*6	V017+15X15	1000/PCS	散裝	1*30	V017+15X15	200/PCS	散裝
1*7	V017+15X15	1000/PCS	散裝	1*31	V017+18X20	200/PCS	散裝
1*8	V017+15X15	1000/PCS	散裝	1*32	V017+18X20	200/PCS	散裝
1*9	V017+15X15	1000/PCS	散裝	1*33	V017+18X20	200/PCS	散裝
1*10	V017+15X15	1000/PCS	散裝	1*34	V017+18X20	200/PCS	散裝
1*11	V017+15X15	1000/PCS	散裝	1*35	V017+18X20	200/PCS	散裝
1*12	V017+15X15	1000/PCS	散裝	1*36	V017+18X20	200/PCS	散裝
1*13	V017+15X15	500/PCS	散裝	1*37	V017+18X20	200/PCS	散裝
1*14	V017+18X20	500/PCS	散裝	1*38	V017+18X20	200/PCS	散裝
1*15	V017+18X20	500/PCS	散裝	1*39	V017+18X20	200/PCS	散裝
1*16	V017+18X20	500/PCS	散裝	1*40	V017+18X20	200/PCS	散裝
1*17	V017+18X20	500/PCS	散裝	1*41	V017+18X20	200/PCS	散裝
1*18	V017+18X20	500/PCS	散裝	1*42	V017+18X20	200/PCS	散裝
1*19	V017+18X20	500/PCS	散裝	1*43	V017+18X20	200/PCS	散裝
1*20	V017+18X20	500/PCS	散裝	1*44	V017+18X20	200/PCS	散裝
1*21	V017+15X15	200/PCS	散裝	1*45	V017+18X20	200/PCS	散裝
1*22	V017+15X15	200/PCS	散裝	1*46	V017+18X20	200/PCS	散裝
1*23	V017+15X15	200/PCS	散裝	1*47	V017+18X20	200/PCS	散裝
1*24	V017+15X15	200/PCS	散裝	1*48	V017+18X20	200/PCS	散裝
1*25	V017+15X15	200/PCS	散裝	1*49	V017+18X20	200/PCS	散裝
				1*50	V017+18X20	200/PCS	散裝

3

2

1

3

2

1

东莞华连电子有限公司

DESCRIPTION(內容)		DRAWN(製圖)		GENERAL TOLERANCE: (公差)		REV: A/1		DESCRIPTION		DATE	
1.27mm Pin Header H:2.54 90° =0.46		邓文广		.X .XX .XXX .XXX .XX° .XX°		UNIT: mm				2021.05.19	
方针磷铜镀足10U"金 (RoHS)		CHECKED(確認):		SCALE(比例):		SIZE: A4					
PART NO: P501A-R1AP_-017/017-XX(包裝圖)		APPROVAL(核准):		1:XX		SHEET: 1/1					
(料 號)											
DWG NO(圖號):											

A

B

C

D

E

FILE NO: CWJ-4E-09