

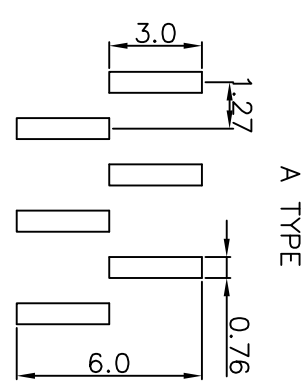
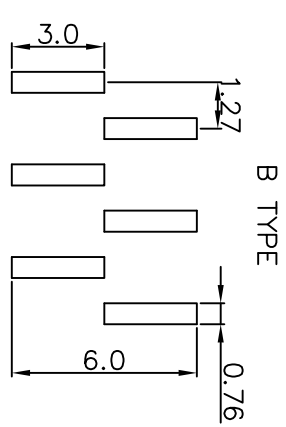
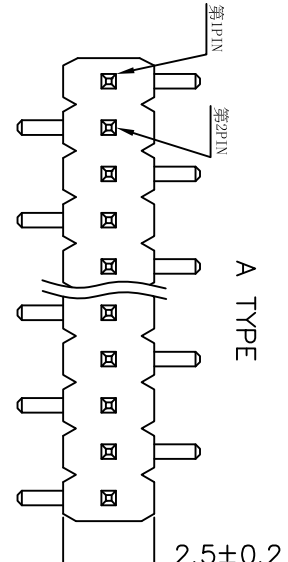
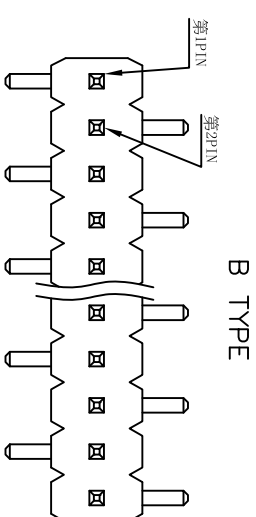


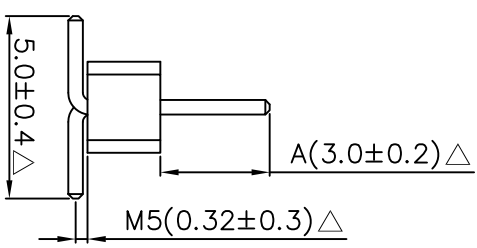

Specifications

Current Rating	: 1 Amp
Insulator Resistance	: 1000 Megohms Min.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40°C ~ +105°C
Soldering Temperature	: 260°C for 3~5s Max.
Contact Material	: Copper Alloy
Insulator Material	: Polyester, UL 94V-0
Standard	: Nylon-6T
Finish	: Gold Plated
Standard	: Gold Flash all over

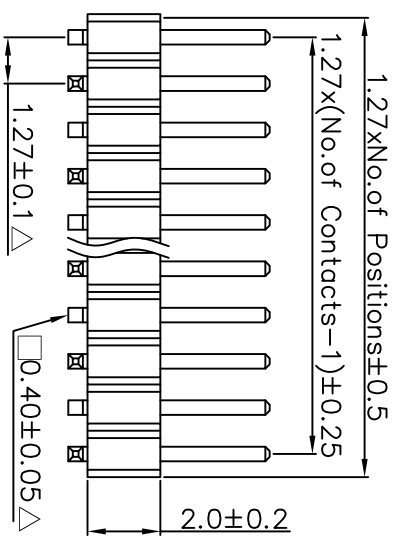

Series	P502	Connector Type	X	Contact Plating	X	Material	X	Pin Length mm	A	Number of Contacts	X X	A、B TYPE	XT
(Pin Header Single Row)		M: SMT Type		G: Gold Flash		N: Nylon-6T							
P502 (H: 2.0mm 開5.0)		M5: 0.32mm		T: Tin Plated		(Standard: N)							
				A: 10U"Gold									
				B: 15U"Gold									
				C: 20U"Gold									
				◎Duplex Plating									
				D: Gold Flash/Tin									
				(Standard: G)									

(If you desire on other length, by marking put desired in the A)

DESCRIPTION(内容):	DRAWN(製圖): 黄炳秋		GENERAL TOLERANCE: (公差)		REV: A/1	REV	DESCRIPTION	DATE
1.27mm Pin Header H:2.0 SMT □=0.40 (RoHS)	CHECKED(確認):	.X .XX .XXX	.XXXX .X° .XX°	UNIT: mm	1	1	△此符号表示重點管控尺寸	2024.05.03
PART NO: P502-M5G_-030-XX-XT (料 號)	APPROVAL(核准):	SCALE(比例): 1:XX	SHEET: A4	SIZE: 2	2	2		
DWG NO(圖號):					3	3		
					4	4		

东莞华连电子有限公司

A


B

C



D

E

FILE NO: CWJ-4E-09





(產品)

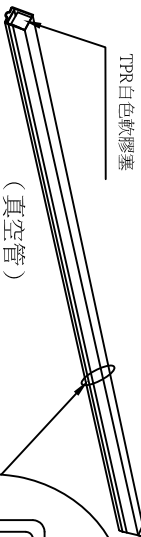



TPR白色軟膠塞

(真空管)

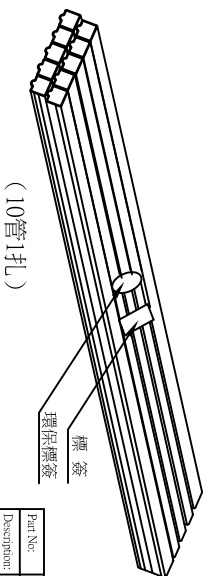

(10管1扎)

料號	品名規格	數量	日期
Part No.	Description	Quantity	Date

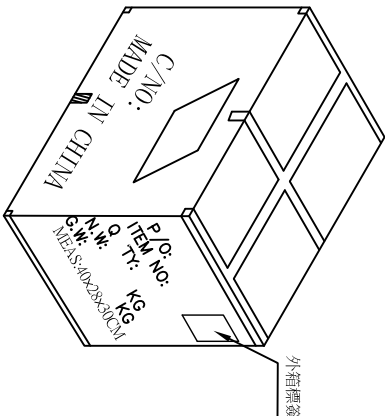

(80扎裝1外箱)

PIN數	包材名稱	每管數量
1*2	PE+V001	500PCS
1*6	P082-1	40/PCS
1*10	P082-1	24/PCS

- 真空管規格：325x6.5x7.8mm (單重:8.3g)
- 外箱規格：40x28x30cm (單重:620g)
- 注未夠一整箱,請酌量選箱進行包裝

DESCRIPTION(內容):

1.27mm Pin Header H:2.0 SMT □=0.40
(RoHS)

DRAWN(製圖):

黃梓秋

CHECKED(確認):

.X
.XX
.XXX

GENERAL TOLERANCE:

(公差)

.XXXX
.X°
.XX°

APPROVAL(核准):

SCALE(比例):

1:XX



REV:

A/1

REV

1

DESCRIPTION

DATE

2024.05.03

东莞华连电子有限公司

PART NO:

P502-M5G_-030-XX-XT

(料號)

DWG NO(圖號):

A

B

C

D

E

FILE NO: CWJ-4E-09