
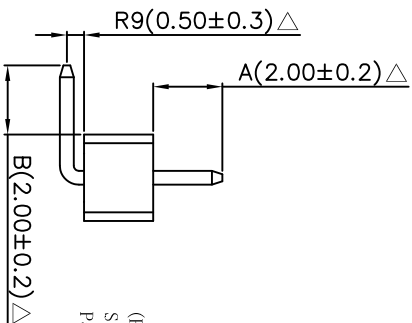


P.C.B Hole Layout

Specifications

Current Rating	: 1 Amp
Insulator Resistance	: 1000 Megohms Min.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40°C ~ +105°C
Contact Material	: Copper Alloy
Insulator Material	: Polyester, UL 94V-0
Standard Finish	: Nylon-6T
Standard	: Gold Plated
	: Gold Flash all over

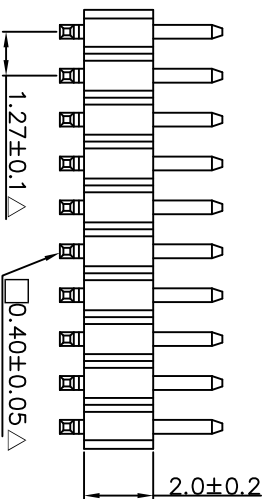

Series	P502	Connector Type	X	Contact Plating	X	Material	X	Pin Length	A / B	Number of Contacts	XX
(Pin Header Single Row)		R:Right Angle		TypeG:Gold Flash	N:Nylon-6T			A		(01 TO 50 Contacts)	
P502 (H: 2.0)		R9:0.5mm		A:100"Gold	(Standard:N)			B			
		∴		B:150"Gold							
				C:200"Gold							
				©Duplex Plating							
				D:Gold Flash/Tin							
				(Standard:G)							

(If you desire on other length, by marking put desired in the A/B)

DESCRIPTION(内容):
1.27mm Pin Header H:2.0 90° □=0.40 (RoHS)

DRAWN(製圖):
黄炳秋

CHECKED(確認):

GENERAL TOLERANCE:
(公差)

REV: A/1

REV

DESCRIPTION

DATE

PART NO: P502-R9G-020/020-XX

(料 號)

DWG NO(圖號):

APPROVAL(核准):

SCALE(比例):

1:XX

SHEET:

4

东莞华连电子有限公司

A


B

C



D

E

FILE NO: CWJ-4E-09




(產品)





(PE袋)


包裝封口處



標籤



(內箱規格:38*26.5*13cm)

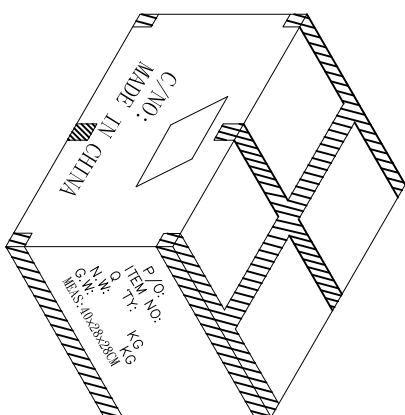

(2內箱裝1外箱)

- 紙箱規格:外箱40*28*28cm (單重:620g)
內箱規格:38*26.5*13cm(單重:280g).
- 當為零數出貨時以塑膠袋包裝再裝至最小箱.
- 封箱方式(看上图所示):外箱四周使用透明的封箱膠帶封住,并封成王字型.

PIN數	包材規格	每袋數量	包裝方式
1*1	15X15	1000/PCS	散裝
1*2	15X15	1000/PCS	散裝
1*3	15X15	1000/PCS	散裝
1*4	15X15	1000/PCS	散裝
1*5	15X18	1000/PCS	散裝
1*6	15X18	1000/PCS	散裝
1*7	15X15	1000/PCS	散裝
1*8	15X15	1000/PCS	散裝
1*9	15X15	1000/PCS	散裝
1*10	15X15	1000/PCS	散裝
1*11	15X15	1000/PCS	散裝
1*12	15X15	1000/PCS	散裝
1*13	15X15	1000/PCS	散裝
1*14	18X20	1000/PCS	散裝
1*15	18X20	1000/PCS	散裝
1*16	18X20	1000/PCS	散裝
1*17	18X20	1000/PCS	散裝
1*18	18X20	1000/PCS	散裝
1*19	18X20	200/PCS	散裝
1*20	18X20	200/PCS	散裝
1*21	15X15	200/PCS	豎立
1*22	15X15	200/PCS	豎立
1*23	15X15	200/PCS	豎立
1*24	15X15	200/PCS	豎立
1*25	15X15	200/PCS	豎立

DESCRIPTION(內容):

1.27mm Pin Header H:2.0 90° □=0.40
(環保材料)

DRAWN(製圖): 黃炳秋

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差)

X .XX .XXX
X° .XX° .XX°

SCALE(比例):

1:XX



REV:

A/1

REV

1

DESCRIPTION

DATE

2024.10.29

东莞华连电子有限公司

PART NO: P502-R3GN-020/020-XX(包裝圖)

(料號)

DWG NO(圖號):

A

B

C

D

E

FILE NO: CWJ-4E-09