
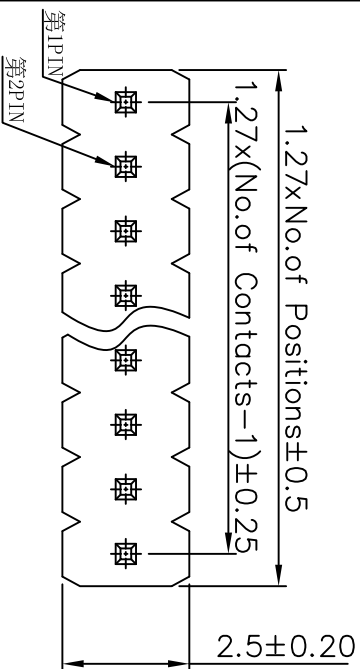


P. C. B. Hole Layout

- Specifications**
- Current Rating : 1 Amp
 - Insulator Resistance : 1000 Megohms Min.
 - Dielectric Withstanding : AC 500 V
 - Operating Temperature : -40°C ~ +105°C
 - Contact Material : Copper Alloy
 - Insulator Material : Polyester, UL 94V-0
 - Standard Finish : Nylon-6T
 - Standard : Gold Plated
 - Standard : Gold Flash all over

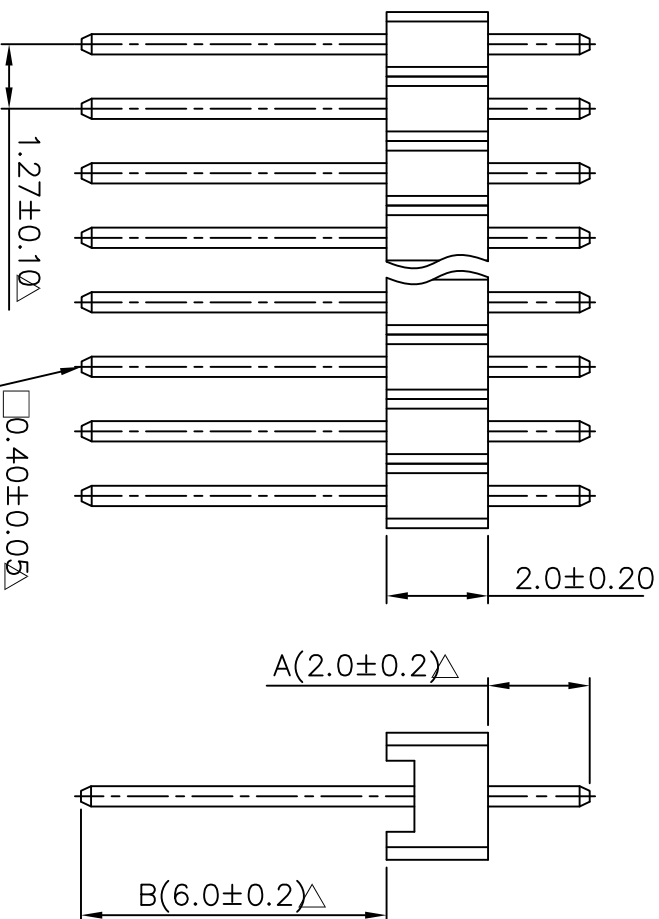

Series Connector Type Contact Plating Material Pin Length mm Number of Contacts

P502 - X X X - A / B - X X

(Pin Header Single Row) S: Straight Type T: Tin Plated (020) (060) (01 TO 50 Contacts)

P502 (H: 2.0 W: 2.5)

A: 10U" Gold
B: 15U" Gold
C: 20U" Gold

©Duplex Plating
D: Gold Flash/Tin

(Standard: G)

(If you desire on other length, by marking put desired in the A/B)

DESCRIPTION(内容):		DRAWN(製圖):		GENERAL TOLERANCE:		REV:	REV	DESCRIPTION		DATE
1.27mm Pin Header H:2.0 180° □=0.40		鄧文廣		(公差)		A/1	1	△此符號表示重點管控尺寸		2019.03.20
CHECKED(確認):		SCALE(比例):		SHEET:		UNIT:	2			
PART NO: P502-SG_-020/060-XX		APPROVAL(核准):		1:XX		mm	3			
(料 號) DWG NO(圖號):						A4	4			
						1/1				

东莞华连电子有限公司