

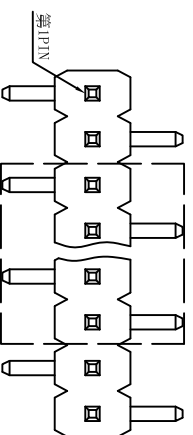



A Type



B Type

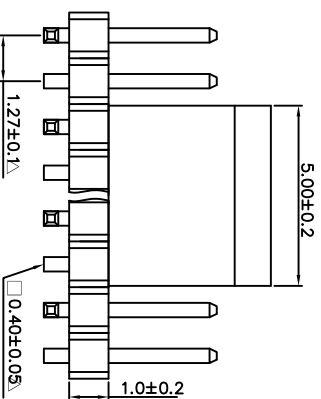


A Type

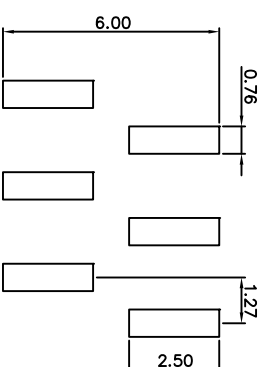

B Type

P.C.B. Hole Layout

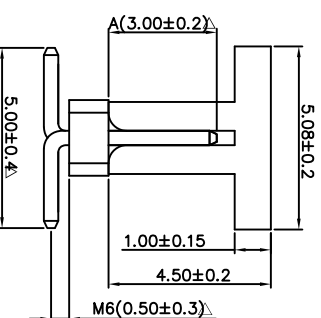



Specifications

Current Rating	: 1 Amp
Insulator Resistance	: 1000 Megohms Min.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40 °C ~ +105°C
Soldering Temperature	: 260 °C for 3~5sec Max.
Contact Material	: Copper Alloy
Insulator Material	: Polyester, UL 94V-0
Standard	: Nylon-6T /LCP
Finish	: cold Plated
Standard	: Cold Flash all over

Series	Connector	Contact	Material	Pin Length	mm	Number of	A, B TYPE	Other
	Type	Plating		A	-	Contacts	XT	RC
<u>P504</u> -	X	X	X	T	-	X X	T	T
(Pin Header Single Row)	M: SMT Type M6-0.5mm	T: Gold Flash N: Ni/60-6T	T: Tin Plated C: 10P	A	(Q30)	(02 TO 50 Contacts)	AT: A TYPE BT: B TYPE	R: REEL C: CAP
P504 (H1: 0 展期5.0)	...		(Standard: N)	(If you desire on other length, by marking put desired in the A)				
			◎Duplex Plating D: Gold Flash/Tin (Standard: G)					

东莞华连电子有限公司


DESCRIPTION(內容):		DRAWN(製圖):	GENERAL TOLERANCE:		REV:	REV	DESCRIPTION	DATE
		黃炳秋	(公差)		A/1			
1. 27mm Pin Header H: 1.0 SMT □ =0.40 REEL+CAP (RoHS)		CHECKED(確認):	X. X. ° X. ° XX ±0.20 ±0.30 ±3.0° XX ±0.15 XX° ±1.0°	UNIT: mm	1	△此符號表示重點管控尺寸	2022. 03. 15	
PART NO: (料 號) P504-M6G--030-XX-XT-RC		APPROVAL(核准):	SCALE(比例): 1:XX		A4 SHEET: 1/1	3 4		
DWG NO(圖號):								

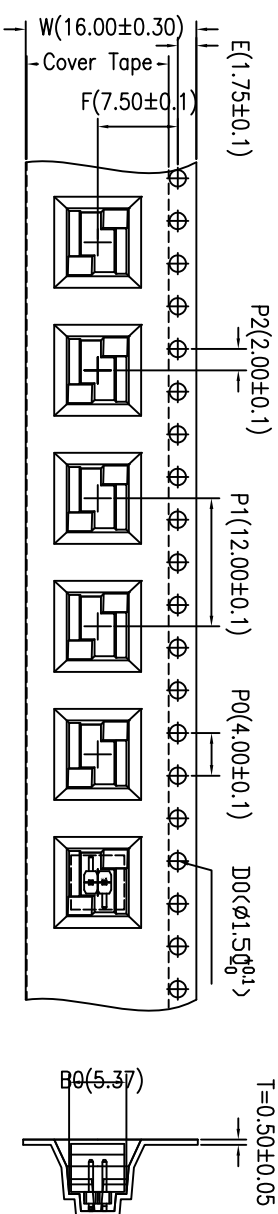

載帶卷料方向

- Notes:
1. 10 sprocket hole pitch cumulative tolerance $\pm 0.20\text{mm}$ (每個鏈輪穿孔累計公差為 $\pm 0.2\text{mm}$)
 2. Carrier camber not to exceed 1mm in 250mm. (傳送料帶彎曲變形度每100mm不超過1mm)
 3. A and B measured on a plane 0.3mm above the bottom of the pocket. A0和B0在同一平面測量且距口袋底部0.3mm)
 4. K measured from a plane on the inside bottom of the pocket to the top surface of the carrier. (K0為口袋底部與材料表面的平面距離。)
 5. All dimensions meet EIA-481-D requirements. (所有尺寸符合EIA-481-D标准要求。)
 6. Material: BLACK polystyrene (材料: 黑色PS。)
 7. Thickness: 0.50 ± 0.05 mm. (厚度: 0.50 ± 0.05 毫米。)
 8. Packing length per 13" reel : 10.2 Meters. (每個13"卷軸包裝長度為10.2 米。)
 9. Component loader per 13" reel : 800pcs. (每個13"卷軸可裝 800PCS 前空14后空10)

注：未注明公差为 ± 0.1 ；
F值以B0为中心；
P2值以A0为中心。

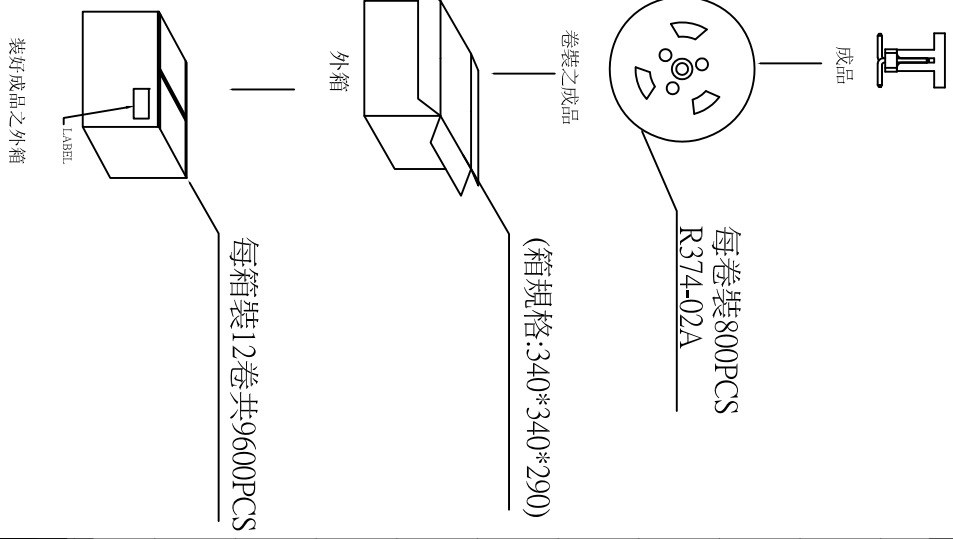

东莞华连电子有限公司

DESCRIPTION(内容):		DRAWN(製圖):		GENERAL TOLERANCE: (公差)		REV:	REV	DESCRIPTION		DATE
1. 27mm Pin Header H:1.0 SMT $\square = 0.40$ REEL-CAP (RoHS)		黃炳秋				A/1	1			2022.03.28
PART NO: P504-M6G_-030-02-AT-RC (包裝圖)		CHECKED(確認):		.X ± 0.30 .XX ± 0.20 .XXX ± 0.10		UNIT: mm	2			
DWG NO(圖號):		APPROVAL(核准):		SCALE(比例): 1:XX		SIZE: A4	3			
						SHEET: 1/1	4			

A

B

C

D

E