

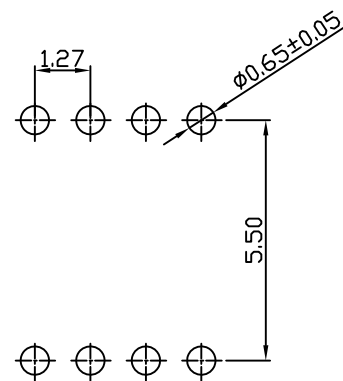
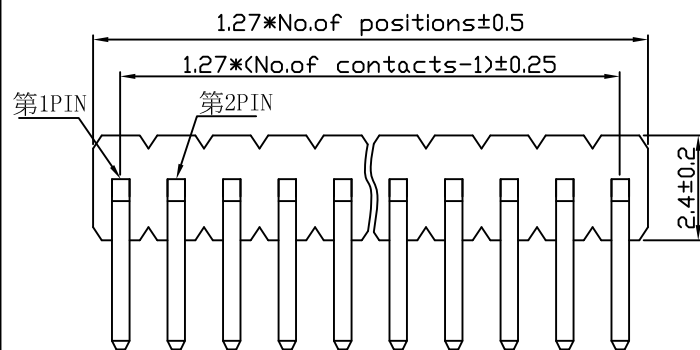


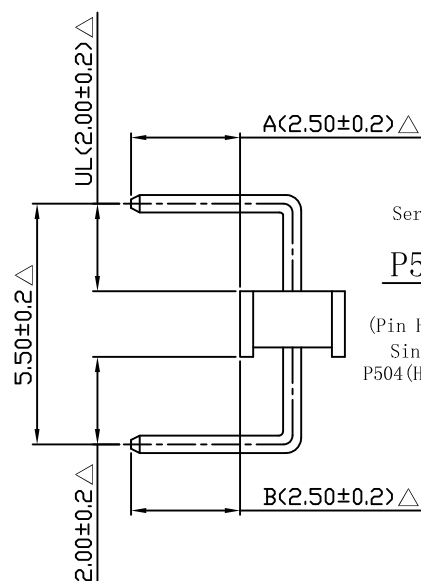

P.C.B Hole Layout

Specifications


Current Rating	:1 Amp
Insulator Resistance	:1000 Megohms Min.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:−40 °C ~ +105°C
Contact Material	:Copper Alloy
Insulator Material	:Polyester, UL 94V-0
Standard	:Nylon-6T
Finish	:Gold Plated
Standard	:Gold Flash all over

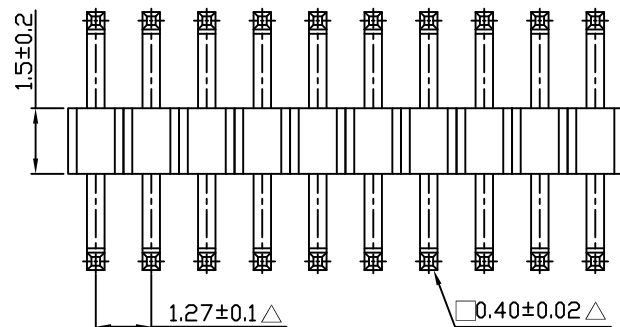


Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts	Other
P504	- X	X	X	- A / B	- X X	- SU
(Pin Header Single Row)	R:Right Angle Type (Down Angle Type)	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	N:Nylon-6T P:PBT (Standard:N)	A (025) B (025) (If you desire on other length, by marking put desired in the A/B)	(01 TO 50 Contacts)	SU:產品同時有上彎和下彎
P504 (H:1.5 W:2.4)	UL:2.0mm ⋮					

东莞华连电子有限公司




DESCRIPTION(內容):	DRAWN(製圖):	GENERAL TOLERANCE:		REV:	REV	DESCRIPTION	DATE
1.27mm Pin Header H:1.5 90° □=0.40 (環保材料)	CHECKED(確認):	.X .XX .XXX	.XXXX .X ° .XX°	UNIT:	1	△此符號表示重點管控尺寸	2013.12.24
				mm	2		
				SIZE:	3		
PART NO: (料 號) P504-ULG_-025/025-XX-SU	APPROVAL(核准):	SCALE(比例):		A4	4		
DWG NO(圖號): RDA131224-002		1:XX		SHEET	1/1		




(產品)



(PE袋)

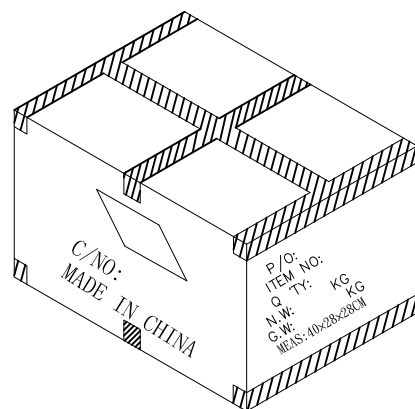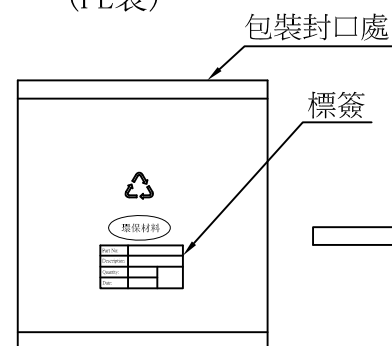

(2內箱裝1外箱)

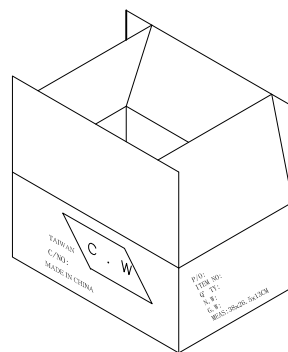

(內箱規格:38*26.5*13cm)

1. 紙箱規格:外箱40*28*28cm (單重:620g)
內箱規格:38*26.5*13cm(單重:280g).
2. 当为零数出货时以塑膠袋包裝再裝至最小箱.
3. 封箱方式(看上图所示):外箱四周使用透明的封箱膠帶封住,并封成王字型.

PIN數	包材規格	每袋數量	包裝方式
1*8	V001+PE15X15	500/PCS	散裝
1*10	15X18	1000/PCS	散裝

东莞华连电子有限公司

DESCRIPTION(內容):
1.27mm Pin Header H:1.5 90° □=0.40
(環保材料)

PART NO:
(料號) P504-ULG_-025/025-XX-SU(包裝圖)

DWG NO(圖號):

DRAWN(製圖):
黃炳秋

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差)

.X .XXX .XXXX
.XX .XX° .XX°
.XXX .XXX° .XXX°

SCALE(比例):
1:XX

REV:
A/1

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV

1

2

3

4

DESCRIPTION

DATE

2013.12.26