
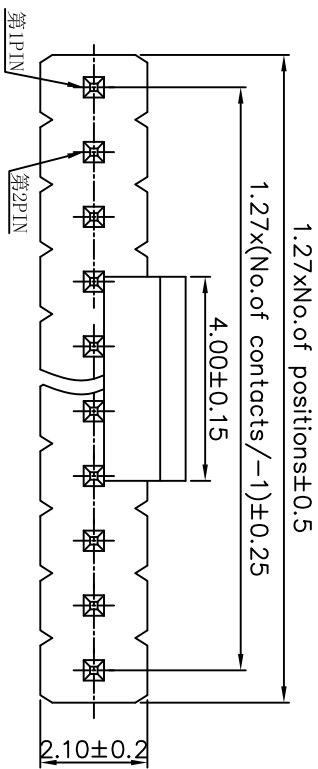
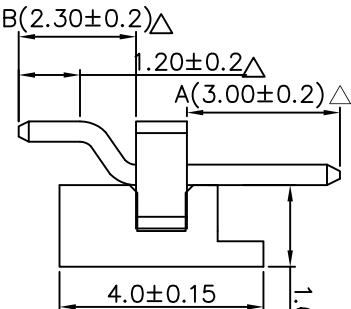


P. C. B HOLE LAYOUT

Specifications

- Current Rating : 1 Amp
- Insulator Resistance : 1000 Megohms Min.
- Dielectric Withstanding : AC 500 V
- Operating Temperature : -40°C ~ +105°C
- Contact Material : Copper Alloy
- Insulator Material : Polyester, UL 94V-0
- Standard : Nylon-6T/LCP
- Finish : Gold Plated
- Standard : Gold Flash all over

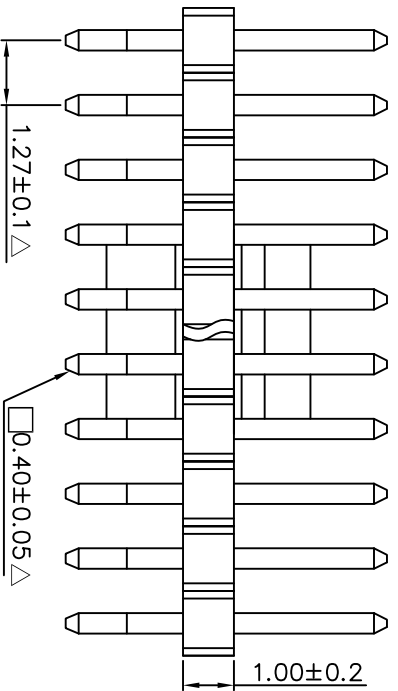

Series	Connector Type	Contact Plating	Material	Pin Length	Number of Contacts	Other
P505	- X	X	X	- A / B	- X X	- RC
(Pin Header Single Row)	K: "K" Type	G: Gold Flash L: LCP		A B	(01 TO 50 Contacts)	R: REEL C: CAP
P505 (H: 1.0 W: 2.1)	⋮	T: Tin Plated N: Nylon-6T		(030) (023)		
		A: 100" Gold B: 150" Gold C: 200" Gold	(Standard: N)			
		© Duplex Plating D: Gold Flash/Tin				
		(Standard: G)				

(If you desire on other length, by marking put desired in the A/B)

东莞华连电子有限公司															
DESCRIPTION(内容): 1.27mm Pin Header H:1.0 □=0.40 卧贴式 REEL+CAP (RoHS)		DRAWN(製圖): 鄧文廣		GENERAL TOLERANCE: (公差)		REV: A/3		REV		DESCRIPTION		DATE			
		CHECKED(確認):				UNIT: mm		1		△此符號表示重點管控尺寸		2015.04.20			
PART NO: (料號): P505-KG_-030/023-XX-RC		APPROVAL(核准):		SCALE(比例): 1:XX				SIZE: A4		3		變更CAP寬度尺寸, 3.5mm改為4.0mm		2016.06.21	
								SHEET: 1/1		4		2016.07.12			

东莞华连电子有限公司

A




B

C

D

E

FILE NO: CWJ-4E-09

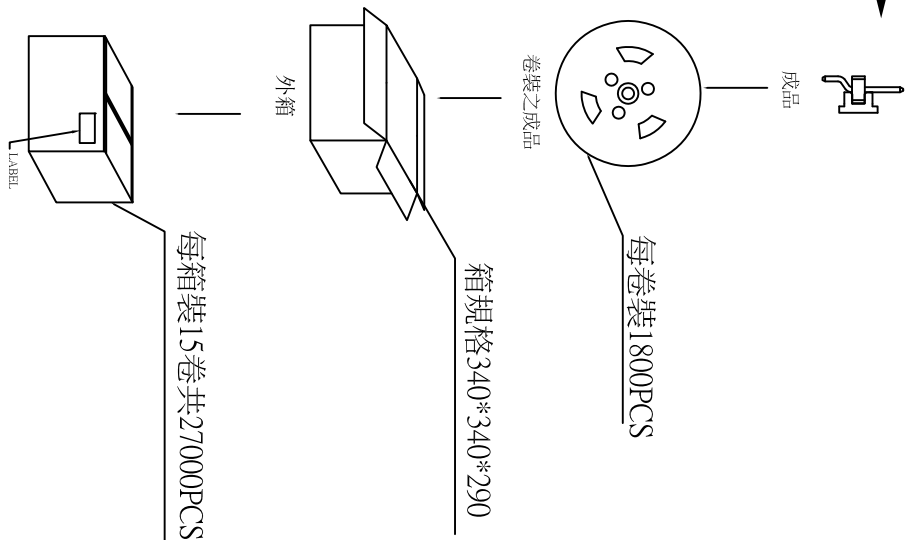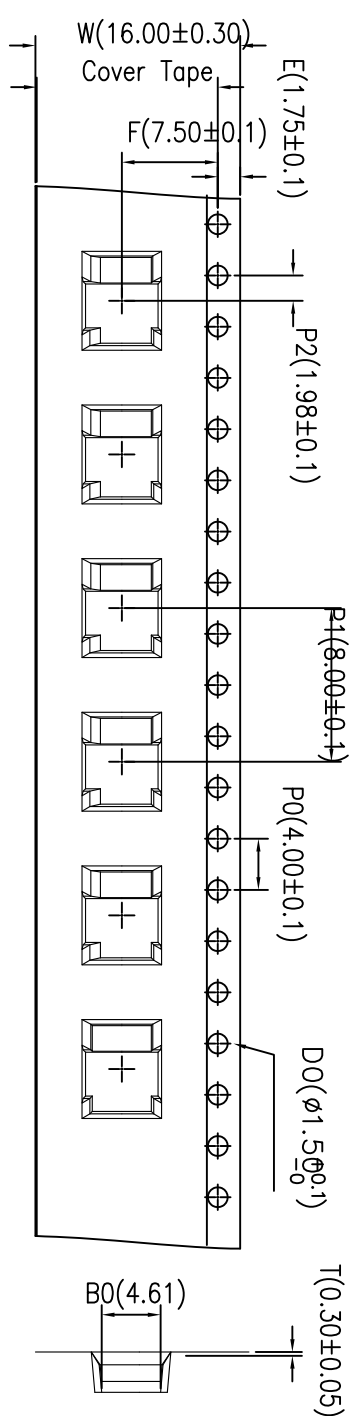

- Notes:
- 1.10 sprocket hole pitch cumulative tolerance ±0.20mm
(每个小链轮齿孔距离公差为±0.20mm)
 - 2.Carrier camber not to exceed 1mm in 250mm.
(传送料带弯曲变形度每250mm不超过1mm)
 - 3.Asand B, measured on a plane 0.3mm above the bottom of the pocket. (A0与B0在同一平面测量且距口袋底部0.3mm)
 - 4.K measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
(K0为口袋底部与材料表面的平面距离。)
 - 5.All dimensions meet EA-481-D requirements.
(所有尺寸符合EA-481-D标准要求。)
 - 6.Material: Conductive Polyethylene.
(材料:透明聚苯乙烯。)
 - 7.Thickness: 0.30 ±0.05 mm.
(厚度: 0.30 ± 0.05毫米。)
 - 8.Packing length per 13" reel : 21.9 Meters.
(每个13"卷轴包装长度为21.9米。)
 - 9.Component loader per 13" reel : 1800 pcs.
(每个13"卷轴可装1800个零件。)

DESCRIPTION(内容):		DRAWN(製圖):		GENERAL TOLERANCE:		REV:	REV	DESCRIPTION		DATE
1.27mm Pin Header H:1.0 □=0.40 臥貼式 REEL+CAP (RoHS)		黃炳秋		(公差)		A/1	1			2023.10.20
PART NO: P505-KGN-030/023-04+RC(包裝圖)		CHECKED(確認):		.x .xx .xxx		UNIT: mm	2			
DWG NO(圖號):		APPROVAL(核准):		SCALE(比例): 1:XX		SIZE: A4	3			
						SHEET: 1/1	4			

东莞华连电子有限公司

注: 未注明公差为±0.1;
F值以B0为中心;
P2值以A0为中心.