
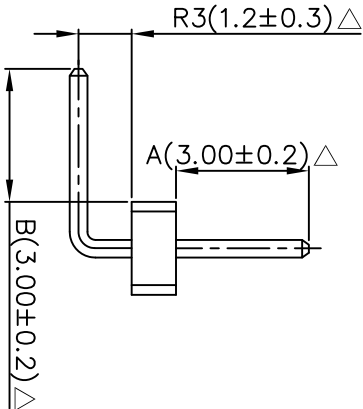
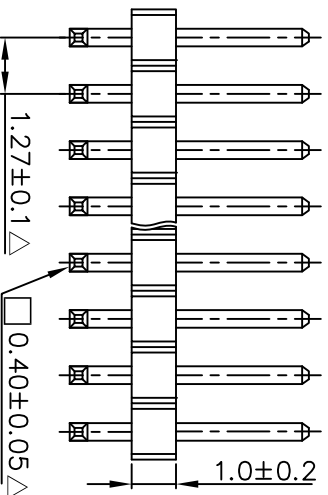


P.C.B Hole Layout

Specifications

Current Rating	: 1 Amp
Insulator Resistance	: 1000 Megohms Min.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40°C ~ +105°C
Insulator Material	: Polyester, UL94V-0
Standard	: Nylon-6T/LCP
Contact Material	: Copper Alloy
Finish	: Gold Plated
Standard	: Gold Flash all over

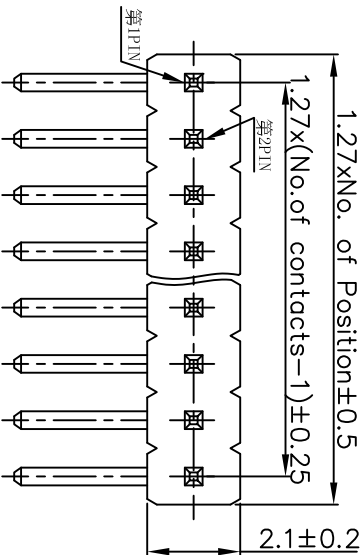

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
P505	-	X	X	A / B	X X
(Pin Header Single Row) P505 (H:1.0 W:2.1) R:Right Angle (Down Angle Type) T:Tin Plated C:LCP (Standard:N) G:Gold Flash N:Nylon-6T A (030) B (030) (01 To 50 Contacts) A:10U"Gold B:15U"Gold C:20U"Gold @ Duplex Plating D:Gold Flash/Tin (Standard:G) (If you desire on other length, by marking put desired in the A/B)					

DESCRIPTION(内容):		DRAWN(製圖):		GENERAL TOLERANCE:		REV:	REV	DESCRIPTION		DATE
1.27/mm Pin Header H:1.0 90° □=0.40 (RoHS)		Beygin Huang		(公差)		A/1		△ 此符号表示重點管控尺寸		2022.02.21
PART NO: P505-R3G_-030/030-XX (料號)		CHECKED(確認):		X. ±0.30 X.° ±5.0°		UNIT: mm	1			
DWG NO(圖號):		APPROVAL(核准):		.XX ±0.15 .XX° ±1.0°		SIZE: A4	2			
		SCALE(比例):		1:XX		SHEET: 1/1	3			
							4			

东莞华连电子有限公司


A

B



C

D



E



(產品)

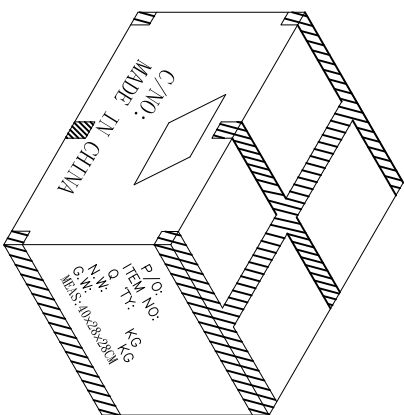




(2內箱裝1外箱)



(PE袋)

包裝封口處

標籤



(內箱規格:38*26.5*13cm)

1. 紙箱規格: 外箱40*28*28cm (單重: 620g)
內箱規格: 38*26.5*13cm (單重: 280g).
2. 當為零數出貨時以塑膠袋包裝再裝至最小箱.
3. 封箱方式(看上图所示): 外箱四周使用透明的封箱膠帶封住, 并封成王字型.

PIN數	包材規格	每袋數量	包裝方式	PIN數	包材規格	每袋數量	包裝方式
1*1	15X15	2000/PCS	散裝	1*26	15X15	200/PCS	散裝
1*2	15X15	2000/PCS	散裝	1*27	15X15	200/PCS	散裝
1*3	15X15	2000/PCS	散裝	1*28	15X15	200/PCS	散裝
1*4	15X15	2000/PCS	散裝	1*29	15X15	200/PCS	散裝
1*5	15X18	2000/PCS	散裝	1*30	15X15	200/PCS	散裝
1*6	15X18	2000/PCS	散裝	1*31	18X20	200/PCS	散裝
1*7	15X18	2000/PCS	散裝	1*32	18X20	200/PCS	散裝
1*8	15X15	1000/PCS	散裝	1*33	18X20	200/PCS	散裝
1*9	15X15	1000/PCS	散裝	1*34	18X20	200/PCS	散裝
1*10	15X15	1000/PCS	散裝	1*35	18X20	200/PCS	散裝
1*11	15X15	1000/PCS	散裝	1*36	18X20	200/PCS	散裝
1*12	15X15	1000/PCS	散裝	1*37	18X20	200/PCS	散裝
1*13	15X15	1000/PCS	散裝	1*38	18X20	200/PCS	散裝
1*14	18X20	1000/PCS	散裝	1*39	18X20	200/PCS	散裝
1*15	18X20	1000/PCS	散裝	1*40	18X20	200/PCS	散裝
1*16	18X20	1000/PCS	散裝	1*41	18X20	200/PCS	散裝
1*17	18X20	1000/PCS	散裝	1*42	18X20	200/PCS	散裝
1*18	18X20	1000/PCS	散裝	1*43	18X20	200/PCS	散裝
1*19	18X20	500/PCS	散裝	1*44	18X20	200/PCS	散裝
1*20	18X20	500/PCS	散裝	1*45	18X20	200/PCS	散裝
1*21	18X20	500/PCS	散裝	1*46	18X20	200/PCS	散裝
1*22	18X20	500/PCS	散裝	1*47	18X20	200/PCS	散裝
1*23	18X20	500/PCS	散裝	1*48	18X20	200/PCS	散裝
1*24	18X20	500/PCS	散裝	1*49	18X20	200/PCS	散裝
1*25	18X20	500/PCS	散裝	1*50	18X20	200/PCS	散裝

DESCRIPTION(內容):

1.27mm Pin Header H:1.0 90° □=0.40
(RoHS)

DRAWN(製圖): 黃炳秋

CHECKED(確認):

APPROVAL(核准):

PART NO: P505-R3G_-030/023-XX(包裝圖)
(料號)

DWG NO(圖號):

GENERAL TOLERANCE:
(公差)

REV: A/1

REV

DESCRIPTION

DATE

UNIT: mm

SIZE: A4

SHEET: 1/1

SCALE(比例): 1:XX

2023.09.21

东莞华连电子有限公司

A

B

C

D

E

FILE NO: CWJ-4E-09