

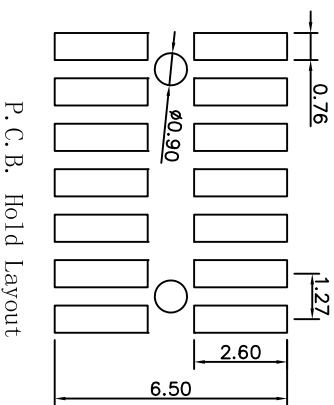
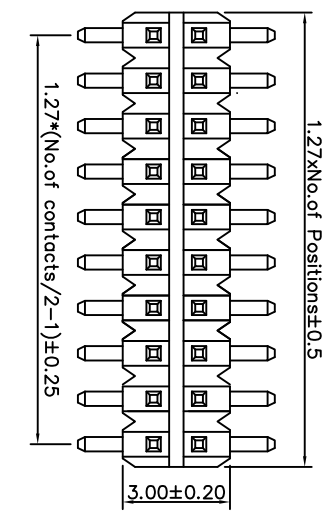


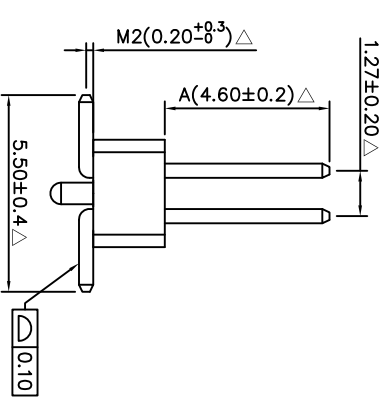

Specifications


Current Rating	: 1 Amp
Insulator Resistance	: 1000 Megohms Min.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40°C ~ +105°C
Soldering Temperature	: 260°C for 3~5sec Max.
Contact Material	: Copper Alloy
Insulator Material	: Polyester, UL 94V-0
Standard Finish	: Nylon-6T
Standard	: Gold Plated
Standard	: Gold Flash all over

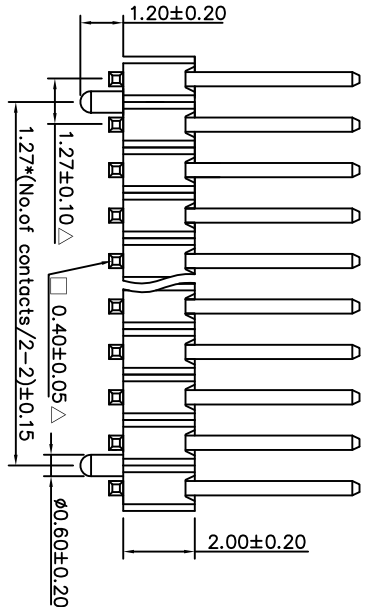

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts	Other
P602	(Pin Header Dual Row)	X	X	A	X X	P
	M: SMT Type M2: 0.2mm					
	G: Gold Flash N: Nylon-6T					
	T: Tin Plated C: LCP					
	A: 10U" Gold (046)					
	B: 15U" Gold (04 10 100)					
	C: 20U" Gold (Standard: N)					
	©Duplex Plating					
	D: Gold Flash/Tin					
	(Standard: 6)					

DESCRIPTION(内容):		DRAWN(製圖):		GENERAL TOLERANCE:		REV:	REV	DESCRIPTION		DATE
1. 27mm Pin Header H: 2.0 SMT □ = 0.40 PEG (RoHS)		黃炳秋		(公差)		A/1	1	△此符號表示重點管控尺寸		2024.07.18
PART NO: P602-M2G_-046-XX-P		CHECKED(確認):		X. ±0.30 X. ° ±5.0°		UNIT: mm	2			
(料 號) DWG NO(圖號):		APPROVAL(核准):		.XX ±0.20 X. ° ±3.0°		SCALE(比例):	3			
				.XX ±0.15 .XX ±1.0°		SHEET: A4	4			
				1:XX		1/1				


东莞华连电子有限公司




(產品)

料號	品名規格
數量	日期
Quantity:	
Date:	

內標籤


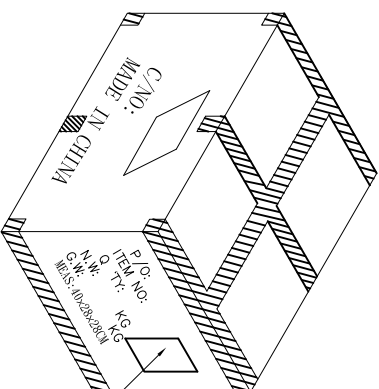


(112裝1箱)

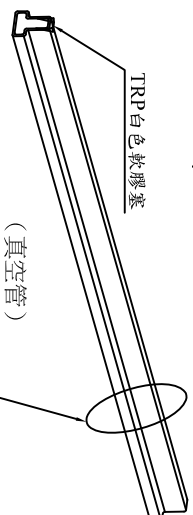

TRP 白色軟膠塞

(真空管)

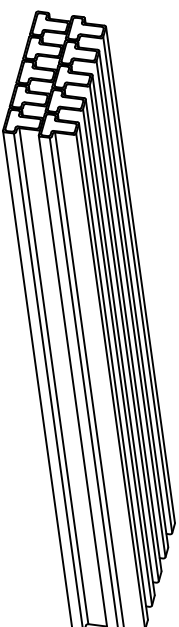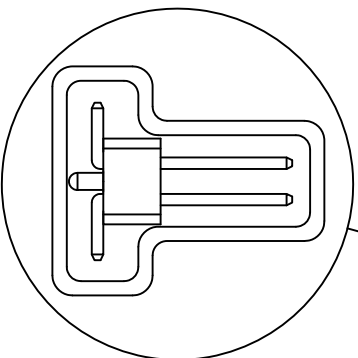

(10管1扎)

- 1.真空管規格：315x9.5x8.0mm (7.5g)
- 2.外箱規格：40x28x30cm (單重:620g)
- 3.數量未夠一箱時請酌量選箱進行包裝

PIN數	包材名稱	每管數量	PIN數	包材名稱	每管數量
			2*26	P054-1	8/PCS
			2*27	P054-1	8/PCS
			2*28	P054-1	8/PCS
			2*29	P054-1	7/PCS
2*5	P054-1	46/PCS	2*30	P054-1	7/PCS
2*6	P054-1	39/PCS	2*31	P054-1	7/PCS
2*7	P054-1	34/PCS	2*32	P054-1	7/PCS
2*8	P054-1	29/PCS	2*33	P054-1	6/PCS
2*9	P054-1	26/PCS	2*34	P054-1	6/PCS
2*10	P054-1	23/PCS	2*35	P054-1	6/PCS
2*11	P054-1	21/PCS	2*36	P054-1	6/PCS
2*12	P054-1	19/PCS	2*37	P054-1	6/PCS
2*13	P054-1	18/PCS	2*38	P054-1	5/PCS
2*14	P054-1	16/PCS	2*39	P054-1	5/PCS
2*15	P054-1	15/PCS	2*40	P054-1	5/PCS
2*16	P054-1	14/PCS	2*41	P054-1	5/PCS
2*17	P054-1	13/PCS	2*42	P054-1	5/PCS
2*18	P054-1	12/PCS	2*43	P054-1	5/PCS
2*19	P054-1	12/PCS	2*44	P054-1	5/PCS
2*20	P054-1	11/PCS	2*45	P054-1	4/PCS
2*21	P054-1	11/PCS	2*46	P054-1	4/PCS
2*22	P054-1	11/PCS	2*47	P054-1	4/PCS
2*23	P054-1	10/PCS	2*48	P054-1	4/PCS
2*24	P054-1	9/PCS	2*49	P054-1	4/PCS
2*25	P054-1	9/PCS	2*50	P054-1	4/PCS

DESCRIPTION(內容):

1. 27mm Pin Header H:2.0 SMT □=0.40
PEG (RoHS)

DRAWN(製圖): 黃炳秋

CHECKED(確認):

GENERAL TOLERANCE:
(公差)

.X .XXX
.XX .XXX
.X° .XX°

APPROVAL(核准):

SCALE(比例):
1:XX



REV: A/1

REV: 1

DESCRIPTION

DATE

2025.01.07

东莞华连电子有限公司

PART NO: P602-M2G_-046-XX-P(包裝圖)

SCALE(比例):
1:XX



SHEET: 1/1

4