
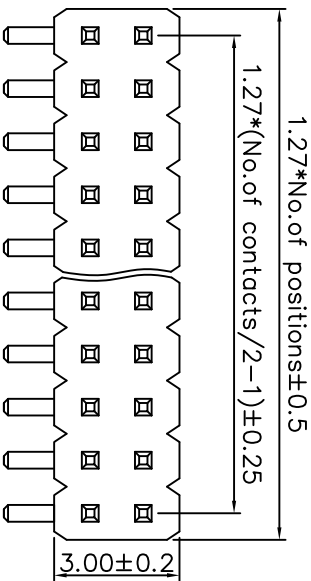


P. C. B Hole Layout

Specifications

Current Rating	: 1 Amp
Insulator Resistance	: 1000 Megohms Min.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40 °C ~ +105°C
Contact Material	: Copper Alloy
Insulator Material	: Polyester, UL 94V-0
Standard	: Nylon-6T
Finish	: Gold or Tin Plated
Standard	: Gold Flash all over

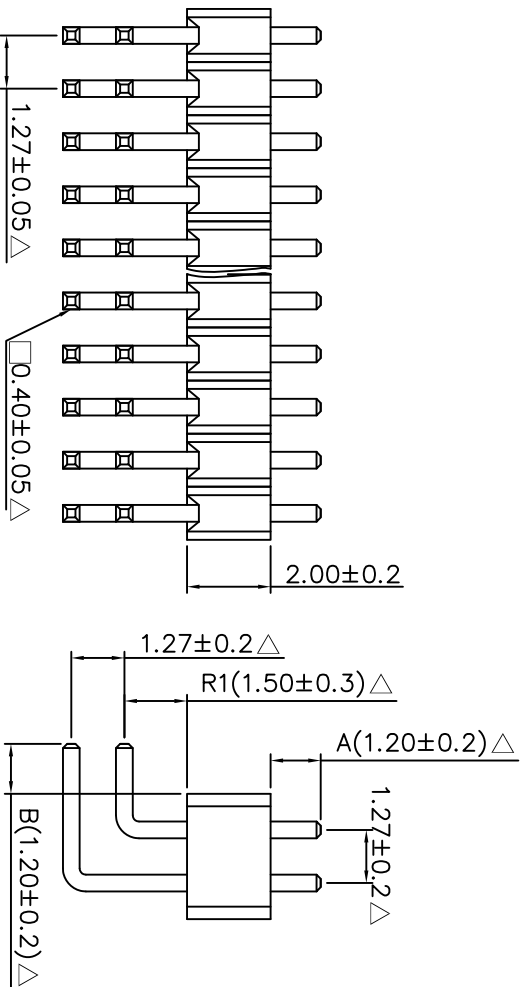

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
P602	- X	X	X	- A / B	X X
(Pin Header Dual Row) R:Right Angle Type G:Gold Flash N:Nylon-6T (Down Angle Type) T:Tin Plated (Standard:N) A A B (04 TO 100 Contacts)					
P602 (H:2.0 W:3.0) R1:1.5mm					
: C:20U"Gold					
©Duplex Plating					
D:Gold Flash/Tin					
(Standard:G)					
(If you desire on other length, by marking put desired in the A/B)					

DESCRIPTION(内容):		DRAWN(製圖):		GENERAL TOLERANCE:		REV:	REV	DESCRIPTION	DATE
1.27mm Pin Header H:2.00 90° □=0.40		黄炳秋		(公差)		A/1			
1.27mm Pin Header H:2.00 90° □=0.40		CHECKED(確認):		.X ±0.25 ANGLES ±1°		UNIT:	1	△此符號表示重點管控尺寸	2024.07.16
镀锡 (RoHS)		.XX ±0.15		.XXX ±0.10		SIZE:	2		
PART NO: P602-R1T_-012/012-XX		APPROVAL(核准):		SCALE(比例):		A4	3		
(料 號)		1:XX		SHEET:		1/1	4		
DWG NO(圖號):									

东莞华连电子有限公司

